

Marielle Wall

WB1920 1.0

GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

This product can be dimmed using a low-voltage electronic dimmer.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

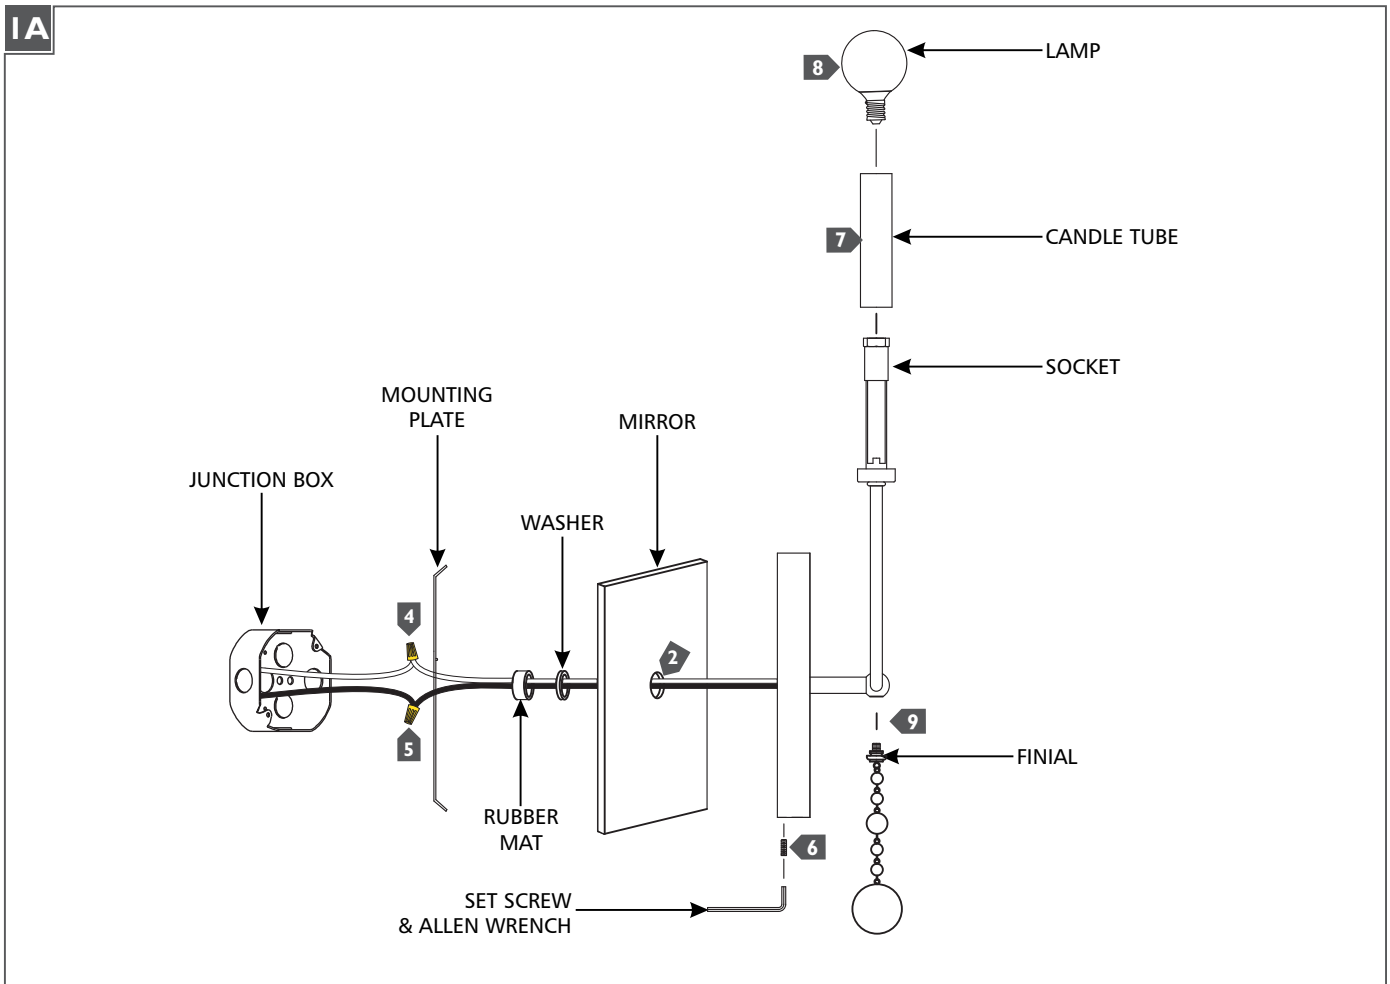

- 1 Secure the mounting plate to the junction box.
- 2 Feed the fixture wires through the mirror, washer, and rubber mat in that order, then insert the mirror into the fixture base followed by the washer and rubber mat as shown.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Mount the fixture base onto the mounting plate and secure it with the set screw using the provided Allen wrench.
- 7 Install the candle tube by sliding it over the socket.
- 8 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage information.
- 9 Screw the finial to the bottom of the fixture.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.