

Reinforced with fiberglass

Skid-resistant floor

## PROFILE®

SHOWER RECEPTOR

# K-9852, K-9858 K-9861

### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

• 60" (152.4cm) x 36" (91.4cm) (K-9852) • 36" (91.4cm) x 36" (91.4cm) (K-9858)

48" (121.9cm) x 36" (91.4cm) (K-9861)

• ANSI Z124.2

**FEATURES** 

Acrylic

- IAPMO/UPC
- State of Massachusetts

#### **COLORS/FINISHES**

- 0 White
- Other Refer to Fixtures Price Book for additional colors

#### **Accessories:**

- CP Polished Chrome
- PB **Polished Brass**
- SV Nevada Silver™
- BR New England Brass™
- Other Refer to Faucets Price Book for additional finishes
- NA None Applicable

#### SPECIFIED MODEL:

Model	Description	Colo	Colors/Finishes	
K-9852	60" (152.4cm) x 36" (91.4cm) shower receptor	□0 White	□Other	
K-9858	36" (91.4cm) x 36" (91.4cm) shower receptor	□0 White	□Other	
K-9861	48" (121.9cm) x 36" (91.4cm) shower receptor	□0 White	□Other	

Recommended Accessories						
K-9132	Drain	□СР	□РВ	□Other		
Optional Accessories						
K-1182	Vinyl tiling-in bead			□NA		
K-9856	Profile pivot shower door (for K-9858)	□SV	□BR	□Other		
K-9859	Profile pivot shower door (for K-9861)	□SV	□BR	□Other		
K-9850	Profile pivot shower door (for K-9852)	□SV	□BR	□Other		

#### PRODUCT SPECIFICATION:

The shower receptor shall be 60"(152.4cm) in length and 36" (91.4cm) in width (K-9852), or 36" (91.4cm) in length and 36" (91.4cm) in width (K-9858), or 48"(121.9cm) in length and 36" (91.4cm) in width (K-9861). Shower receptor shall be made of acrylic reinforced with fiberglass. Shower receptor shall have skid-resistant floor. Shower receptor shall be Kohler Model


# PROFILE®

#### PRODUCT INFORMATION

Fixture:				
Configuration	1-piece			
Weight, K-9852	84 lbs. (38.1 kg)			
Weight, K-9858	50 lbs. (22.7 kg)			
Weight, K-9861	56 lbs. (25.4 kg)			
Drain Outlet	3-3/8" D. (8.6cm)			

#### **INSTALLATION NOTES**

**IMPORTANT:** If a Kohler Profile Shower Door is used with a Kohler receptor, refer to special framing instructions inside the installation instructions for receptor.

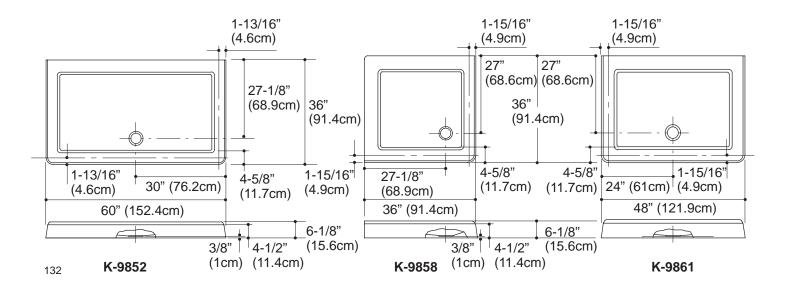

**PRODUCT DIAGRAM** 

