


Assembly Instructions For F2601/8 (E) 12/10

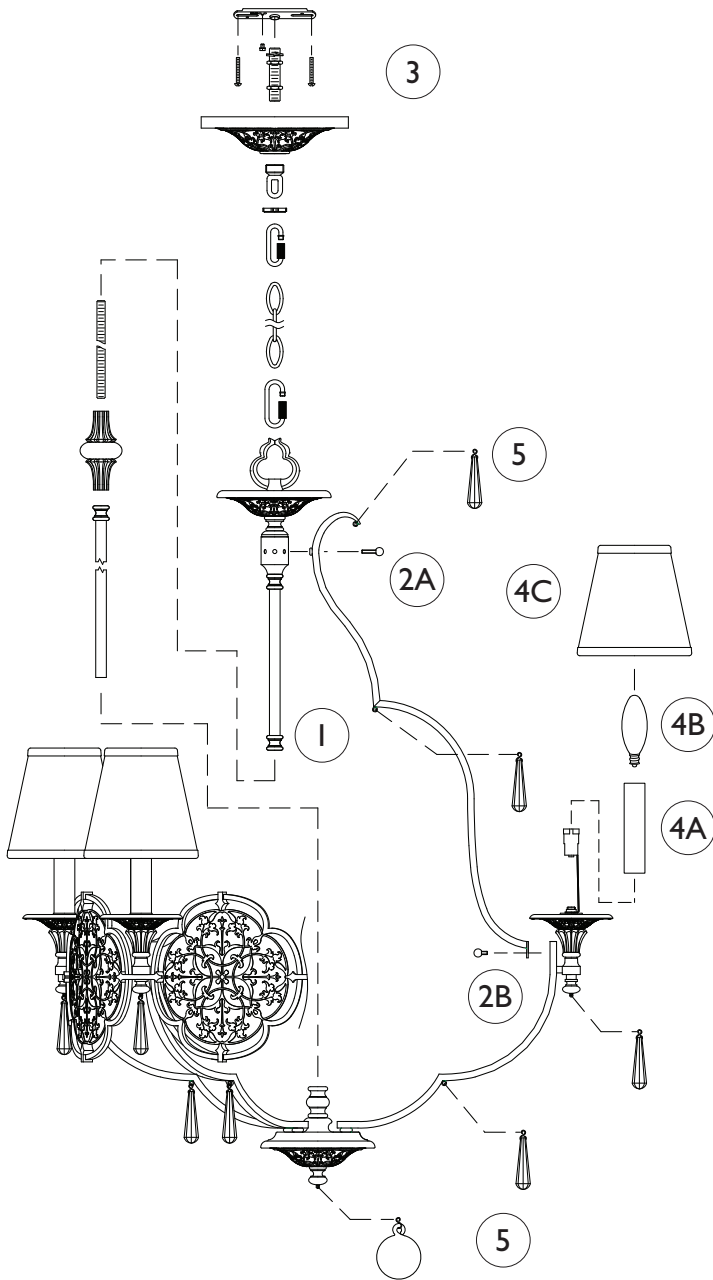


Extra PIN Qty.	PIN PART	PIN DESCRIPTION
8	8	S Hook

Required	X 32	X 1
Extra	4	1

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

- Slip center column down through the fixture wires, and then screw into center of main frame.
- Install upper section of arm by fastening with cap nut onto center column.
 - Secure bottom end of arm by fastening with cap screw onto main frame.
 - Repeat other arms.
- Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
- Install candle tube by slipping through sockets.
 - Install type-B, candelabra base, of 60 Watt maximum bulbs (not included).
 - Install shade by snapping onto bulbs.
- Hang all glass parts as shown on diagram.
NOTE: To replace broken glass or pin, extras are included in hardware bag. Replace by gently bending open pin, remove broken glass or pin, hook new one, then close back pin. Avoid bending pin into sharp angle.



**MURRAY
FEISS**

GENERATION
BRANDS™