
PEG1106009CE Version:1102 Service Manual

Ventilating Fan

(North America Market)

FV-08VRL1



Model No.	Air direction	Voltage (V)	Frequency (Hz)	Duct diameter (inches)	Noise at 0.1"WG (sones)	Power consumption (W)	Speed at 0.1"WG (rpm)	Air volume at 0.1"WG (CFM)	Weight Ib.(_{kg})
FV-08VRL1	Exhaust	120	(0)	4	0.8	20.5	1378	80	8.2(3.7)
	Exnaust	120	60	6	0.8	20.5	1378	80	0.2(3.7)

HVI Certified performance based on HVI Procedures 915,916 and 920.



This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE -

There are special components used in this equipment which are important for safety. These parts are marked by A in the Schematic Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacture. We suggest to handle such parts after the static electricity prevention.


It is forbidden to touch the PCB parts by bare hands during the repairing process.


CONTENTS	PAGE
1 Parts Identification	1~3
2 Wiring Diagram	4
3 Parts List	5~6




FV-08VRL1

Main Body Section

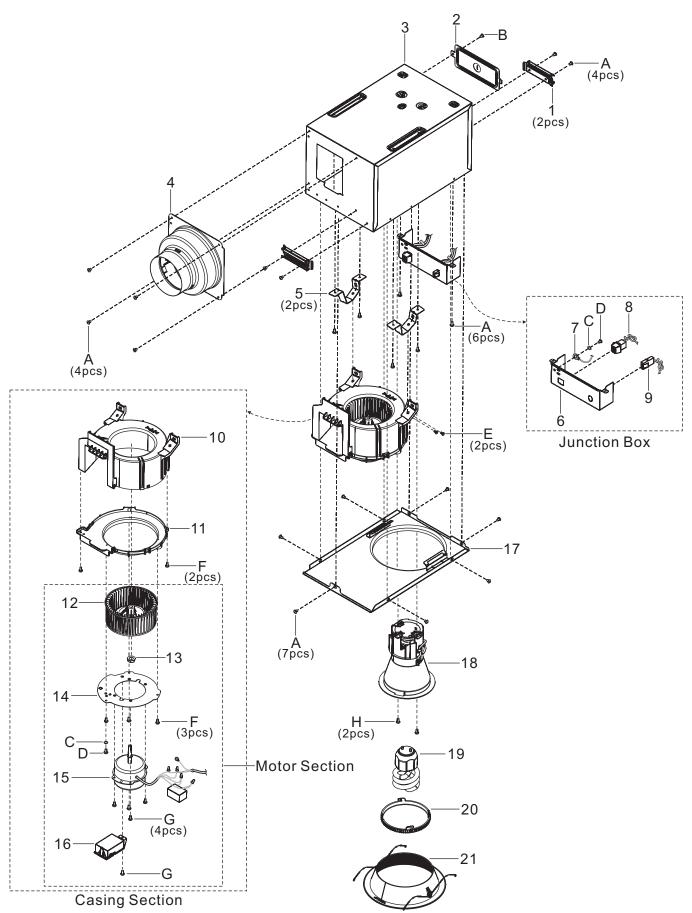

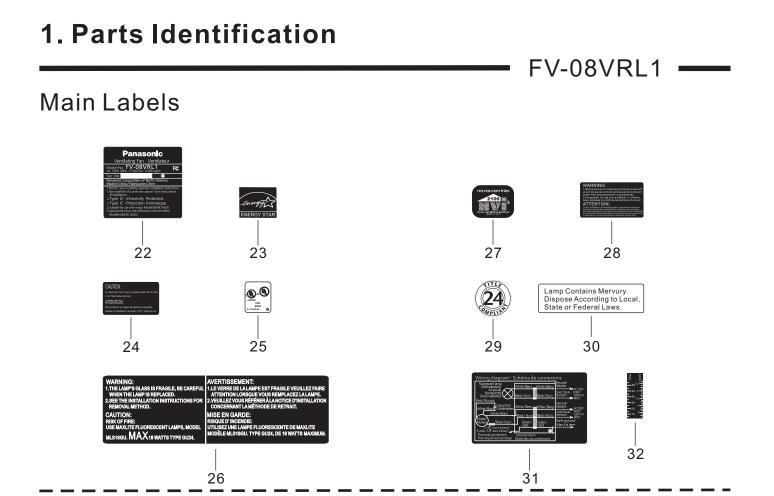


Packing Section

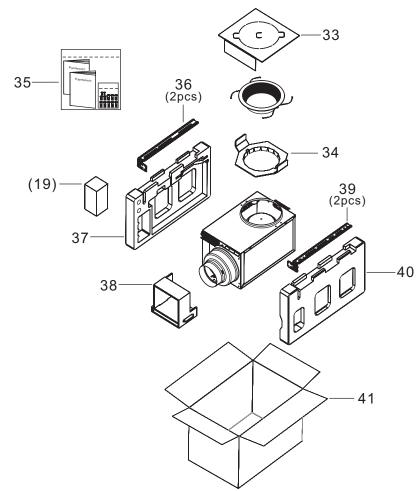

		EV-	-08VRL1
Replace Lamp	o Method		
Step 1.	Step	2.	Step 3.
Remove the trim assen	nbly Remove the la	amp cover	Replace the lamp
Poplaco Moto			
Step 1.	Step 2.	Step 3.	Step 4.
			(Clamp)
Remove 2pcs screws	Unplug light unit assembly connector ,Then take out the whole assembly	Unplug motor unit connector	Pull out the lead wire from Casing clamp
Step 5.	Step 6.	Step 7.	Step 8.
Remove 2pcs screws	Move the casing section to the hole position	Remove 3pcs screws	Take out the motor section
Step 9.	Step 10.	Step 11.	Step 12.
Remove 6pcs screws	Remove the blade fixing nut	Take out the motor unit and condenser box	Replace the motor unit

2. Wiring diagram

FV-08VRL1

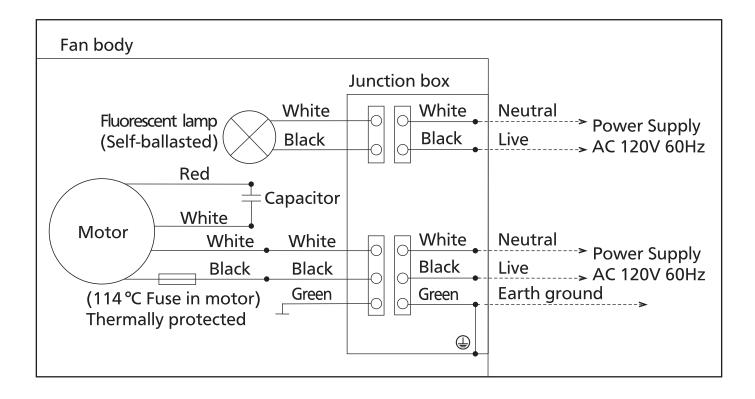

FV-08VRL1 -----

No.	Part No.	Part Name	Q'ty	Remark
1	FFV0420027S	Bracket Cover	2	
2	FFV6710026S	Wiring Cover	1	
3	FFV1600116S	Frame Assembly	1	
4	FFV0000125S	Adapter Assembly	1	
5	FFV0800002S	Casing Support	2	
6	FFV2800015S	Junction Box	1	
7	FFV3402103S	Earth Lead Wire	1	\triangle
8	FFV0900055S	Connector Assembly V	1	\triangle
9	FFV0900056S	Connector Assembly L	1	\triangle
10	FFV0790097S		1	
11	FFV3730091S	Motor Support	1	
12	FFV0400086S	Fan	1	
13	FFV7020021S	Nut	1	
14	FFV3730092S	Motor Set Plate	1	
15	FFV3730093S	Motor Unit	1	\triangle
16	FFV0760050S	Condenser Box	1	
17	FFV1600117S	Frame Cover Assembly	1	
18	FFV3410034S	Light Unit Assembly	1	\triangle
19	FFV3410035S	Lamp	1	
20	FFV3410036S	Lamp Cover	1	
21	FFV5840030S	Trim Assembly	1	
22	FFV4020730S	Name Plate	1	
23	FFV1320001S	ESP Mark	1	
24	FFV6730041S	Warning Label	1	
25	FFV2260003S	UL Mark	1	
26	FFV6730055S	Warning Label	1	
27	FFV2260002S	HVI Mark	1	
28	FFV0810002S	Caution Label	1	
29	FFV4730001S	T24 Mark Label	1	
30	FFV6730056S		1	
31	FFV6730057S	<u> </u>	1	
32	FFV5720015S		1	
33		Trim Plate Assembly	1	
34	FFV5840032S		1	
35	FFV0010217S		1	For USA Market
35	FFV0010218S	· · · · · · · · · · · · · · · · · · ·	1	For CA Market
36		Bracket Assembly 1	2	ļ
37	FFV4710334S	•	1	
38	FFV9001003S		1	
39		Bracket Assembly 2	2	
40	FFV4710335S	Lett Pad	1	

FV-08VRL1 -----

No.	Part No.	Part Name		Remark
41	FFV9001004S	Packing Case Assembly	1	
Α	FFV7000018S	Truss Tap Screw	21	
В	FFV7000108S	Truss Tap Screw	1	
С	FFV7010028S	Spring Washer	2	For Fixing Earth Lead Wire
D	FFV7000200S	Bind Screw	2	For Fixing Earth Lead Wire
E	FFV7000201S	Bind Tap Screw	2	
F	FFV7000073S	Truss Tapping Screw	5	
G	FFV7000079S	Pan Tap Screw	5	
Н	FFV7000202S	Bind Tap Screw	2	