Corva Wall



WALL COLLECTION

GENERAL PRODUCT INFORMATION:



This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is suitable for damp locations.


This product can be dimmed with a standard incandescent dimmer.

This product is designed for vertical mounting only. It cannot be mounted horizontally.

CAUTION-RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN THE POWER TO THE ELECTRICAL BOX OFF.


Install the Fixture Base



 Connect the green ground wire to a suitable ground in accordance with local electrical codes.


2 Connect the neutral 120 volt electrical box wire to the white lamp wire with a wire nut.

Connect the hot 120 volt electrical box wire to the black lamp wire with a wire nut.

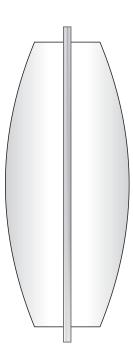


700WSCRVW_

1.1

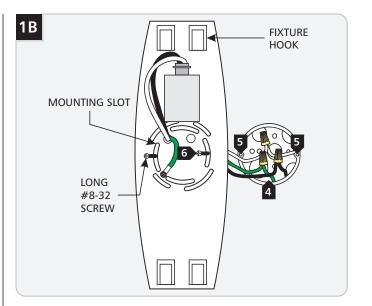

- Feed the wires and wire nut connections into the electrical box.
- Line up two mounting slots with the two electrical box holes. If mounting vertically, make sure the fixture hooks point upward.
- Level the mounting plate and secure it to the electrical box with the two Long #8-32 screws provided.

Install the Lamp and Glass Shade

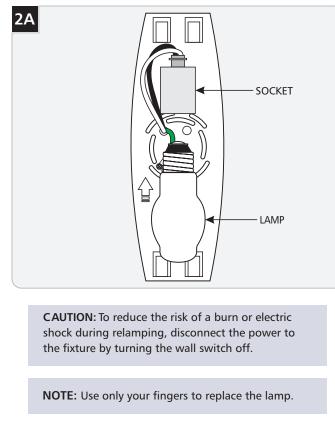

Use **MAX** 120 Volt, **60 Watt** BT15 Medium Base Lamp.

1 Screw the lamp completely into the socket.

SHADE HANGER FIXTURE HOOK SHADE HANGER FIXTURE HOOK



SAVE THESE INSTRUCTIONS!



© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company