1.0




WALL COLLECTION



Mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box.

Suitable for damp locations.


Dimmable with a standard incandescent dimmer.

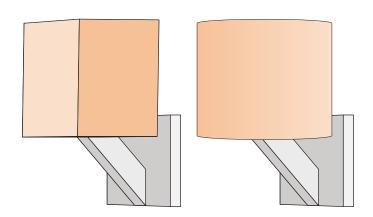


CAUTION—RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN OFF POWER TO THE **ELECTRICAL BOX.**


Install the Fixture

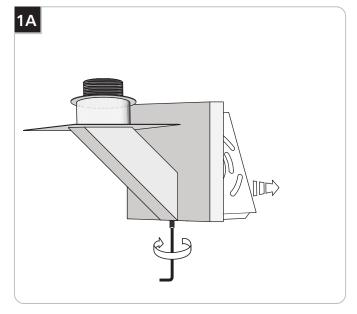


1 Back out the set screw at the bottom of the fixture and remove the backplate.

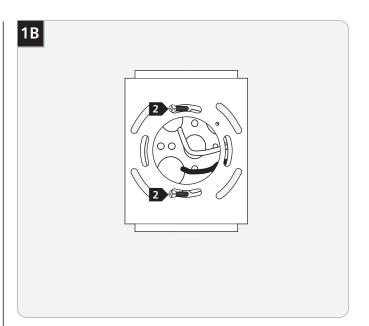

2 Screw the backplate to the electrical box.




- Connect the backplate wire to a suitable ground in accordance with local electrical codes.
- 4 Connect the white wire to the neutral power line.
- **5** Connect the black wire to the hot power line.




- 6 Hook the top of the fixture onto the backplate and place the fixture flush against the wall.
- 7 Tighten the screw at the bottom of the fixture.

Install the Lamp and Shade

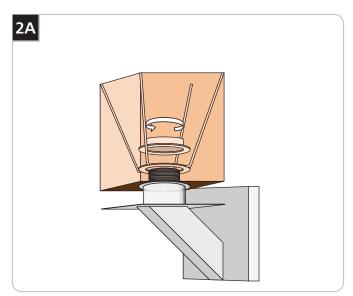

1 Place the shade support ring onto the socket and screw the retaining ring to the socket.



MAX 60 Watt type A19 medium base incandescent lamp.



2 Screw the lamp into the socket.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company