






Job Name:

Contact:

Fixture Type:

Part Number:

96" ENZIS KIT

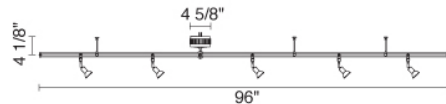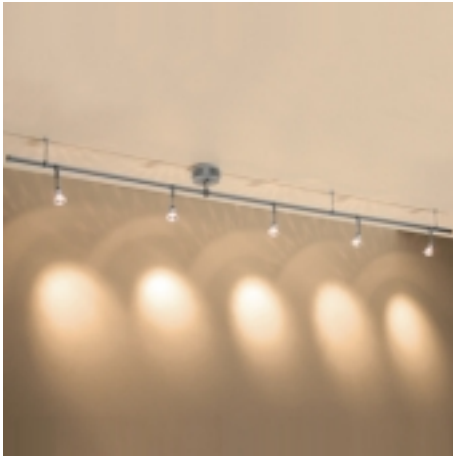

### Description:

The 96" Enzis Kit utilizes Bruck's light weight Enzis track system. Available in bronze and matte chrome. Two malleable aluminum rods in the flexible track hold the desired shape even when used with suspended cable supports. It is easily field bendable to achieve any radius or hard angle, eliminating the need for angle connectors or predetermined radius measurements.

It is attached using 3 supports and transformer with power feed. Fixtures are directionally adjustable and its location can be set as desired.

### Part Numbers:

**340096bz**

bronze, 5 Pira Spot fixtures

**340096mc**

matte chrome, 5 Pira Spot fixtures

**340098bz**

bronze, 5 Tikus fixtures

**340098mc**

matte chrome, 5 Tikus fixtures

### Technical Specs:

300VA transformer

120V AC, 50/60Hz input

11.7V AC output

250VA, 248W for 5 (maximum 50 Watt lamp)

Suitable for dry locations only

Mount to 3" - 4" round J-box

Short circuit protection

Overload protection

Thermal protection

Dimmable

Not compatible with LED fixtures

### Included:

Enzis 300W surface mount electronic transformer

Enzis end caps 2 pcs

Enzis 96" track

Enzis ceiling support 3 pcs

Enzis Pira Spot fixture 5 pcs/ or

Enzis Tikus fixture 5 pcs

50W MR16 36° lamps 5 pcs

### Note:

Minimal assembly is required