#### IVL669A 09/16

# **EASY CONNECT®** INSTALLATION INSTRUCTIONS

### **QUESTIONS OR CONCERNS CONTACT AT:**

1-800-265-1833 (English) / 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS **READ ALL INSTRUCTIONS** 


IMPORTANT SAFETY **INSTRUCTIONS** SAVE THESE INSTRUCTIONS

## **SAFETY PRECAUTIONS:**

- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
- 2. WIRING SUPPLIES AS REQUIRED BY LOCAL ELECTRICAL CODE.
- 3. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- 4. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.

NOTE: Product may not look exactly as shown in figures.

#### **INSTALLATION:**

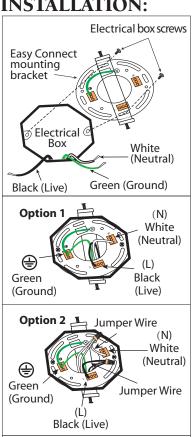


 $\mathbb{1}_{ extstyle \circ}$  Attach easy connect mounting bracket to electrical box with electrical box screws (not included).




**Option 2:** For multiple black (live) & white (neutral) wires joined in the electrical box (house wiring), attach a single "black" and "white" Jumper Wire before connecting. Strip 7mm from a 6" Jumper Wires (AWG 12-24) supplied. Then connect (push) wires into correct inserts.

**多。Connect (push) electrical** wires from fixture into correct inserts.



4。Attached fixture to mounting bracket by tightening the 2 screws.



- 5. Remove spinner nut and support bracket from socket. Position glass on lamp and secure with spinner nut and support bracket.
- 6. Install proper bulb type and wattage (not included).

(N)

White

(Neutral)

(L)

Black (Live)