



When removing the mirror from the box, please gently hold and lift from the outermost leaf ONLY.

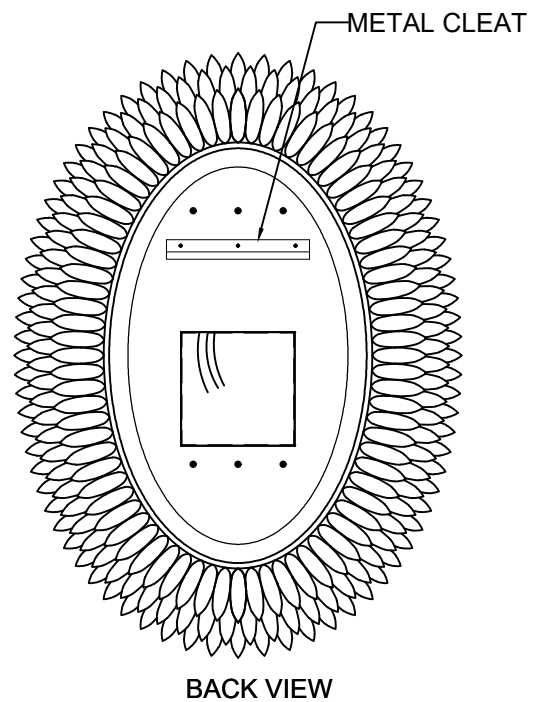

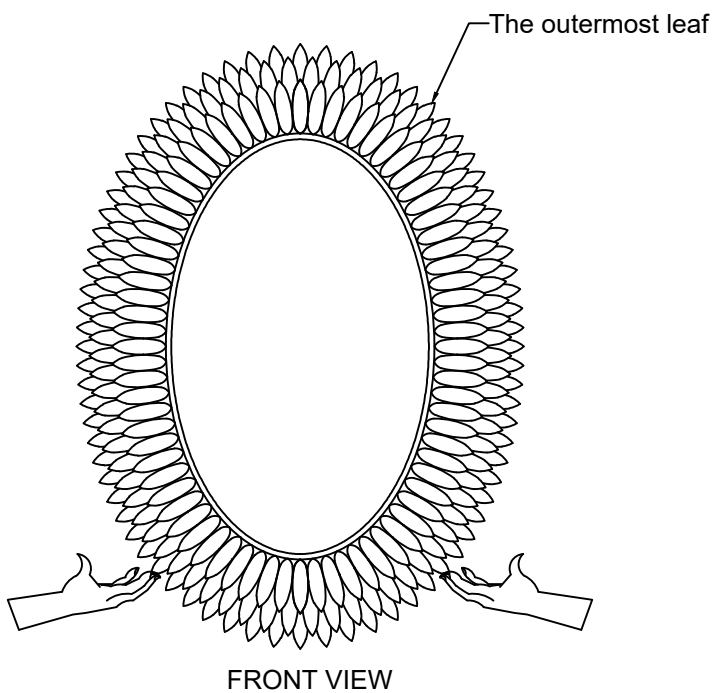

ITEMS INCLUDED (120VAC, 60Hz, max75W)

NECESSARY TOOLS (NOT INCLUDED)

Anchor(A): $\Phi 7.5 \times 36 \text{mm} \times 3$ Wall cleat: x1
Screws(B): 4x40mmx3




Installation must be carried out by a licensed electrician

- 1) For your safe, please switch off the main power supply and remove the appropriate circuit fuse before the installation. The installation instructions apply to square, circular, oval, etc.
- 2) The location should be mechanically sound enough to support the fixture;
- 3) Ensure the mounting surface is dry and allows the fitting to be safely connected to the main power supply.
- 4) If the location requires the provision of a new electrical supply, the supply must conform with the requirements of the related building regulations.
- 5) The top of the fixtures should be raised above the finished floor enough to accommodate the height of the user.
- 6) Using a spirit level as a guide, draw a pencil line on the mounting surface to mark the bottom edge of the fitting; locate and mark the position of the mounting screws on the mounting surface (mounting holes are provided in the chassis).
- 7) Wear suitable eye protection when drilling;
- 8) Use caution when drilling — take care when drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking up the fixing holes will help stop the drill from wandering.

	<p>Step 1</p> <p>Drilling the hole as the measurement</p>		<p>Step 2</p> <p>Insert anchors (A) into the wall</p>
	<p>Step 3</p> <p>Having a helper hold the fitting, secure the metal case to the wall using the screws (B) supplied.</p>		<p>Step 4</p> <p>Disconnected all wire before connection.</p> <p>Insert ground wire into the grounded connector</p> <p>insert the power wire into the black port of luminaire disconnector</p> <p>Insert the neutral wire into the white port of luminaire disconnector</p>
	<p>Step 5</p> <p>Install the frame on the metal cleat</p>		

INSTALLATION GUIDELINES

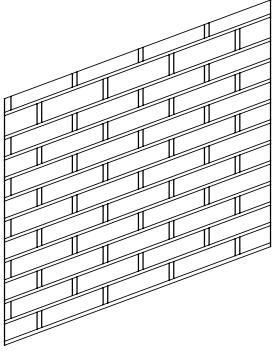

This product can be installed directly on a Cement wall. Any other installation method will void the product warranty and can lead to injuries.



SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

- Handle the glass with caution! Improperly handling the glass can cause it to break.
- You will need at least two people to install this unit properly.
- Distributor is not responsible for any damage to the unit or personal property caused by improper installation.
- Carefully remove product from packaging and keep packaging until installation is complete.
- Inspect all parts for damage; if there is damage to the unit prior to installation, please contact customer service .
- Install the product on a leveled surface.



Make sure that the electricity is turned off at the power source before proceeding with the installation.

IMPORTANT SAFETY INSTRUCTIONS

When using an electrical furnishing, basic precautions should always be followed, including the following:

Read all instructions before using this furnishing.

DANGER – To reduce the risk of electric shock

1. Always disconnect this furnishing from the electrical before cleaning.
2. If the product is broken, please turn off the power it and contact the supplier for maintenance.

WARNING – To reduce the risk of burns, fire, electric shock, or injury to persons:

- a. Close supervision is necessary when this furnishing is used by, or near, children, people with disabilities, or individuals requiring assistance.
- b. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.
- c. Never operate this furnishing if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped into water. Return the furnishing to a service center for examination and repair.
- d. Keep the cord away from heated surfaces.
- e. Never operate the furnishing with the air openings blocked.
- f. Never drop or insert any object into any opening.
- g. Do not use outdoors.
- h. **WARNING: Risk of Electric Shock –** Connect this furnishing to a properly grounded outlet only. See Grounding Instructions.
- i. Mount furnishings at the correct height.
- j. Suitable for Damp Location.

SAVE THIS INSTRUCTIONS

GROUNDING INSTRUCTIONS

This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.