

MACH 120°

Master Switch module


Mach 120 with a single

switch.

35/8

(NMS-1) controls a run of

Project _____ Fixture Type _____

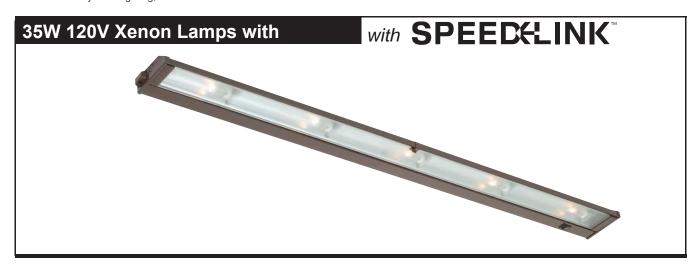

Dimensions	Lamps	White - WT	Bronze - BZ	Satin Aluminum - SA
40" 40"L x 3⁵⁄₅"W x 1½"H	5	NMA120L-40WT	NMA120L-40BZ	NMA120L-40SA
35W 120V Xenon Lamp	5	Lamp	120V: L-35	
no transformers		35W Xenon Type JCD, G-8 Base Clear, 270 lumen		
		Finish	WT-White, BZ- Bronze, SA-Satin Aluminum	

MACH 120® FEATURES

- Three power options Hardwire through knockouts, Interconnected with SpeedLink™ technology or Portable with cord and plug option
- 35W/120V Long-life Xenon lamps included
- Optional Master Switch allows single switch control of a run of . Mach 120 when a wall switch is not available
- 120V Long-life xenon lamps 20 Lamps with one power feed when linking.
- Fast easy installation furnished complete with mounting hardware
- · Internal connectors allow instant hardwiring without wire nuts
- . Knockouts on back for Romex, flex or rigid conduit - 1/2" MC connector included with each fixture
- · Extruded aluminum construction
- · Porcelain Sockets used for high temperature tolerance
- · Glass prismatic diffuser for maximum light distribution
- · Hinged glass door no tools required for relamping
- · Hi-Off-Lo switch, dimmable, energy saving
- · Multiple US patents pending

US C



11/8

SPEED&LINK