



## Installation manual for

1780D25C

Dimensions : D25"\*H15" L8

Collection : Emilia

Bulb Type : E12 (bulb not included)

Lamp Frame Weight : 6.6 LBS

Total Weight : 31 LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



1780D25C D25"\*H15" L8

### SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

### CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.


### Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions. where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

01

1780D25C D25"\*H15" L8

## Frame Assembly Diagram

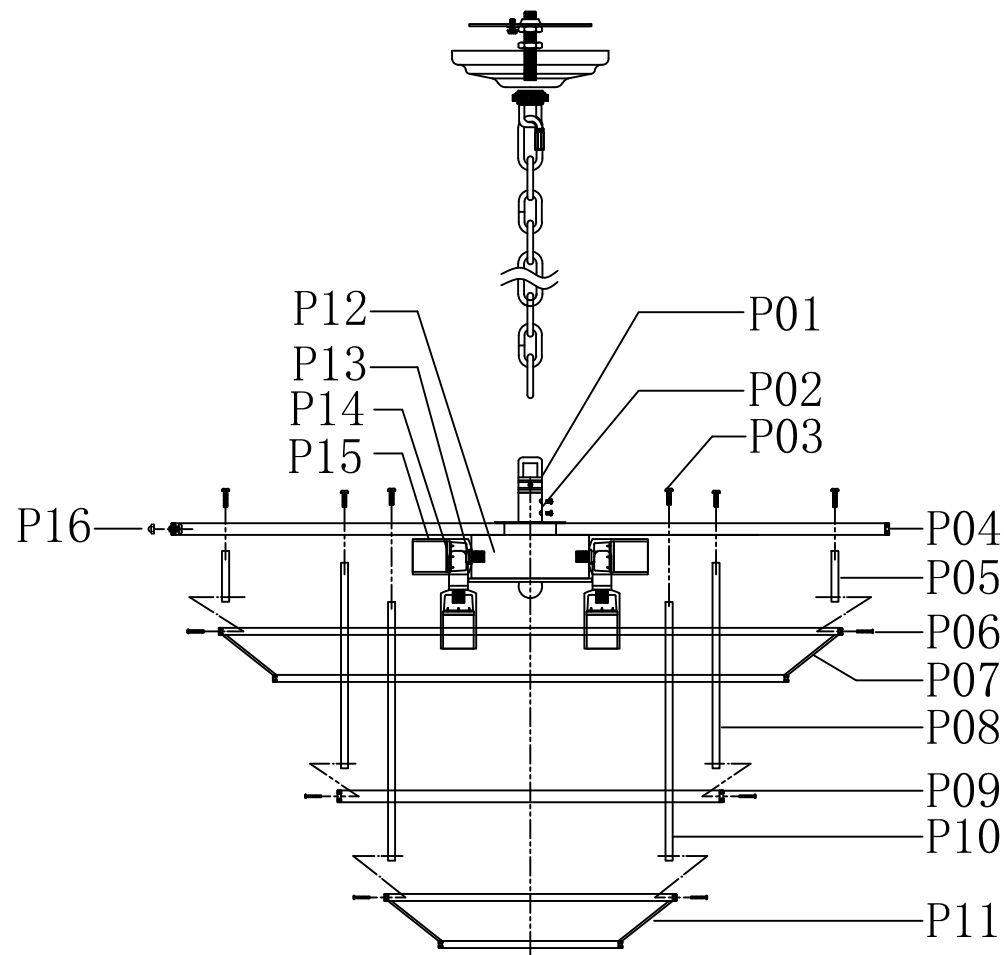

02












# 1780D25C D25"\*H15" L8

## Step 1













Please use the parts list to ensure you are not missing any parts.

1780D25





### PARTS LIST

Part	Picture	Description	Parts number	Qty	Check list
ZA		Canopy cover D5.3"*H1.2 (Canopy part)	CP10R53L3CH	1	
ZB		Crossbar 4" (Canopy part)		1	
ZC		Canopy ring (Canopy part)		1	
ZD		Canopy loop (Canopy part)		1	
ZE		L59"CHAIN04P Plain Design	CHAIN04PCH	1	
ZF		ground wire		1	
ZG		junction caps		2	
ZH		Power Cord 118"/SPT-1-18# Clear		1	
P01		Quick link	P-1780D25C-1	1	
P02		Coupling		1	
P03		M5*L0.98" screw		9	

# 1780D25C D25"\*H15" L8

Part	Picture	Description	Parts number	Qty	Check list
P04		D24"*H0.4" metal frame	P-1780D25C-1	1	
P05		L1.7" square pipe		3	
P06		M3*L0.47" screw		9	
P07		D20.6"*H0.24" metal frame		1	
P08		L6.9" square pipe		3	
P09		D13.2"*H0.4" metal frame		1	
P10		L8.7" square pipe		3	
P11		D9.8"*H0.24" metal frame		1	
P12		Metal Wire Box		1	
P13		Shake rod		4	
P14		E12 Socket		8	
P15		D1.2"*H2" lamp cup		8	


1780D25C D25"\*H15" L8

Part	Picture	Description	Parts number	Qty	Check list
P16		M4 screw & Screw cap	SCRC-CH	45	
A		Glass	GLASS1780A	45	
B		Crystal	CRY1780A	119	
C		plastic washer (for glass A)	R-R	45	

1780D25C D25"\*H15" L8

Step 2

Canopy Installation Instruction

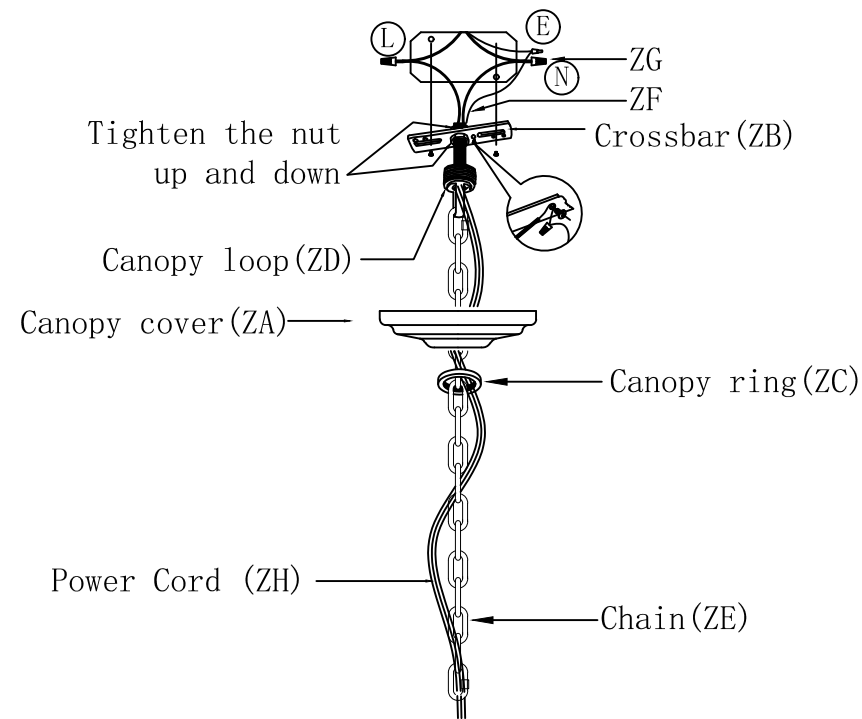

1780D25C D25"\*H15" L8

IMPORTANT: Test sockets with bulb before dressing the fixture.


- 1 . Attach the crossbar to the electrical box.
- 2 . Pass the lamp wire and ground wire through the loop, canopy ring and center hole of canopy cover.
- 3 . Screw 2.5" threaded pipe into the crossbar and fasten with hex-nut.
- 4 . Pull wires up through the nipple.
- 5 . Screw loop only onto threaded pipe.
- 6 . Hang the fixture on chain.
- 7 . Make the electrical connections as detailed in the drawing above.
- 8 . Secure the canopy cover with threaded canopy ring .

07

1780D25C D25"\*H15" L8

Step 3

### Frame Assembly Diagram

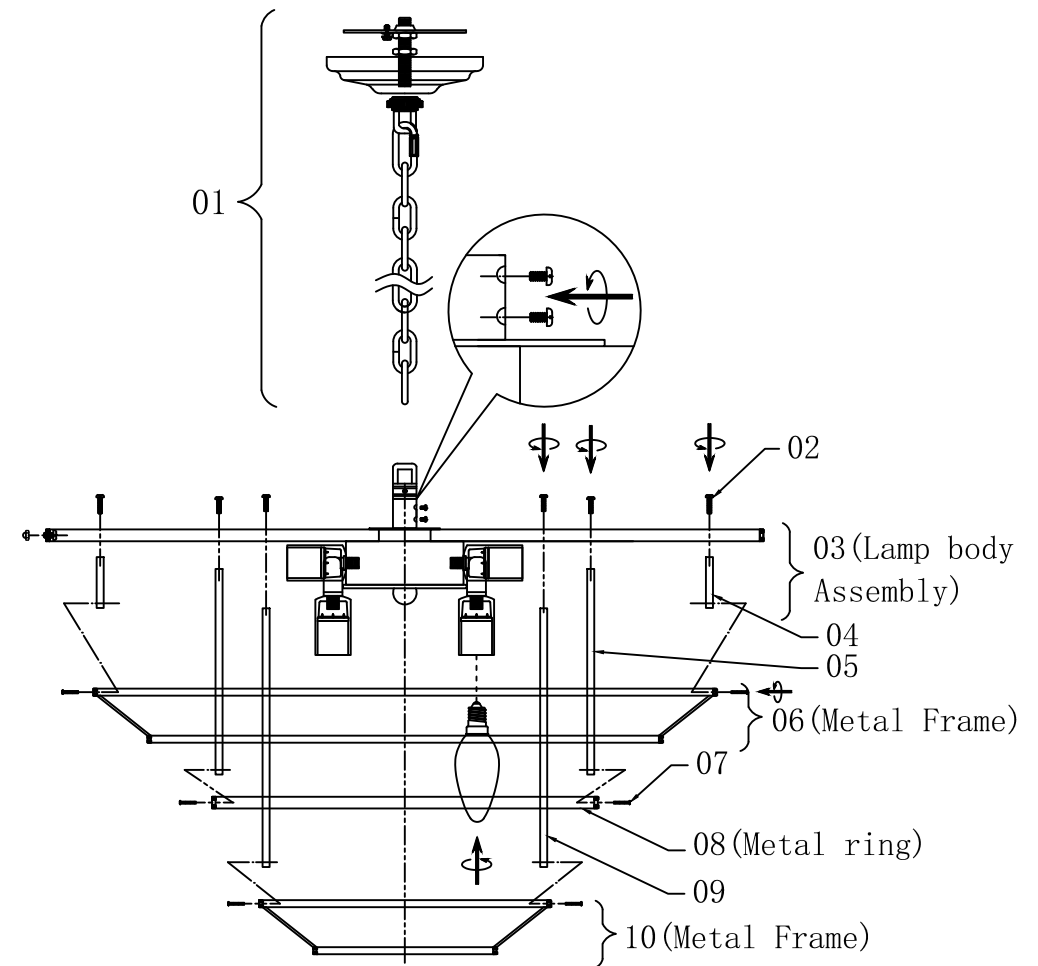

08

1780D25C D25"\*H15" L8

## Frame Assembly Instructions

### Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Connect the canopy parts(01) to the lamp body assembly(03).
2. Connect the square pipe(04) (05) (09)to the metal ring(08)、metal frame(06) (10)and the lamp body assembly(03) by screws(02) (07).
2. Hang the canopy parts (01) on the Ceiling Plate.
3. Screw the Bulb on the Lamp Holder. (bulb not included)

09


1780D25C D25"\*H15" L8

### Step 4

## Crystal Dressing Diagram



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

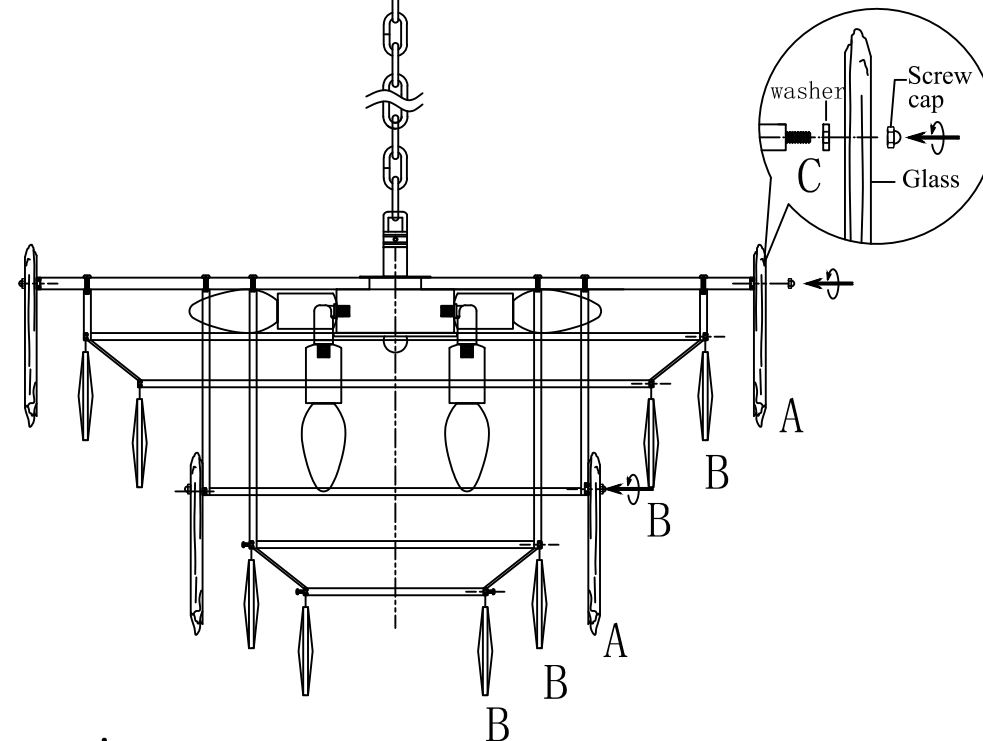

### Attention:

Install light bulb first before assembling crystal and glass. Please do not over-tighten!

Hand tighten glass screw only! Do not use power tools.

1. Hanging the plastic washer(C)and glass (A) on the lamp by Screw cap,As shown in the figure.
2. Hanging the crystal (B) on the lamp.

10

1780D25C D25"\*H15" L8

## **Congratulations !**

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

1780D25C D25"\*H15" L8

### **Cleaning and Maintenance of Chandelier Frame**

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

### **Cleaning and Maintenance of Crystals**

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

### **To Order Crystal Replacement Parts**

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior to shipment. All orders must be pre-paid.

1780D25C D25"\*H15" L8

### Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.

A written return authorization form will be sent to you with specific instructions.

1780D25C D25"\*H15" L8

### Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.