

# ELEGANT

FURNITURE & LIGHTING™


Collection: Carlisle

Installation manual for:

OD325P22BK L9" W9" H22" L3

## Installation instructions:

1. Install tube (P10) on lamp holder
2. Install E12\*3 light source. (Bulbs not supplied).
3. Put glass (P20) into body (P9) and stick sponge on clips (P8). Finally curve clips to fix glass.
4. Connect cover (P7) with body (P9) and put rubber ring (P4) with screw caps (P3) to fixable.
5. Black wire from ceiling (junction box) attaches to "L" wire from the fixture
6. White wire from ceiling (junction box) attaches to "N" wire from the fixture
7. "E" wire from the ceiling attaches to "E" wire from the fixture.
8. Use explosion screw (P1) to fix base (P2) into land
9. Put lamp pole (P16) into base (P2) and use screw (P17) to lock in.

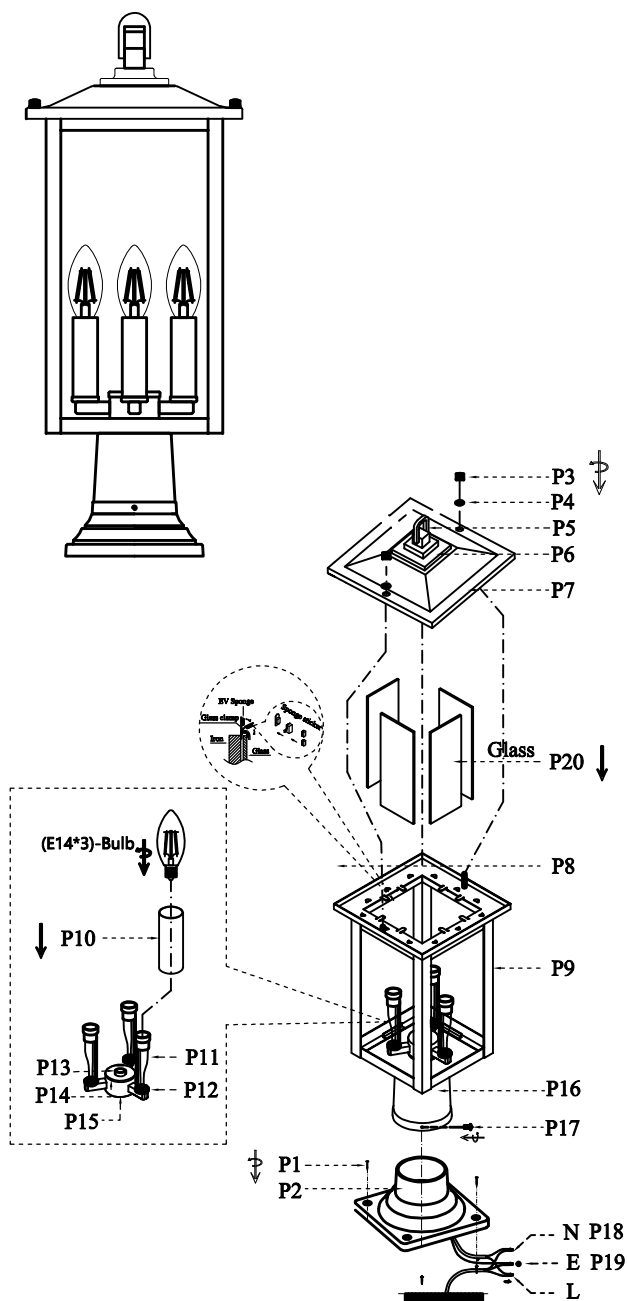

"L" = Hot wire  
"N" = Neutral wire  
"E" = Ground wire

| Part Number    | Part | Picture | Description                 | Qty |
|----------------|------|---------|-----------------------------|-----|
| LB12P01        | P1   |         | Explosion screw M4          | 4   |
|                | P2   |         | 5.5*2.95" Lamp base         | 1   |
| P-OD325P22BK-1 | P3   |         | Screw cap                   | 2   |
|                | P4   |         | Rubber ring                 | 2   |
|                | P5   |         | 32*50MM Ring                | 1   |
|                | P6   |         | 70*70*18MM Cap              | 1   |
|                | P7   |         | 220*220*33MM Cover          | 1   |
|                | P8   |         | EV Sponge<br>Sponge sticker | 12  |
|                | P9   |         | 212*212*328MM Body          | 1   |
|                | P10  |         | Ø22*H90MM Tube              | 3   |
|                | P11  |         | E12 Holder                  | 3   |
|                | P12  |         | Ø23*5MM Cover               | 3   |
|                | P13  |         | Ø16*5MM Column parts        | 1   |
|                | P14  |         | Ø52*5MM Cover               | 1   |
|                | P15  |         | L108*W94*H30MM Y-Box        | 1   |
|                | P16  |         | lamp pole (3.38*3.22")      | 1   |
|                | P17  |         | Screws M4                   | 3   |
|                | P18  |         | UL18#, L11.8" Black+White   | 1   |
|                | P19  |         | UL18# Ground wire, L9.8"    | 1   |
| GP12L6         | P20  |         | L317*W167MM Glass           | 4   |