


Collection: Mascher
Installation manual for:

OD336H11BK L5" W5" H10.5" L1

Installation instructions:

1. Install E26 light source. (Bulbs not supplied)
2. Connect cover (P13) with body (P15) and put rubber ring (P12) and screw caps (P11) to fixable.
3. Use hook (P10) connect (P13). Twist off screw and mat from the hanging ring (P8) and across the middle hole of canopy (P5) and use screw and mat lock in again.
4. Black wire from ceiling (junction box) attaches to "L" wire from the fixture
5. White wire from ceiling (junction box) attaches to "N" wire from the fixture
6. "E" wire from the ceiling attaches to "E" wire from the fixture.
7. Screw (P2) through to canopy hole (P5) and then put rubber ring (P6) and twist screw cap (P7) to fix mounting bracket (P3)

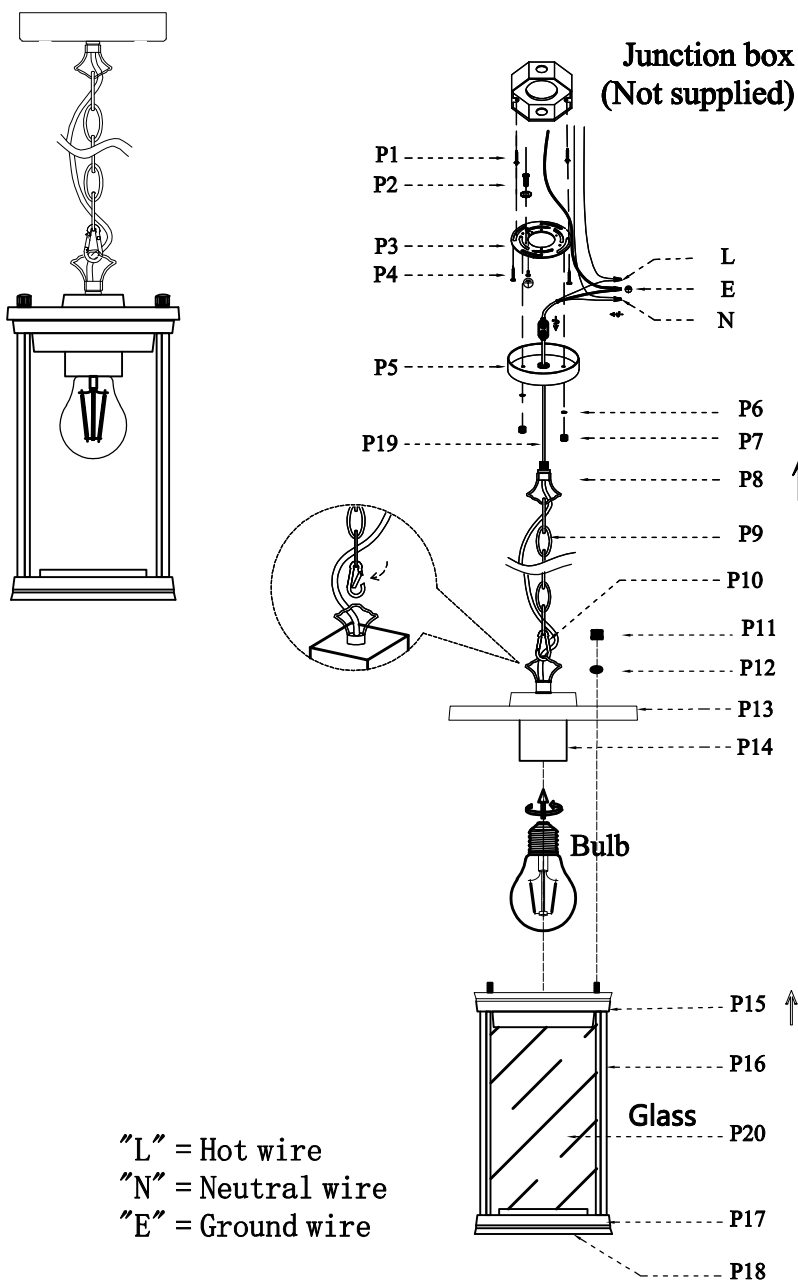

Part Number	Picture	Description	Qty
CP12H01BK	P1	Explosion screw	2
	P2	Screws M4	2
	P3	Mounting bracket $\varnothing 3.94$	1
	P4	Screws M4	2
	P5	Canopy ($\varnothing 4.7'' \times 0.78''$)	1
	P6	Rubber ring	2
	P7	Screw cap	2
Chain04PBK	P8	Hanging rings L1.57''*W0.59''*H1.57''	1
	P9	Chain (L39'')	1
	P10	Hook (L1.57''*W0.78''*H0.15'')	1
P-OD336H11BK-1	P11	Screw cap	2
	P12	Rubber ring	2
	P13	127*127*17MM Cover	1
	P14	E26 Lamp Holder	1
	P15	122*122*H30MM Body edge	1
	P16	12*10*H181MM Body	4
	P17	122*122*H22MM body bottom	1
	P18	117*117MM Plate	1
Cord-59-18#-BK	P19	UL18#,L59"Black	1
GP12L22	P20	L98*H181MM Glass	1