


Contemporary Lighting

PRODUCT NAME: Fizz 5-Light Pendant
ITEM NUMBER: E22764-89

Please consult your electrician for hanging fixture and wiring

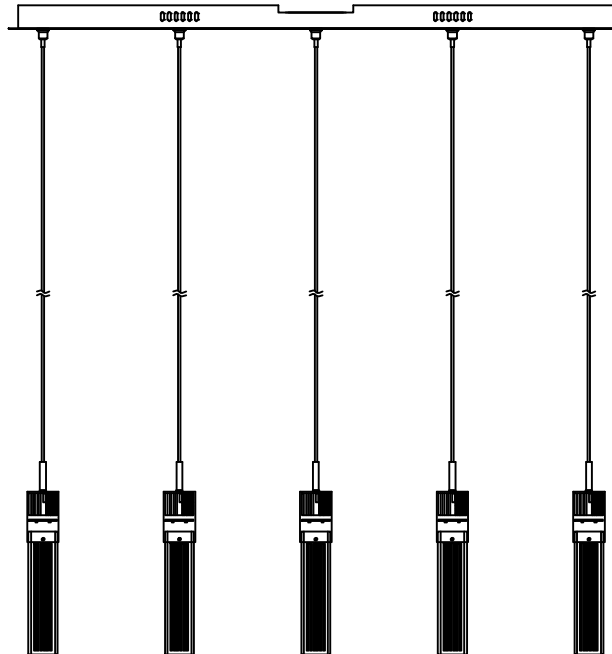

The fixture is designed to work with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M

Lutron DVL-153P

Lutron SCL-153P

Leviton IPL06-10Z

Leviton 6674-POW

Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.


WARNING: Wires need to be connected to driver found in canopy and should not connect directly to power source or a short might occur.

**PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE**



MADE IN CHINA

Page 1 of (2)

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation

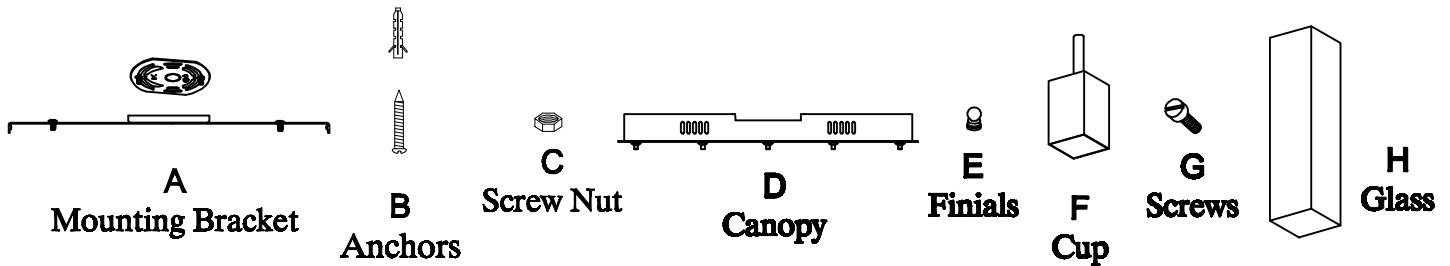


Locate all hardware & components before discarding packaging

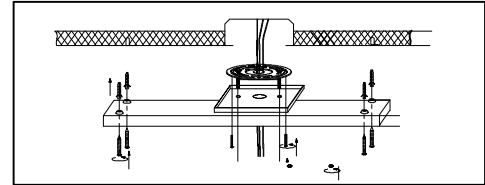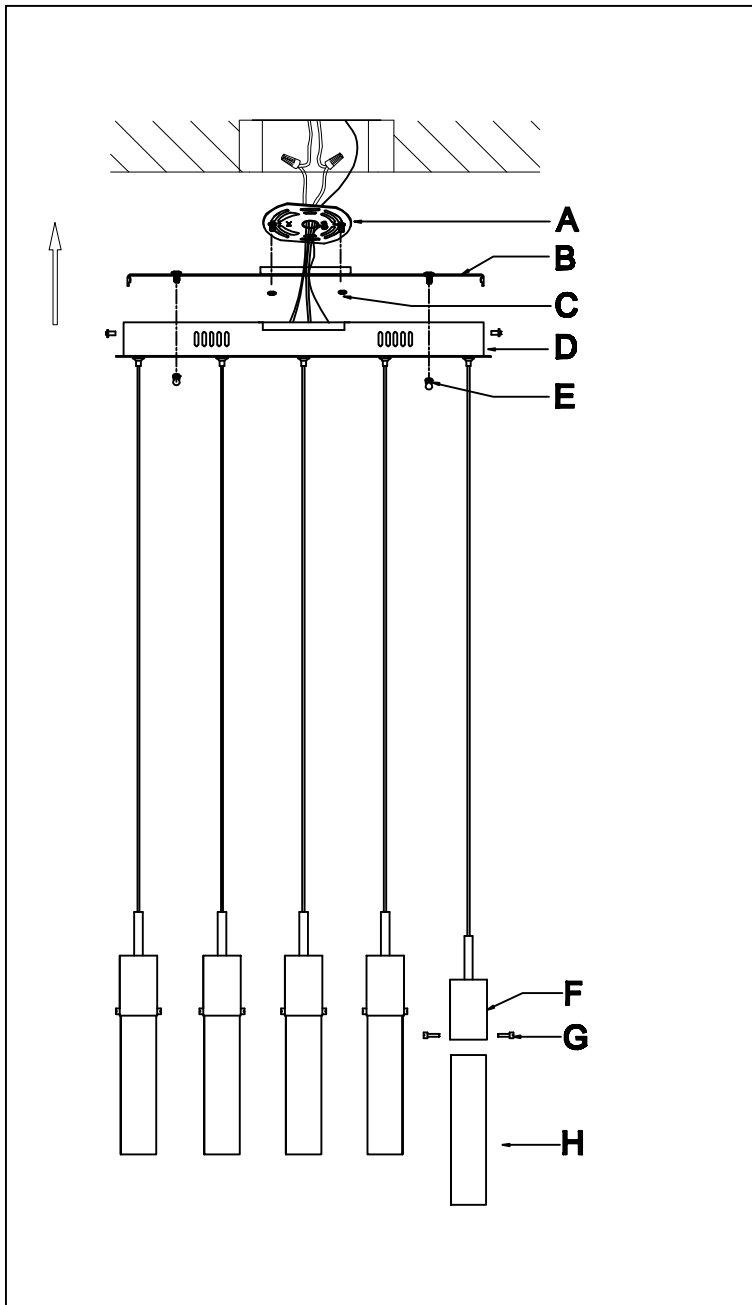


1.)

Step 1: Remove mounting bracket from fixture and install to electrical box using screws (D). Mark where anchors at ends of bracket (A) meet the ceiling. Remove mounting bracket (A) from ceiling. Drill holes using 3/16" ± drill bit where marked. Install mounting bracket (A) to outlet box by attaching anchors (B), and screw nuts (C) to secure bracket at ends.

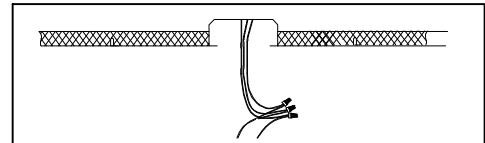


2.)

Step 2: Wire fixture to wires in outlet box. Copper wire is for Ground.

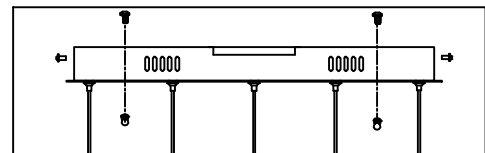

3.)

Step 3: Adjust wire length to desired mounting height, and tighten strain relief screws to secure. Install canopy (D) to bracket using finials (E) on the bottom of the canopy and screws at ends to secure.

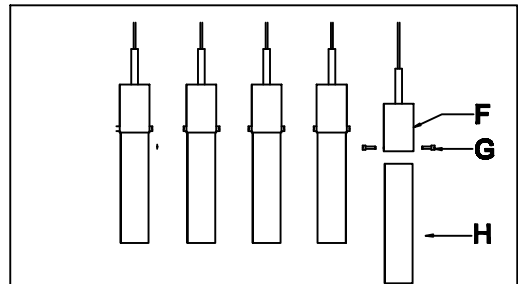

4.)

Step 4: Insert glass (H) into cup (F) and secure using two screws (G) provided.

Cleaning & Care:

Clean with soft cloth and a mild detergent.
 Do not use abrasive cleaner.