

# Bakersville Outdoor Post

82938, 82941 | 1.0

## GENERATION LIGHTING POST

**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

[www.generationlighting.com](http://www.generationlighting.com)


© 2020 Generation Lighting. All rights reserved.  
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

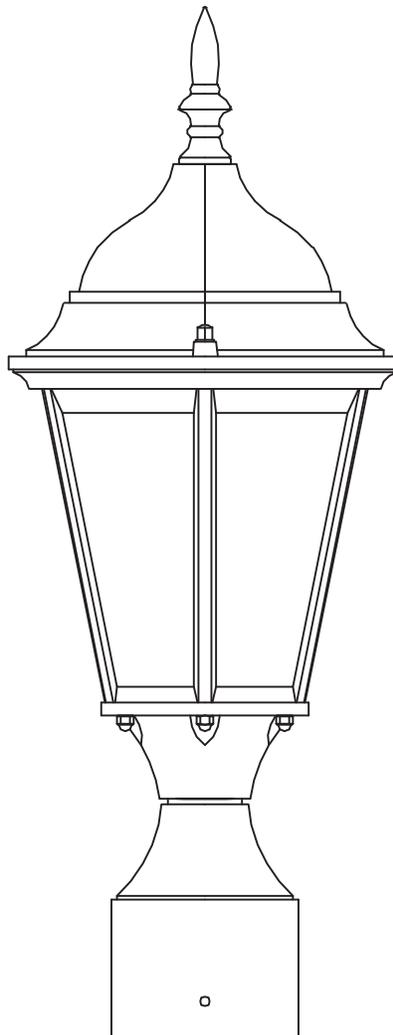

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

IA

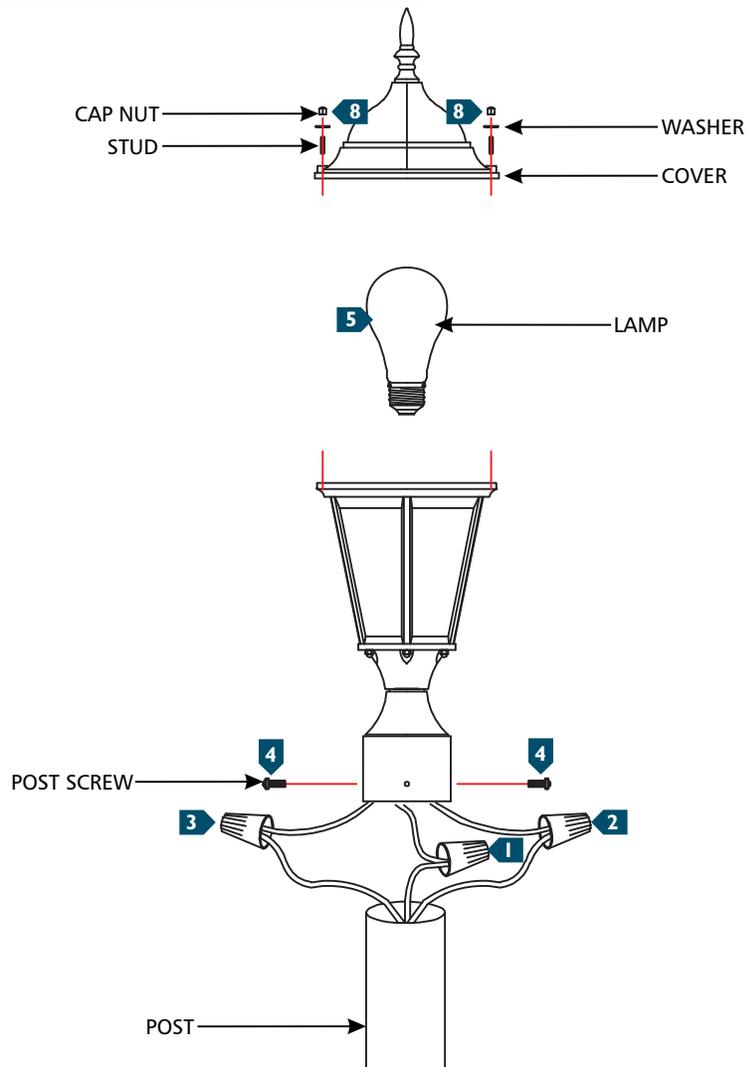

- 1 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 2 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 3 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 4 Neatly tuck in any wiring and secure the fixture to the post with post screws.
- 5 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 6 Screw the studs into the fixture.
- 7 Align the cover with the studs and place it onto the fixture
- 8 Place a washer onto each stud, then secure it in place by screwing the cap nuts onto the studs.