Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

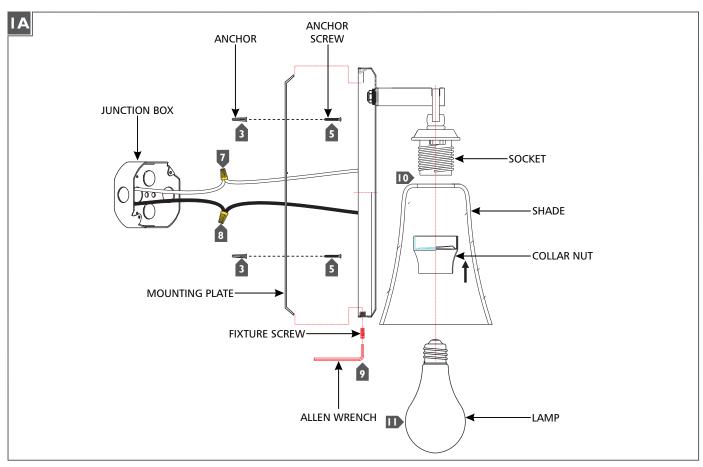

- Models VS23701 and VS24701 Only: Temporarily install the mounting plate to the junction box.
- 2 Models VS23701 and VS24701 Only: Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3 Models VS23701 and VS24701 Only: Drill appropriate size holes at the marked locations and install the anchors.
- 4 Secure the mounting plate to the junction box.
- Models VS23701 and VS24701 Only: Screw the anchor screws into the anchors.
- 6 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire to the hot power line wire with a wire nut.
- 9 Mount the fixture base onto the top of the mounting plate, then swing the fixture base down flush against the wall and secure it with the fixture screw.
- Place the shade onto the socket and secure it in place by screwing the collar nut onto the socket. NOTE: Models VS23701 and VS24701 Only, hold the glass with one hand to prevent it from scratching the back plate and tighten the collar nut with the other hand.
- II Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.

SAVETHESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com

© 2019 Generation Lighting All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.