




Family: Marcellina | Item No. 4406 GR



## Drawing 1 - Fixture Assembly



## Drawing 2 - Fixture Assembly

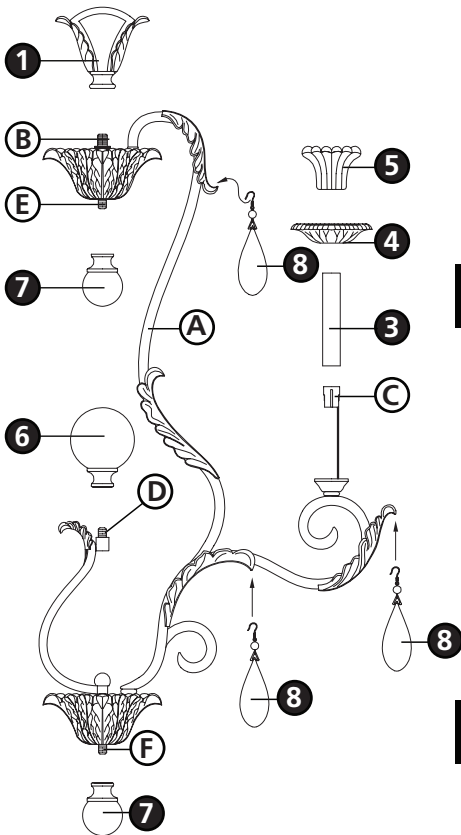

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first rotating the fixture arms into the correct position, assembling the basic fixture, installing the mounting hardware, making all necessary electrical connections, mounting the fixture to the ceiling and then hanging the crystals.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. To assemble fixture, slip loop (1) along wire and thread onto threaded tube (B) at the top of fixture - see **Drawing 2**.
2. Rotate arms (A) until they are equally spaced 60 degrees apart - see **Drawing 1**.
3. Slip candle sleeve (3) over each socket (C) - see **Drawing 2**.
4. Slip glass bobesche (4) over candle sleeve (3).
5. Slip glass cup (5) over each candle sleeve (3).
6. Thread large crystal ball (6) onto threaded tube (D), located in the center of the fixture.
7. Thread one of the small crystal balls (7) onto threaded tube (E).
8. Fixture can now be lamped accordingly.
9. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. To attach crystals, thread the remaining small crystal ball (7) onto threaded tube (F) at the bottom of the fixture - see **Drawing 2**.
2. Hang crystals (8) from areas indicated.

Note: Maximum wattage for 4406 fixture is 60 watts per bulb.

12.10.08