

# 9001 (Convertible Lamps for Pendant)

## INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

### CAUTION

**WARNING:** Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

### GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

### ASSEMBLY AND INSTALLATION

1. Connect the stems (14) (13)(12) (depending on desired height). Attach them to the all thread on the top of the fixture (15), then thread the stem into the swivel (11).
2. Loosen **mounting screw (10)** to remove mounting plate (6) from canopy(9).
3. Attach the mounting plate (6) with **box screw (8)** to the outlet box (1).
4. Pull out the outlet wire and ground wire from the outlet box(1).  
Make wire connections with wire nut (5).  
-Ribbed wire (w/o marking) or white wire from light to White wire (3) from power source.  
-Smooth wire (w/ marking) or black wire from light to Black wire (2) from power source.  
-Tie the ground wire(4) from fixture and from outlet box(1) to the ground screw(7) on the mounting plate(6).
5. Attach the fixture canopy(9) to the outlet box (1), secure it with **mounting screw (10)**.
6. Install bulbs: (bulbs not included).  
(Do **NOT** exceed the maximum **wattage** recommended on the socket (16)).

INSTALLATION IS NOW COMPLETED

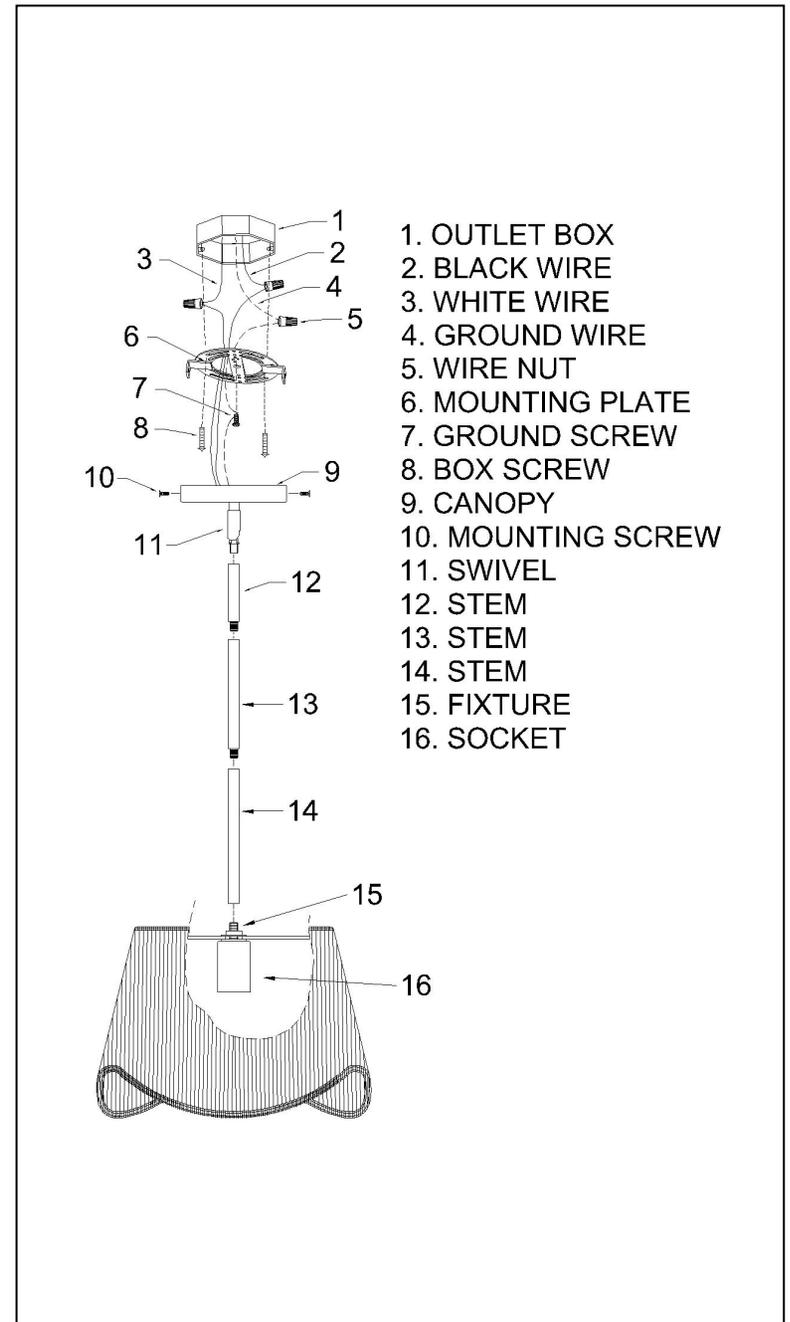

# 9001 (Convertible Lamps for Semi Flush Mount)

## INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

### CAUTION

**WARNING:** Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

### ASSEMBLY AND INSTALLATION

1. Connect the stem(12) (depending on desired height). Attach them to the all thread on the top of the fixture (13), then thread the stem into the swivel (11).
2. Loosen mounting screw(10) to remove mounting plate (6) from canopy(9).
3. Attach the mounting plate (6) with **box screw (8)** to the outlet box (1).
4. Pull out the outlet wire and ground wire from the outlet box(1).  
Make wire connections with wire nut (5).  
-Ribbed wire (w/o marking) or white wire from light to White wire (3) from power source.  
-Smooth wire (w/ marking) or black wire from light to Black wire (2) from power source.  
-Tie the ground wire(4) from fixture and from outlet box(1) to the ground screw(7) on the mounting plate(6).
5. Attach the fixture canopy(9) to the outlet box (1), secure it with mounting screw (10).
6. Install bulbs: (bulbs not included).  
(Don't exceed the maximum **wattage** recommended on the socket (14)).

INSTALLATION IS NOW COMPLETED

