


# E12, E18, E24, E36, E48, E60, and E72

|              |  |      |
|--------------|--|------|
| Catalog #:   |  | Type |
| Project:     |  | Date |
| Prepared by: |  |      |

## Downrods

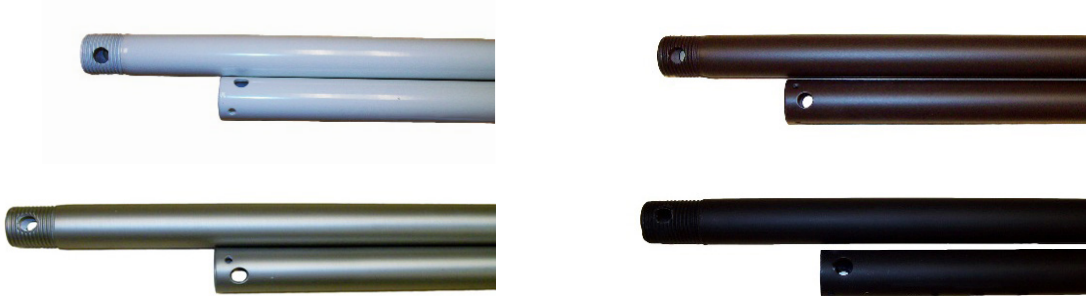

### DESCRIPTION

1/2" Diameter decorative downrods are available in a variety of sizes and finishes. For best performance and appearance, use an extension downrod with your ceiling fan when installing on a sloped ceiling. It is recommended that there is at least 7' of clearance under your ceiling fan blades - the standard 4" downrod should work in most 8' ceiling installations. 1/2" down rod connector joins two down rods together for extended lengths, do not exceed 144" [two 72" downrods connected together is the maximum length recommended]

### DESIGN FEATURES

- 12", 18", 24", 36", 48", 60", and 72"
- 1/2" Diameter decorative downrod; NOT for use with 1080W or 1088 fan
- Downrod Connector (DC) - For extra high ceilings; this coupler allows multiple downrods to be connected together - do not exceed 144"; NOT for use with ER downrods



|                        |     | Ceiling Height ( in feet) |     |     |     |     |     |     |
|------------------------|-----|---------------------------|-----|-----|-----|-----|-----|-----|
|                        |     | 9'                        | 10' | 11' | 12' | 13' | 14' | 15' |
| Downrod Item# / Length | 12" | E12                       |     |     |     |     |     |     |
|                        | 18" |                           | E18 |     |     |     |     |     |
|                        | 24" |                           |     | E24 |     |     |     |     |
|                        | 36" |                           |     |     | E36 |     |     |     |
|                        | 48" |                           |     |     |     | E48 |     |     |
|                        | 60" |                           |     |     |     |     | E60 |     |
|                        | 72" |                           |     |     |     |     |     | E72 |

### ORDERING GUIDE

Example: E12WW

| Model #   | Finish                  |
|-----------|-------------------------|
| E12 : 12" | WW : White              |
| E18 : 18" | BK : Black              |
| E24 : 24" | MBK : Matte Black       |
| E36 : 36" | BN : Brushed Nickel Oil |
| E48 : 48" | OB : Rubbed Bronze      |
| E60 : 60" |                         |
| E72 : 72" |                         |

