


# Sopra Ceiling

700FMSPR

1.0

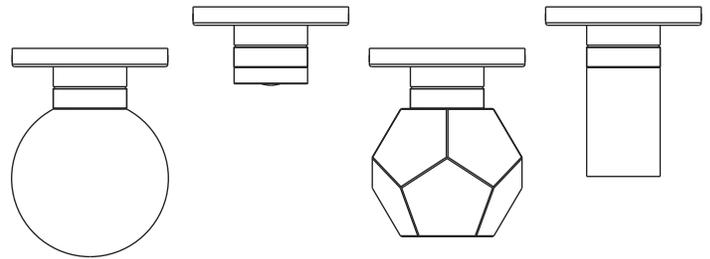

## GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for damp locations.

This product may be dimmed with a low-voltage electronic dimmer.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

## Install the Fixture

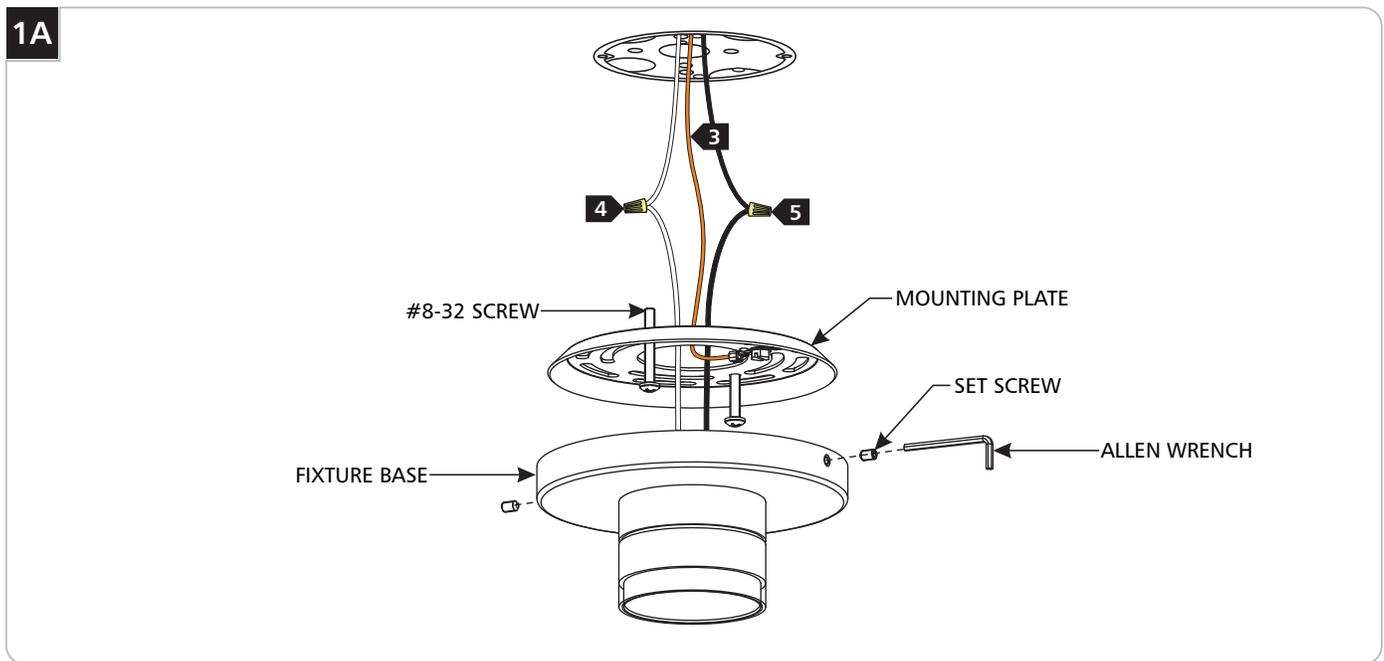

- 1** Remove the mounting plate from the fixture base by loosening (**not removing**) the set screws around the fixture base using the provided Allen wrench.
- 2** Install the mounting plate to the junction box with the two #8-32 screws provided.
- 3** Connect the mounting plate ground wire to a suitable ground in accordance with local electrical codes.
- 4** Connect the white fixture wire to the neutral power line.
- 5** Connect the black fixture wire to the hot power line.
- 6** Properly place all wires and wire nut connections into the junction box, place the fixture base onto the mounting plate, and secure it in place by re-tightening the set screws (reversal of step 1A).

**SAVE THESE INSTRUCTIONS!**



7400 Linder Ave, Skokie, IL 60077  
847.410.4400

[www.techlighting.com](http://www.techlighting.com)

© 2018 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company