
STYLE NO:22445


Parts and Hardware List

A.	Sconce Assembly	1PC
В.	Square bead and Crystal ball	1PCS
C.	Mounting Strap	1PC
D.	Mounting Studs	4PCS
E.	Wire connectors	2PCS
F.	Cap Nuts	2PCS
G.	Mounting Hex-Nut	2PCS
H.	Green Ground Screw	1PC
1.	Glass sticks	12PCS
J.	Square bead	6PCS
K.	Square bead and Crystal ball (long)	6PCS
L.	Square bead and Crystal ball (short)	12PCS

Please make sure that you have all the parts indicated before you begin assembly of this item

Please read Wiring Instructions before you begin assembling and installing your Chandelier

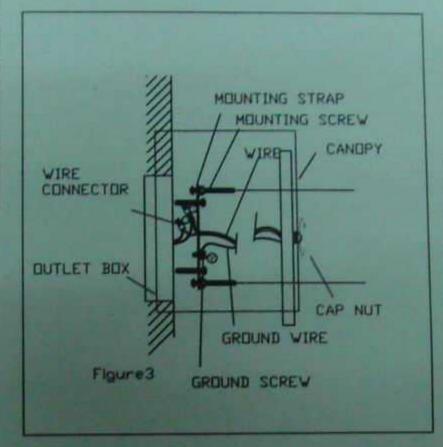




CLEANING: This item has a lacquered and baked finish.

When cleaning only use a soft ,dry cloth .Do not use

liquid abrasives as they may discolor the finish.



Assembly Instructions

1. Carefully remove the parts and hardware from the carton.

2. Fasten the mounting strap to the outlet box by using two screws supplied with the outlet box .(See Figure 3)

3. Install the ground wire in the mounting strap with the green ground screw supplied.

4. Place the white ,ribbed or tinted wire evenly against the white wire from the outlet box and place the black,smooth or un-tinted wire evenly against the black wire from the outlet box. (Connecting the Wire-See Figure 2)

5. After the wires are connected ,tuck them carefully inside the outlet box. Place Canopy over the outlet box and secure with Cap Nuts.

6. Install 60 Watt, Type B bulbs (sold separately) into the sockets of the fixture.

7. Hang the Glass sticks and crystal beads from inside to outside in turn of I to L , Crystal J and K are hang in the same metal ring one by one.

8. Hang the Crystal B to the lamp arm .

Notice:

Please hang the crystal ball to the end of crystal strand when it droped out of the strand. If the fixture hanging crystal can't be on a level, please note the three weights on the frame in the tube are moveable, they are used to balance and make the fixture hang level.