Wellfleet | Arm Wall

CW1121, CW1131, CW1141 1.0

GENERATION LIGHTING

WALL

0

0

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


 (Φ)

SAVE THESE INSTRUCTIONS!

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

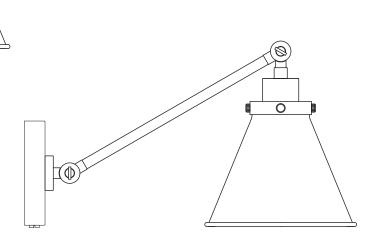


GENERATION LIGHTING 7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.generationlighting.com

©2021 Visual Comfort & Co., L.L.C. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification.

VISUAL COMFORT & CO.

Install the Fixture

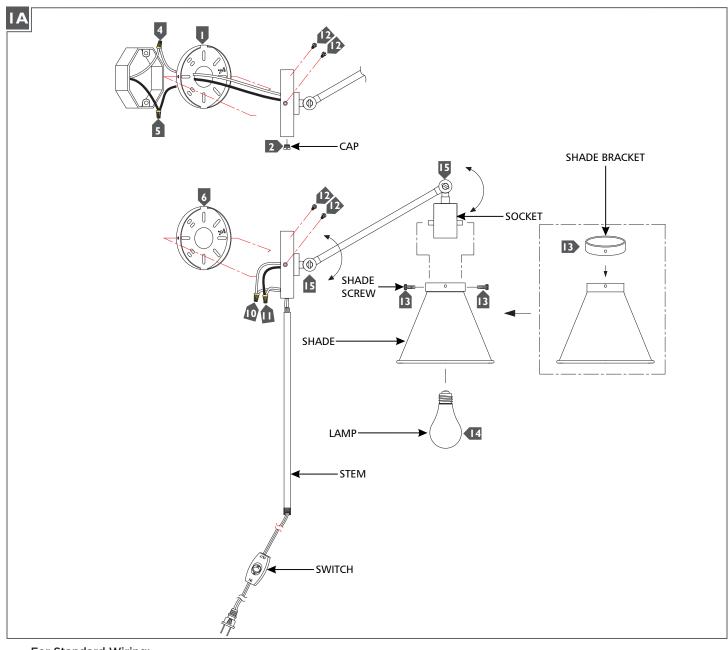

- **For Standard Wiring:** Secure the mounting plate to the junction box.
- 2 Screw the cap into the hole in the bottom of the backplate.
- 3 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 4 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.

6 For Plug-in: Secure the mounting plate to the wall.

- 7 Feed the cord though the stem and through the hole in the bottom of the backplate.
- 8 Screw the stem into the bottom of the backplate.
- 9 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire to the neutral cord wire (square and/or rigid) with a wire nut.
- Connect the black fixture wire to the hot cord wire (round and/or smooth) with a wire nut.
- For Both: Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate/fixture bracket, and secure it in place using the fixture screws.
- Is Install the shade by aligning the holes on the shade with the holes on the bracket and the socket, then secure in place using the shade screws.
- Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- IS Adjust the fixture arm as needed.