

## ASSEMBLY INSTRUCTIONS

### Talia 56" Chandelier

Item # JN5123


#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

#### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Measuring Tape	Wire Cutters
Wire Strippers		

- Carefully remove all parts from the box. Place on a clean, soft surface.
- It is recommended to install a 1/4 IPS (1/2" dia) threaded pipe, secured to a structural member of the building. Then install threaded receiver **(A)** on top of fixture to threaded pipe and tighten with wrench.  
**NOTE:** Item must be supported independent of the junction box due to hanging weight.
- Remove collar loop **(B)** from chain **(F)** and secure to threaded receiver attached to structural member by tightening locknut.
- Install canopy **(D)** to collar loop **(B)** and secure with collar ring **(E)**.
- Determine desired overall length, and amount of chain **(F)** needed. Shorten chain using chain pliers. (Keep extra chain)
- Attach chain **(F)** to collar loop **(B)** and fixture loop **(G)** using quick links **(I)**. Then secure quick links **(I)** by securing metal part **(M)** to quick links **(I)** using screws **(N)** (see diagram 1).
- Thread fixture wire and ground wire through chain **(F)**.  
**NOTE:** When you reach the collar loop **(B)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
- Separate two sides of molded wire, and strip insulation on each 5/8".
- Loosen collar ring **(E)** and let canopy **(D)** slip down chain **(F)** carefully.

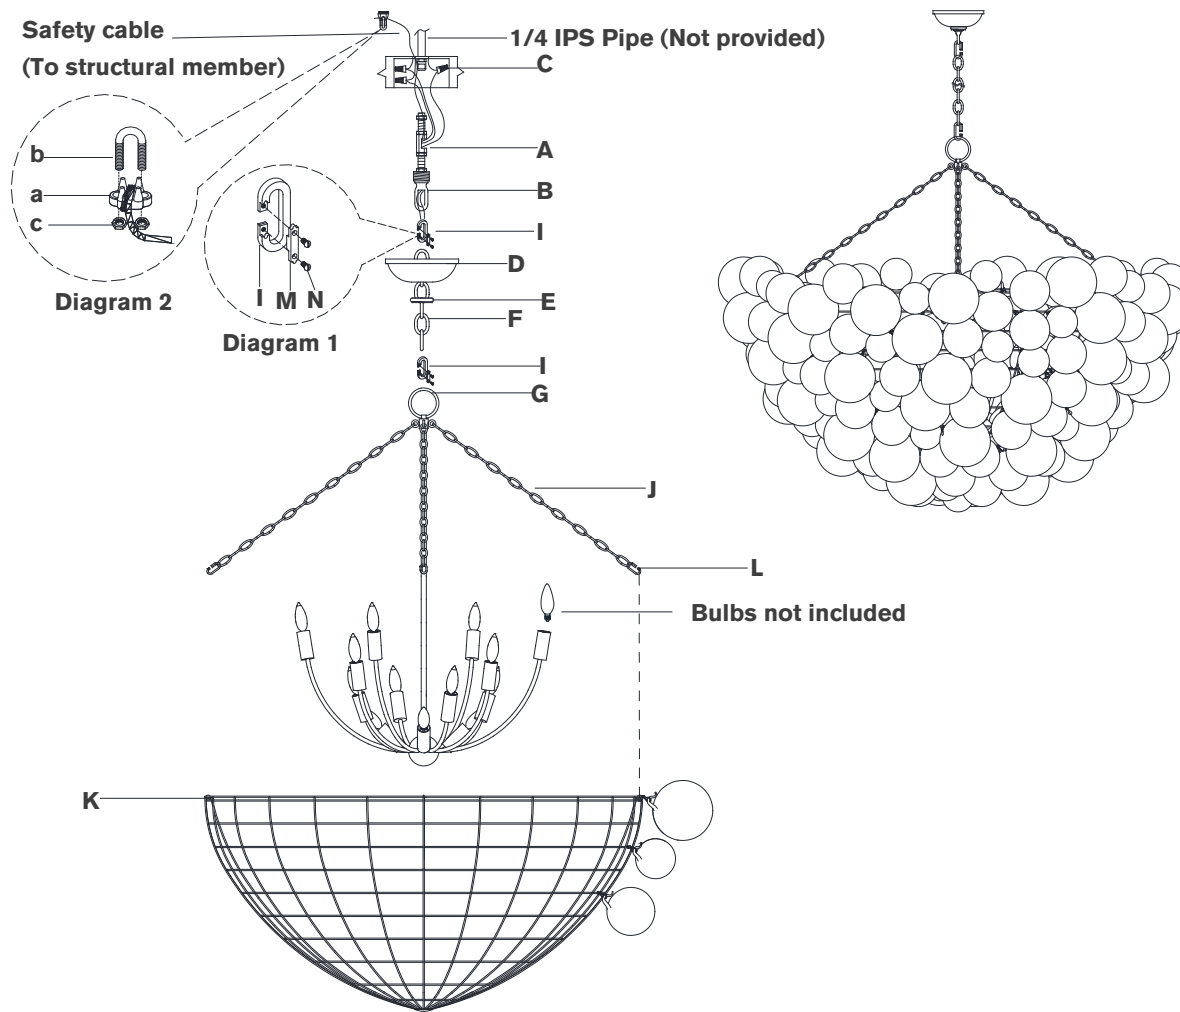


## ASSEMBLY INSTRUCTIONS

### Talia 56" Chandelier

Item # JN5123

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

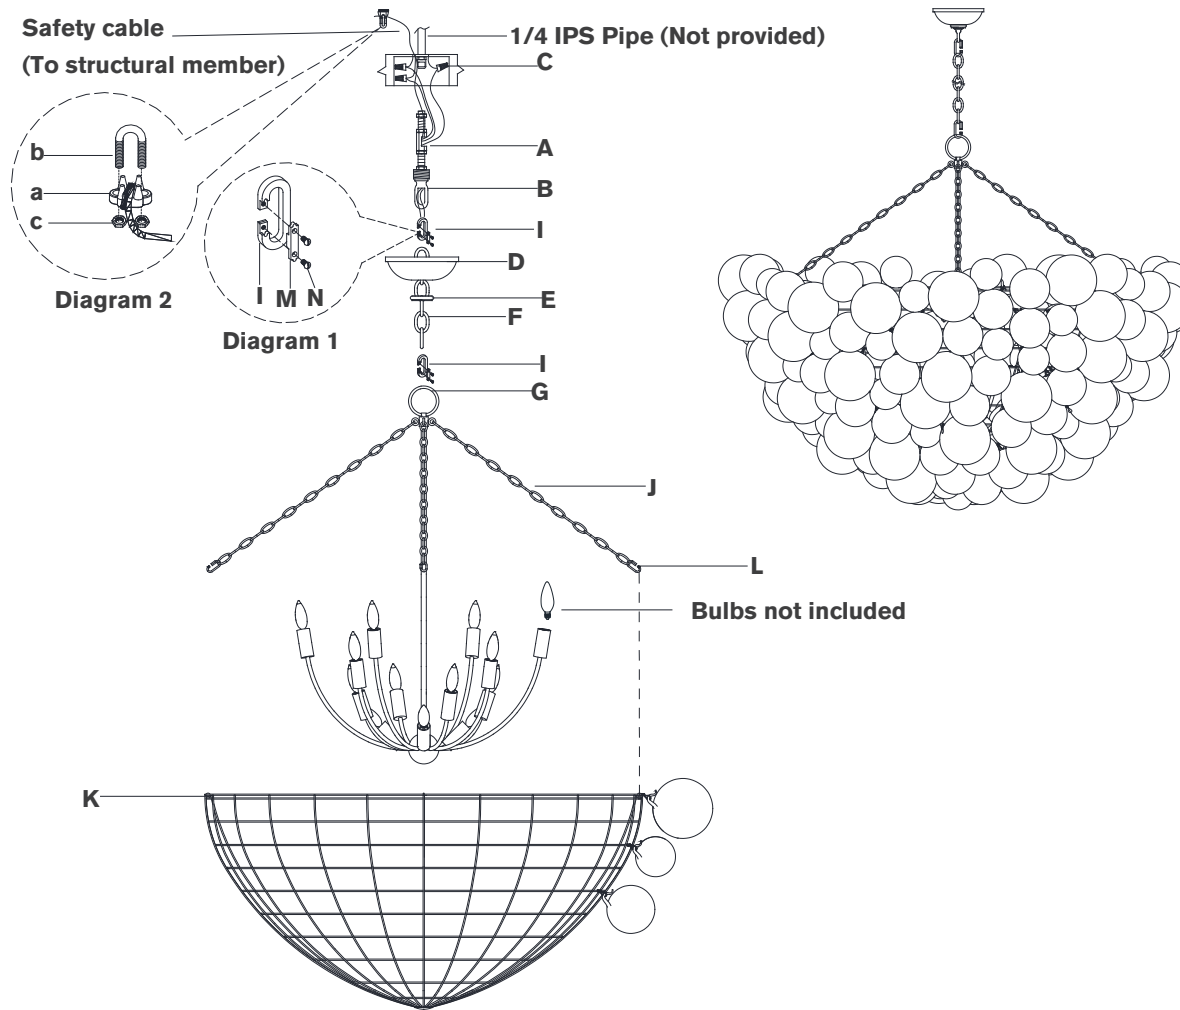

- Twist all fixture wires together. Slip through center hole of collar loop (B).

**NOTE:** Untwist wires and separate to prepare for connection.

- Run safety cable through junction box and around structural member of building. Wrap the safety cable around the saddle (a), and secure with u-bolt (b) and hex nuts (c). (See diagram 2)
- Connect fixture ground wire to supply ground wire (usually green or bare copper) using wire nut (C).

**NOTE:** It is imperative that the fixture is grounded.

- Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (C).
- Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (C).

**CAUTION:** Do not reverse the hot and neutral connections.

- Make sure all wire connections are tight, then carefully tuck into the junction box.
- Install canopy (D) to collar loop (B) and secure with collar ring (E).
- Insert light bulbs into the sockets.
- Attach chains (J) to hooks on fixture body (K) using quick links (I). Secure quick links (L).
- Install glass balls starting from bottom (layer 1) and working your way to the top (layer 1) as shown in figures L1-L11.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.





## ASSEMBLY INSTRUCTIONS

## Talia 56" Chandelier

Item # JN5123


### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

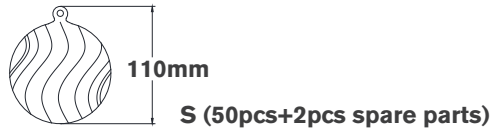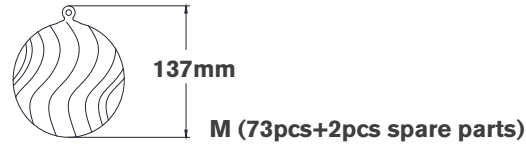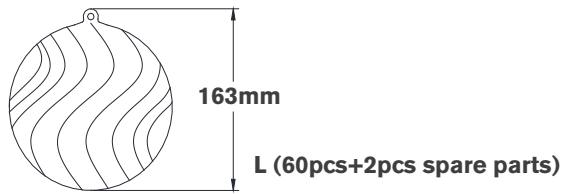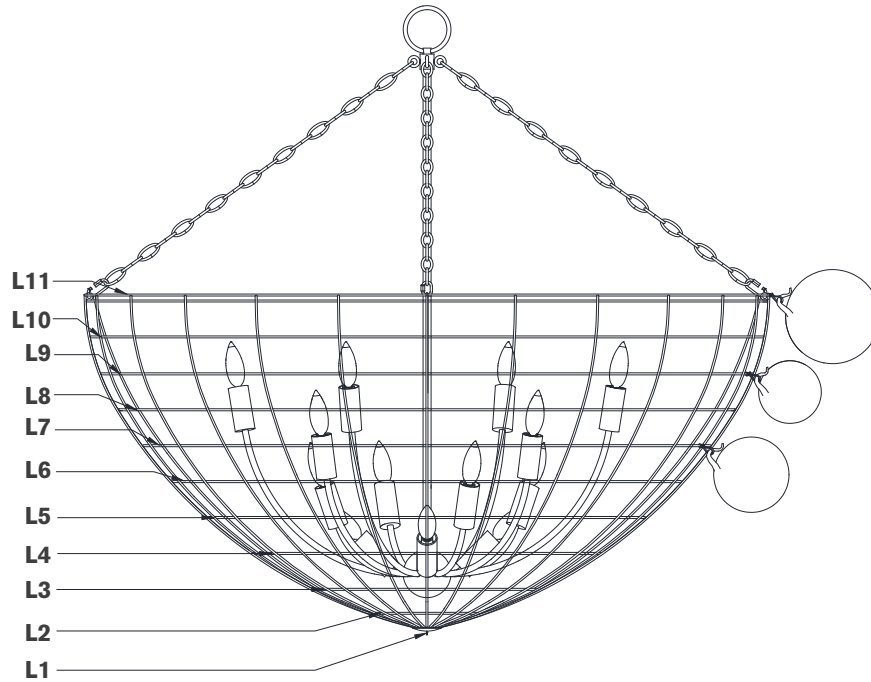


# ASSEMBLY INSTRUCTIONS


L1

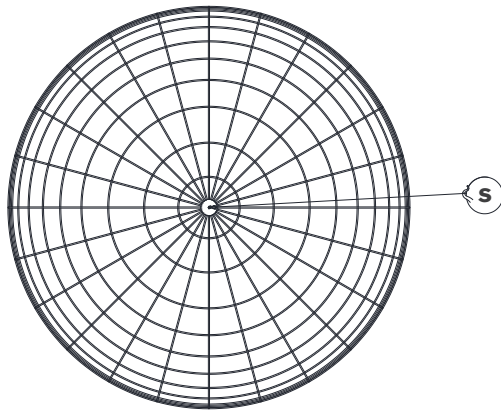


L2

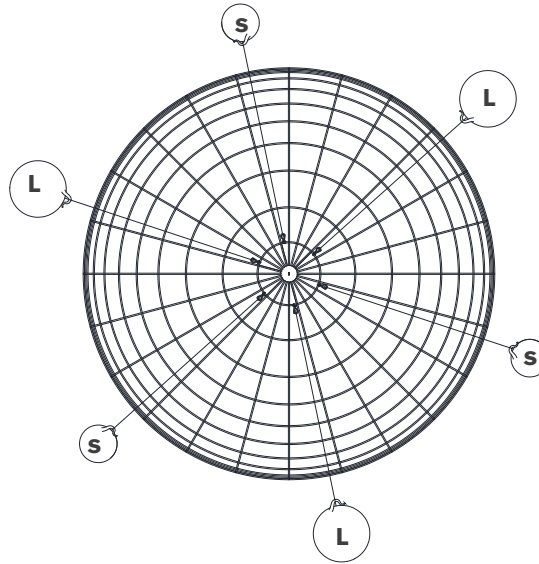

L3

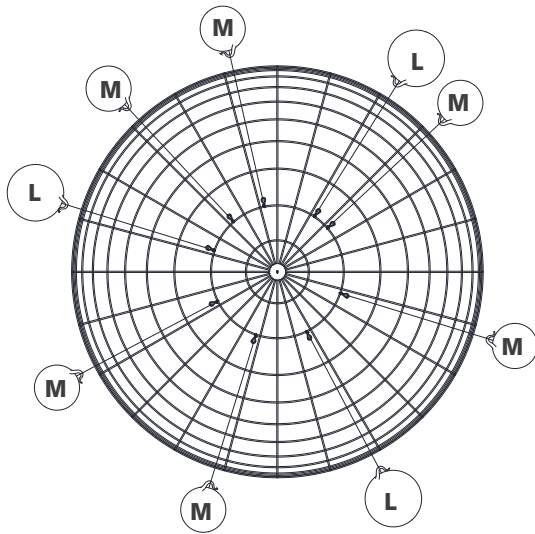

L4

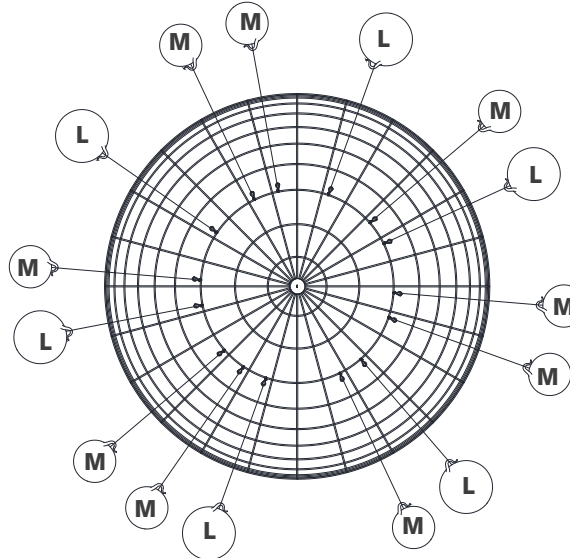

## Talia 56" Chandelier


Item # JN5123

### NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

# ASSEMBLY INSTRUCTIONS


L5

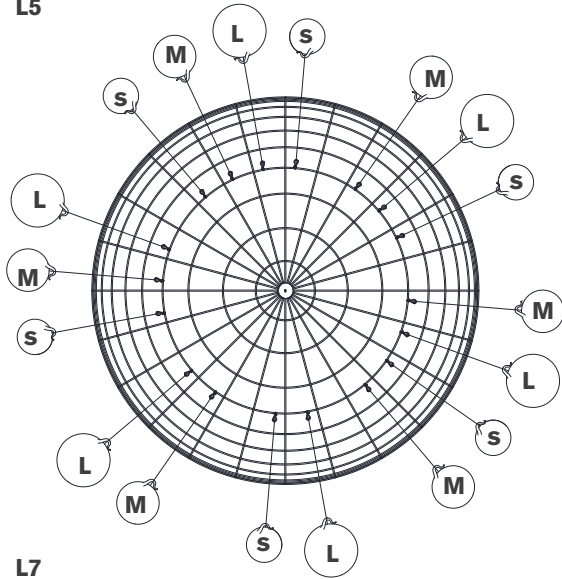


L6

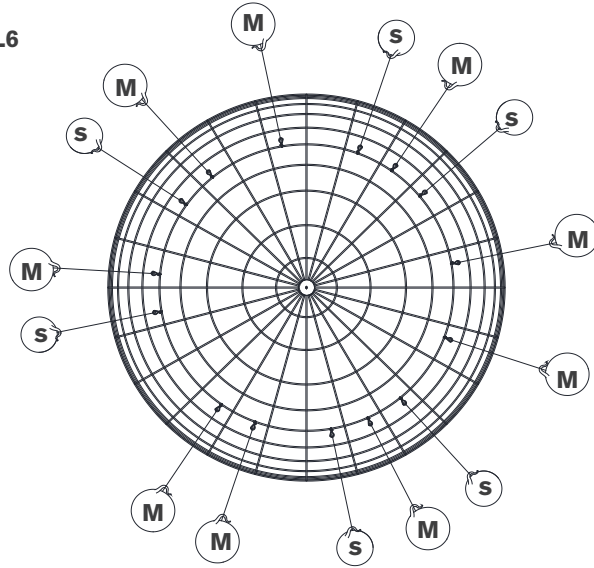

L7

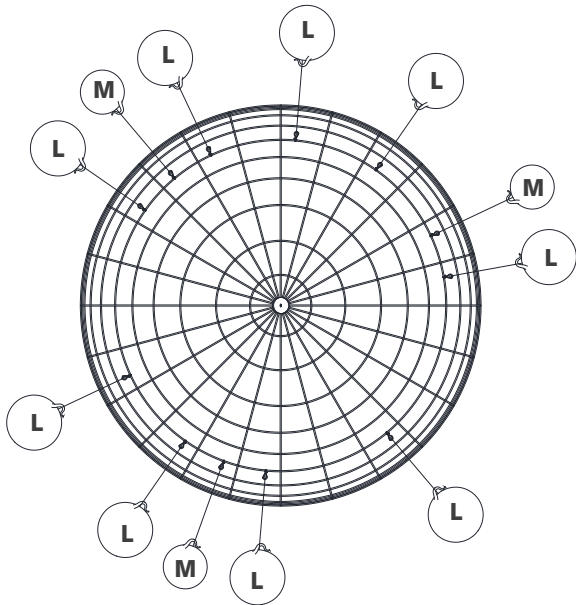

L8

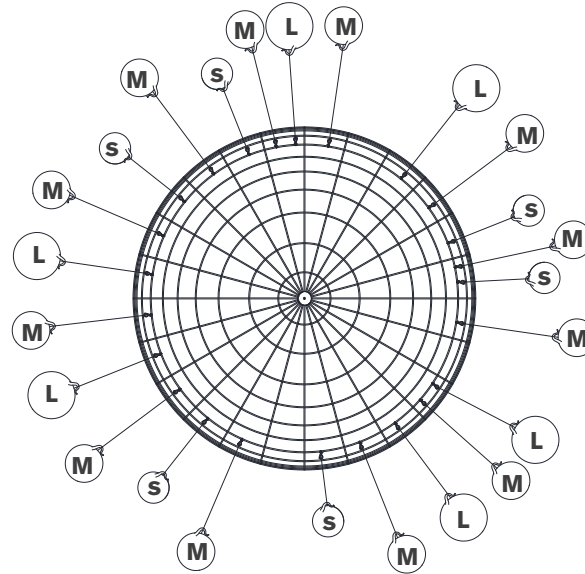

Talia 56" Chandelier


Item # JN5123

**NOTICE:**


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

## ASSEMBLY INSTRUCTIONS


L9

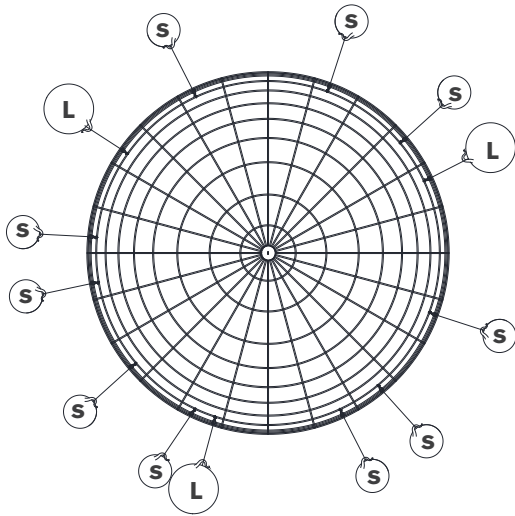

L10

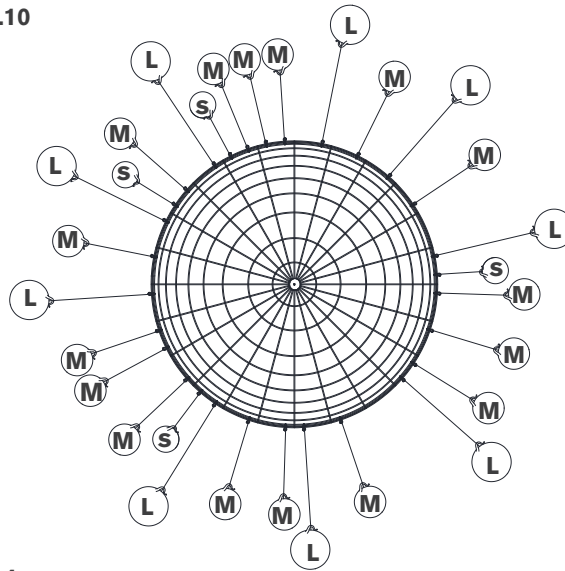

L11

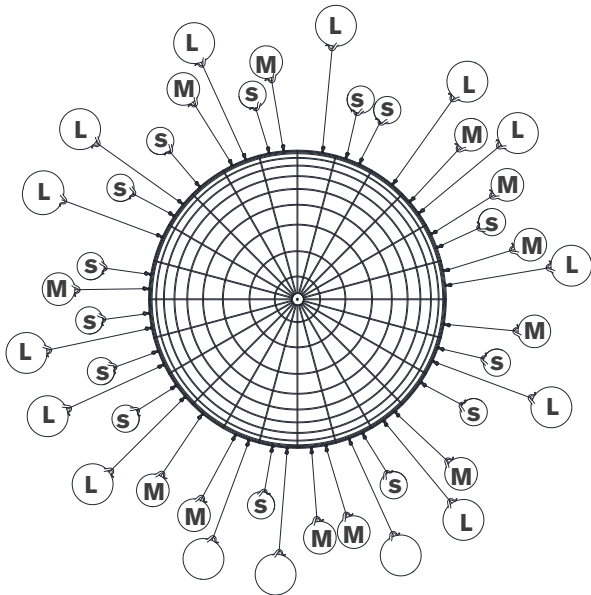

L4

## Talia 56" Chandelier

Item # JN5123

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.