

## Specification Sheet

Model: ARHI28PAA, ARHI34PAA, ARHI40PAA, ARHI46PAA

# RANGE HOOD INSERT



### PRO Range Hood Insert, Stainless Steel Finish

#### Features

- Stainless steel finish
- Fully retractable control knobs with white backlight
- White LED lighting
- Dishwasher-safe stainless steel baffle filters
- 4 Fan speeds with a max of 600 CFM (ARHI28AA & ARHI34PAA)
- 4 Fan speeds with a max of 1200 CFM (ARHI40PAA & ARHI46PAA)

#### Additional Features

- CFMBK600A \*CFM Reduction Kit  
*\*Limits model to first two fan speeds to meet building codes.*
- CFMBK1200A CFM Reduction Kit  
*\*Limits model to only the first fan speed.*

#### Warranty

- 3-year parts, 1-year labor




#### Model Details

Model	ARHI28PAA	ARHI34PAA	ARHI40PAA	ARHI46PAA
Width	28"	34"	40"	46"
Dimensions	28-1/2" W x 22" D x 11-7/8" H	34-1/2" W x 22" D x 11-7/8" H	40-1/2" W x 22" D x 11-7/8" H	46-1/2" W x 22" D x 11-7/8" H
Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Fan Speeds (CFM)	90; 330; 490; 600	90; 330; 490; 600	380; 660; 950; 1200	380; 660; 950; 1200
Duct Size	10"	10"	10"	10"
Sones (High Speed)	10	10	13	13
Sones (Working Speed)	2.0	2.0	2.0	2.0
Grease Filter	Stainless Steel Baffle (2)	Stainless Steel Baffle (2)	Stainless Steel Baffle (2)	Stainless Steel Baffle (3)
Controls	Retractable Rotating Knobs w/ White Backlight	Retractable Rotating Knobs w/ White Backlight	Retractable Rotating Knobs w/ White Backlight	Retractable Rotating Knobs w/ White Backlight
Lighting	2 White LEDs (540 Lumen)	2 White LEDs (540 Lumen)	4 White LEDs (540 Lumen)	4 White LEDs (540 Lumen)



### Accessories

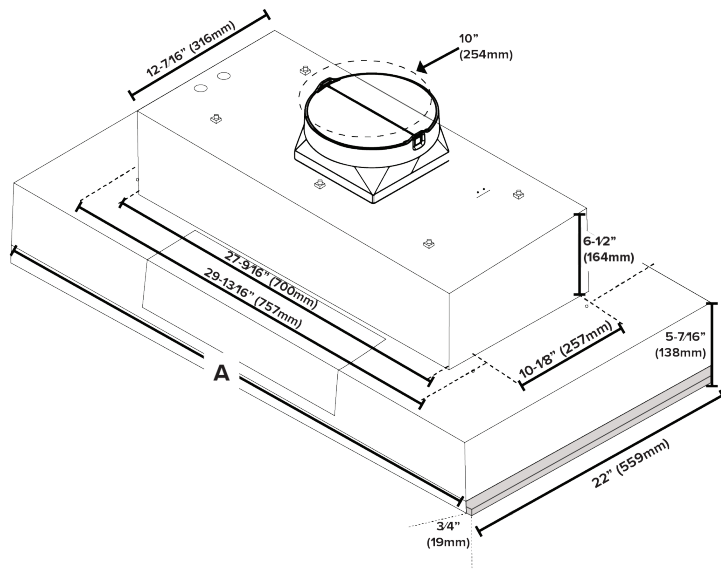

Accessory Model Number	Accessory Description
KIT0192765	Recirculation Filters (Contains 4 round carbon filters)
KIT0192763	Recirculation Deflector (8" or 6" round)
KIT0185271	Transition Reducer (Reduce from 10" down to 8")
KIT0154387	Inline Blower Kit (1200 CFM)
KIT0153054	External Blower Kit (1200 CFM)
KIT0179549	Inline Blower Shell Kit (For use with 1200 CFM models only)
KIT0179547	External Blower Shell Kit (For use with 1200 CFM models only)

\*Compatible 3rd party accessories. Please visit [Build.com](http://Build.com) to order.