





	Type	
	-28	-31
P9210	<input type="checkbox"/>	NA
P9211	<input type="checkbox"/>	NA
P9212	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Lamping	Dimensions (Inches)		
	White	Black		A	B	C
P9210	-28	NA	2/18w CF	12-1/4	7-1/4	5
P9211	-28	NA	2/27w CF	14-1/4	7-1/4	5
P9212	-28	-31	2/39w CF	18	7-1/4	5

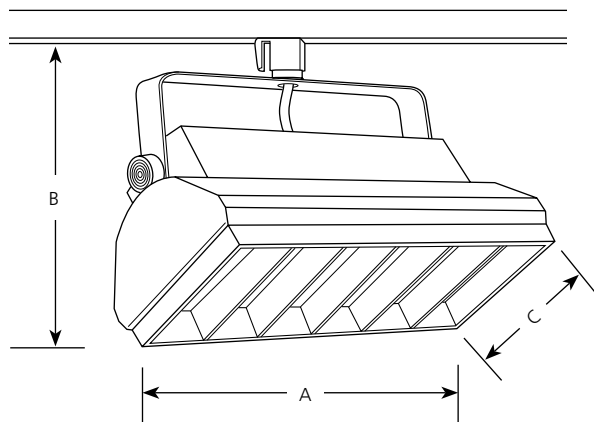

P9210

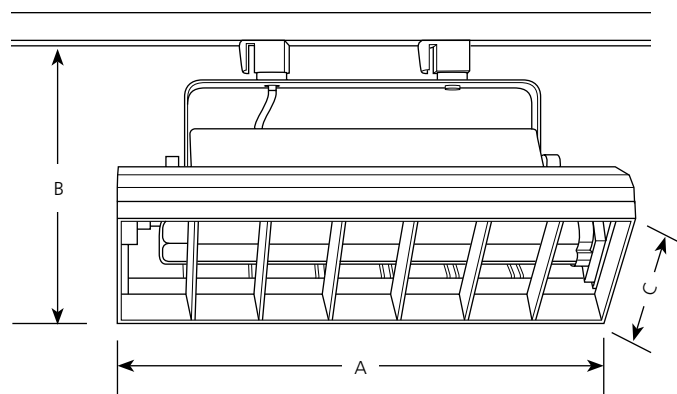

P9211 & P9212

Specifications:

Track Lock Up

- P9210 has one lock up
- P9211 & P9212 have two lock ups
- For use with Alpha (P9100 Series) track
- Polarity oriented
- Quarter-turn locking action
- Tab lock to track to prevent accidental removal

Track Housing Adjustment

- P9210
 - 358 degree horizontal rotation
 - 0 to 90 degree vertical rotation
- P9211 & P9212
 - 0 to 90 degree vertical
- All lock into place with threaded knobs

Track Housing

- Aluminum construction
- Full internal specular aluminum reflector
- 120-volt electronic HPF ballast
- 2G11 base

Louver

- Specular parabolic louver
- Polycarbonate construction
- Snap-in installation and removal

Labeling

- UL-CUL dry location listed

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704

www.progresslighting.com



P9210


Biax Track Wall Washer

Report No. 97022

No. Lamps: 2 Type: 18w BIAX Lumens: 1250

Fixture Aimed 30 degrees in toward wall from straight down

Reflectances: 80% Ceil., 50% Wall, 20% Floor

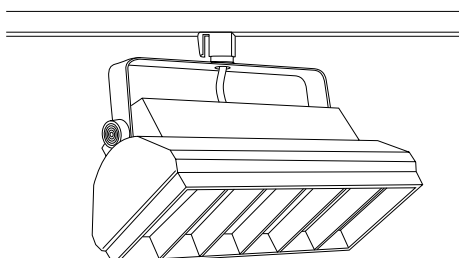

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling Fixture	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture		
1	75	75	58	41	58
2	105	105	82	74	82
3	61	61	49	49	49
4	32	32	27	28	27
5	20	20	17	18	17
6	13	13	11	12	11
7	9	9	8	8	8
8	7	7	6	6	6
9	5	5	5	5	5

Three Feet from Wall

Dist. from Ceiling Fixture	Three Foot Centers			Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture		
1	25	25	25	22	18	22
2	52	52	52	44	39	44
3	45	46	45	38	37	38
4	31	32	31	26	27	26
5	20	21	20	17	18	17
6	14	14	14	12	13	12
7	10	10	10	9	10	9
8	8	8	8	7	8	7
9	7	7	7	6	6	6



P9211


Biax Track Wall Washer

Report No. 97023

No. Lamps: 2 Type: 27w BIAX Lumens: 1800

Fixture Aimed 30 degrees in toward wall from straight down

Reflectances: 80% Ceil., 50% Wall, 20% Floor

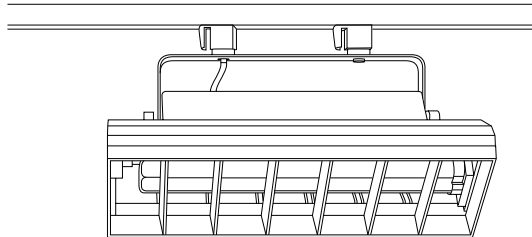

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling Fixture	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture		
1	108	108	84	60	84
2	152	152	118	107	
118					
3	87	87	70	70	70
4	46	46	38	40	38
5	28	28	24	26	24
6	18	18	16	17	16
7	13	13	12	12	12
8	9	9	9	9	9
9	8	8	7	8	7

Three Feet from Wall

Dist. from Ceiling Fixture	Three Foot Centers			Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture		
1	37	36	37	32	25	32
2	74	75	74	64	56	64
3	64	66	64	55	53	55
4	44	46	44	38	38	38
5	28	30	28	25	26	25
6	19	20	19	17	18	17
7	14	15	14	13	14	13
8	11	12	11	10	11	10
9	9	10	9	9	9	9

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704

www.progresslighting.com



P9212


Biax Track Wall Washer

Report No. 97021

No. Lamps: 2 Type: 39w BIAX Lumens: 2850

Fixture Aimed 30 degrees in toward wall from straight down

Reflectances: 80% Ceil., 50% Wall, 20% Floor

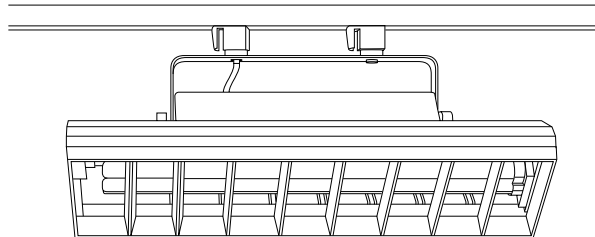

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling Fixture	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture		
1	231	231	177	126	
177					
2	319	319	247	227	
248					
3	180	180	144	145	
144					
4	94	94	79	82	79
5	57	57	50	52	50
6	37	37	34	35	34
7	26	26	24	25	24
8	19	19	18	19	18
9	16	16	15	16	15

Three Feet from Wall

Dist. from Ceiling Fixture	Three Foot Centers			Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture		
1	76	74	76	65	51	65
2	158	159	158	134	120	
134						
3	135	139	135	116	113	
116						
4	91	95	91	79	81	79
5	58	61	58	51	53	51
6	40	41	40	36	38	36
7	30	31	30	27	28	27
8	23	24	23	22	23	22
9	19	20	19	18	19	18

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704