


AquaSense[®] Model TAG _____

ZTR6203-EWS

0.5 gpf Sensor Operated Urinal Flush Valve

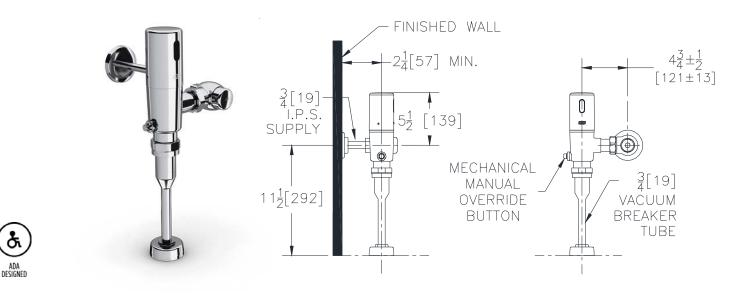

Accessories

🗆 -LL	10 Year Long Life Battery
□-YJ	Split Ring Pipe Support
□-YK	Solid Ring Pipe Support
□-YO	Bumper on Angle Stop
□	Other

NOTE: Performance guaranteed with Zurn EcoVantage[®] fixtures. Please consult Zurn Technical Services at 1-800-997-3876 to discuss the paired performance of this valve with other manufacturers fixtures.



* This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.

ZURN INDUSTRIES, LLC.

COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE

SANFORD NC 27330
PHONE: 1-800-997-3876

FAX: 919-775-3541
WWW.ZURN.COM
IN CANADA:ZURN INDUSTRIES LIMITED
7900 GOREWAY DRIVE UNIT 10

BRAMPTON, ONTARIO L6T5W6
PHONE: 905-405-8272 FAX: 905-405-1292

ENGINEERING SPECIFICATIONS

Exposed chrome plated flushometer valve with a polished robust metal cap exterior.

- Filtered Piston Kit
 - Chloramine resistant
- Proprietary DR resistant low lead brass alloy
- Actuator
 Sensor powered by 4 "AA" batteries
 3 year battery life on 48,000 activations per year
- Mechanical Manual Override Button
- Control Stop

Internal siphon-guard protection Vandal resistant stop cap Sweat solder kit Cast wall flange with set screw

- Vacuum Breaker High back pressure One piece hex coupling nut
- Internal seals
 Chloramine resistant
- Adjustable tailpiece
- Spud coupling and flange for top spud connection