

## Copper Creek Hardware DB(F/H) 3400 Series ANSI Grade-3 Electronic Keypad Deadbolt Specifications

DBF Single Cylinder Deadbolt










DBH Single Cylinder Deadbolt

- Elegant profiles with illuminated keypads.
- · Easy to program.
- Use up to 10 individual pass codes and 1 Master/programming code.
- Replaces any standard deadbolt. Easy to install.
- Vacation Mode.
- Auto lock feature (10-99 seconds)
- Uses 4 standard AA batteries to operate electric latch motor (not included).
- 2 year mechanical and 5 year finish warranty

Deadbolt Specifications & Options					
ANSI / BHMA	Exceeds ANSI Grade-3				
Escutcheon Face Height	4.0"				
Cylinder	KW1 5-pin std., "C" optional.				
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.				
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable optional.				
Strike	PT-DS16 and PT-DS26: Round corner strikes std. Others available.				
Door Prep	Edge bore 1", latch mortise 1"x 2-1/4", cross bore 2-1/8", backset standard 2-3/8", optional 2-3/4".				
Door Thickness	Min 1-3/4", Max 1-3/4".				
Handing	Non-handed				
UL Labeled	Available 20-minute UL Labeled.				
Warranty	2 year mechanical, 5 year finish.				

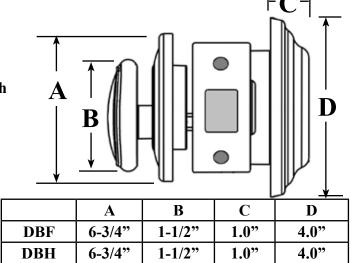

In Stock Finishes							Case Qty	
	SS	ТВ	PS	AB	AN	ВС	PB	Units
DBF	X	X	X					12
DBH	X	X	X					12

Function	Operation				
3410 Single Cylinder Keypad Deadbolt	Lock or unlock deadbolt with key or interior turn-piece. Alternatively unlock from outside by entering cor- rect code.				