



WALL

REVALIA™ REMIX
GLAZED CERAMIC



 dalTile®
IMAGINE WHAT'S POSSIBLE™

REVALIA™ REMIX

GLAZED CERAMIC

Take Shape

Play with the whimsical shapes and colors offered in Revalia™ Remix. This ceramic mosaic collection is full of geometric shapes and eclectic colors. From fan mosaics to kaleidoscope mosaics, Revalia™ Remix will add structural dimension to any design.

- GEOMETRIC DESIGNS
 - Ceramic mosaics offered in unique figures like kaleidoscope and fan shapes
 - Ripple, Bevel, Picket and Structural shapes add a linear design
- ECLECTIC COLOR SELECTION
 - Vibrant colors offered in select shapes
 - Neutral color selections in white, beige and grey

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



CERAMIC



LOW HIGH

SPECIAL FEATURES

SEE CHARTS FOR FULL PRODUCT DETAILS

Cover photo features Revalia™ Remix Peaceful Blend 1 x 4 Picket Mosaic on the wall.
Above photo features Revalia™ Remix Charming Peach 3" Fan Mosaic on the wall.

SIZES:



FINISHES: MATTE | GLOSSY

2 x 8 RIPPLE WALL TILE



WHITE RV05 – MATTE



CREAM RV06 – GLOSSY



GRAY RV07 – GLOSSY

2 x 6 BEVEL CRACKLE MOSAIC




CENTENNIAL WHITE RV08 – GLOSSY




FESTIVE GRAY RV09 – GLOSSY



JUBILEE BEIGE RV10 – GLOSSY

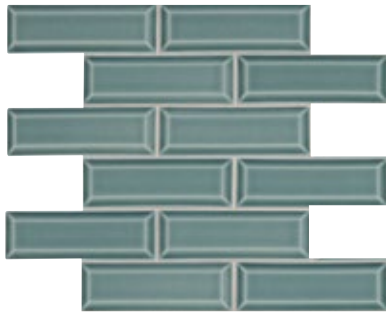

CELEBRATION TEAL RV11 – GLOSSY

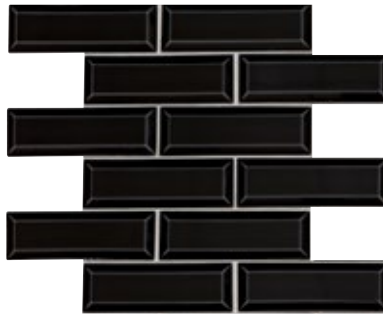

GALA BLACK RV12 – GLOSSY



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics




SIMPLICLEAN™

REVALIA™ REMIX

GLAZED CERAMIC

WALL

1 x 4 PICKET MOSAIC

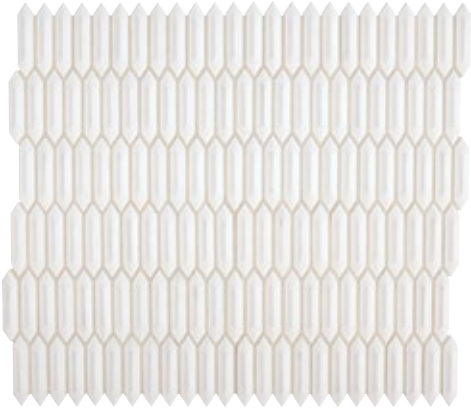

CALMING WHITE RV13 – GLOSSY




PEACEFUL BLEND RV14 – GLOSSY




HOT SPRING BLEND RV15 – GLOSSY

6 x 6 KALEIDOSCOPE MOSAIC

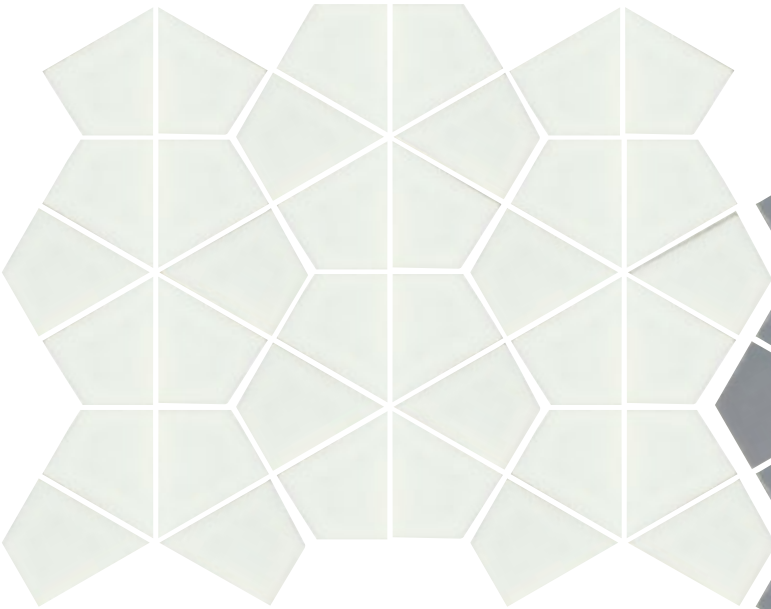

WHITE RV16 – GLOSSY

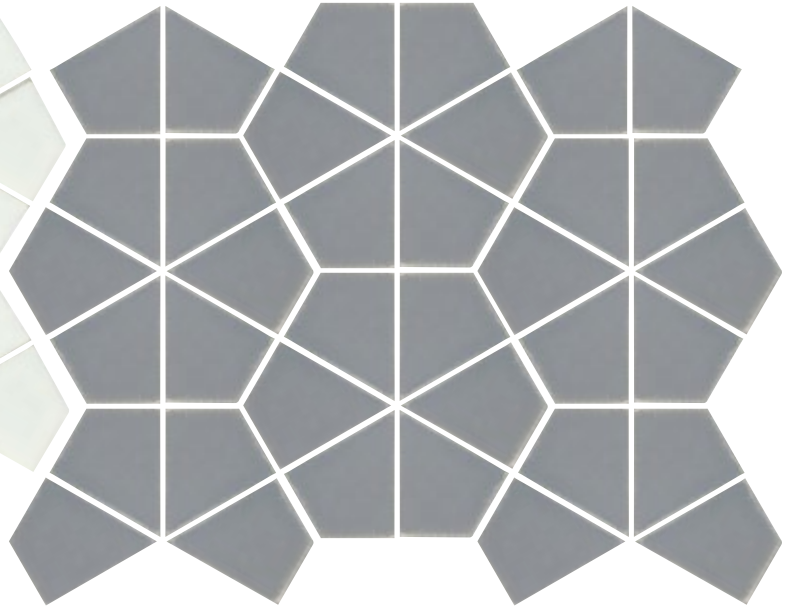


GRAY RV17 – GLOSSY


3 x 4 STRUCTURAL MOSAIC




WHITE RV18 – MATTE



MOSS RV19 – GLOSSY




SAGE GREEN RV20 – GLOSSY

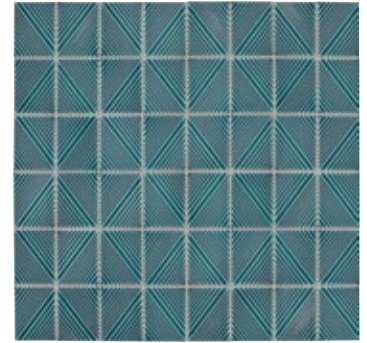


BRILLIANT BLUE RV21 – GLOSSY



SPICE RV22 – GLOSSY



RED RV23 – GLOSSY




MUSTARD RV24 – GLOSSY




METALLIC GRAY RV25 – GLOSSY


3" FAN MOSAIC




FELICITY WHITE RV26 – GLOSSY




GRACEFUL GREIGE RV27 – GLOSSY




DELIGHTFUL TAN RV28 – GLOSSY




EXQUISITE SKY RV29 – GLOSSY



SUBLIME GRAY RV30 – GLOSSY



CHARMING PEACH RV31 – GLOSSY



BLISSFUL BERRY RV32 – GLOSSY



RADIANT BLUE RV33 – GLOSSY

* Available in Matte finish.

** Available in Glossy finish.

REVALIA™ REMIX

GLAZED CERAMIC

WALL

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	2 x 8 Ripple Wall Tile	(2-1/8" x 8-9/16") (5.45 cm x 21.82 cm)	5/16"	10.40	80
	2 x 6 Bevel Mosaic	(15" x 12-1/2" Sheet) (38.10 cm x 31.75cm Sheet) Mesh-mounted	3/8"	10.30	10
	1 x 4 Picket Mosaic	(12-1/2" x 11-1/2" Sheet) (31.75 cm x 29.21 cm Sheet) Mesh-mounted	3/8"	9.40	10
	6 x 6 Kaleidoscope Mosaic	(12" x 15" Sheet) (30.48 cm x 38.10 cm Sheet) Mesh-mounted	1/4"	10.00	10
	3 x 4 Structural Mosaic	(15-5/8" x 11-3/4" Sheet) (39.67 cm x 29.84 cm Sheet) Mesh-mounted	5/16"	10.40	8
	3" Fan Mosaic	(13-3/4" x 13-1/2" Sheet) (34.93 cm x 34.29 cm Sheet) Mesh-mounted	1/4"	10.20	10











APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

* Kaleidoscope and Fan mosaics only

INSTALLATION

Grout Joint Recommendation	Shade Variation
2 x 8 Wall Tile: 1/16" (when rectangular size is used in a staggered brick-joint pattern, overlap should not exceed 33%) Mosaic: 1/8" 3" Fan Mosaic: 1/16"	 Medium (V2)  Picket (Solids)  Kaleidoscope  Structural  Fan
	 High (V3)  Ripple  Bevel
	 Random (V4)  Picket (Blends)

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

APPLICATION NOTES:

Picket, Ripple, Kaleidoscope and Fan suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

Bevel and Structural not recommended for exterior applications.

For 2 x 6 Bevel Crackle Only:

CAUTION

- Crackle tiles must be sealed with a penetrating sealer prior to grouting.
- Periodic resealing of crackle tile is required.
- Wall installation only where tile will not come into contact with staining agents including food.
- Not recommended for wet areas, countertops or floors.

PERFORMANCE CHARACTERISTICS

	ASTM#	2 x 8 Ripple Wall Tile Result	2 x 6 Bevel Mosaic Result	1 x 4 Picket Mosaic Result	6 x 6 Kaleidoscope Mosaic Result	3 x 4 Structural Mosaic Result	3" Fan Mosaic Result
Water Absorption	C373	< 20%	< 20%	< 3.0%	< 3.0%	< 3.0%	< 3.0%
Breaking Strength	C648	120 - 230 lbs	120 - 230 lbs	> 250 lbs	> 250 lbs	> 250 lbs	> 250 lbs
Scratch Hardness	MOHS	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0
Chemical Resistance	C650	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

ZEROTOX
Healthy Homes | Healthy Planet

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.

daltile®
IMAGINE WHAT'S POSSIBLE™
©2021 Daltile (4/21)