





Collection: York

Installation manual for:

OD305W13BK W6.5" H13" E8" L1

**Installation instructions:**

1. Install E26 light source. (Bulbs not supplied)
2. Put glass (P19) into body (P14) and stick sponge on clips (P14). Finally curve clips to fix glass
3. Connect cover (P9) with body (P14) and put rubber ring (P4) and screw (P5) to fixable
4. Secure mounting bracket to the junction box.
5. Black wire from ceiling (junction box) attaches to "L" wire from the fixture
6. White wire from ceiling (junction box) attaches to "N" wire from the fixture
7. "E" wire from the ceiling attaches to "E" wire from the fixture.
8. Use put rubber ring (P11) and screw (P12) to fix lamp with wall mounted.

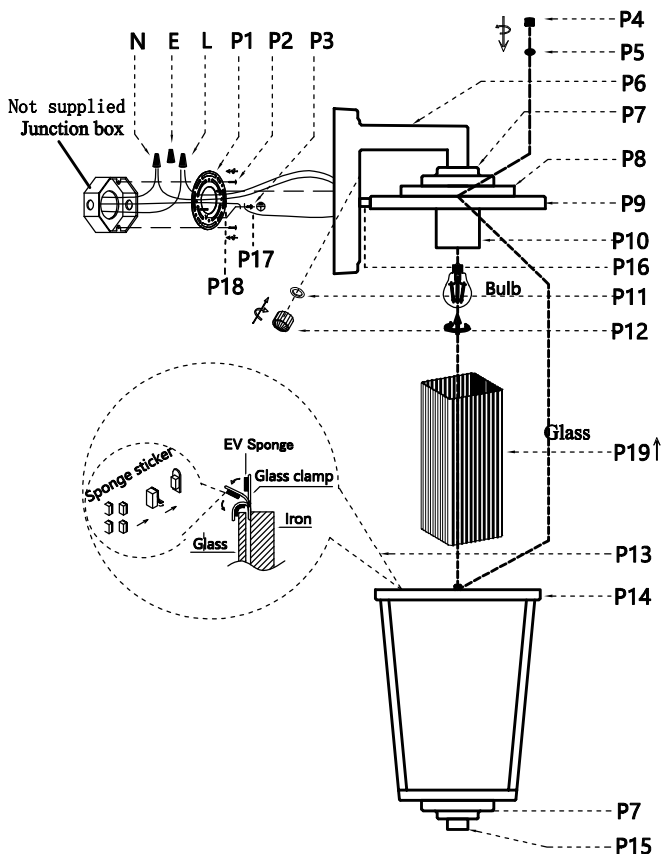

Part Number	Part	Picture	Description	Qty	
MB12W01	P1		Mounting bracket Ø3.94	1	
	P2		Mounting bracket screw M4	2	
	P3		Screw M4	1	
P-OD305W13BK-1	P4		Screw cap	2	
	P5		Rubber ring	2	
	P6		160*115*130mm Arm	1	
	P7		70*70*18MM Cap	2	
	P8		110*110*10MM Box	1	
	P9		170*170*12MM Cover	1	
	P10		E26 Holder	1	
	P11		Rubber ring	2	
	P12		Screw cap	2	
	P13		EV Sponge Sponge sticker	4	
	P14		160*160*205MM Body	1	
	P15		Ø20*12MM Column parts	1	
	P16		Φ 8*10MM Column part	1	
	P17		UL18#Ground wire, L9.8"	1	
	P18		UL18#, L12" Black+White	1	
	GS12L3	P19		85*85*200MM Glass	1

"L" = Hot wire  
"N" = Neutral wire  
"E" = Ground wire