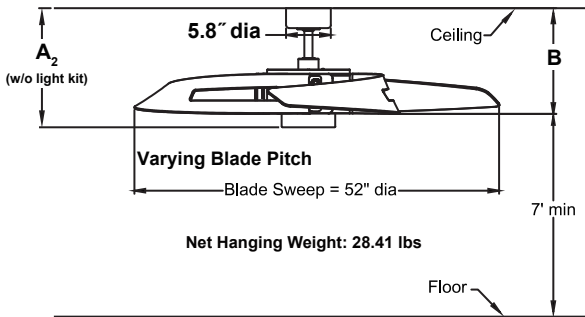
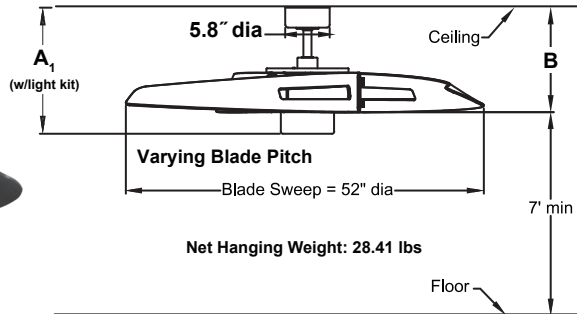


**AVASTON™****FP6210\*\*  
Ceiling Fan**

|                   | A <sub>1</sub> | A <sub>2</sub> | B      |
|-------------------|----------------|----------------|--------|
| Fan w/6" downrod  | 16.34"         | 15.31"         | 13.58" |
| Fan w/12" downrod | 22.34"         | 21.31"         | 19.58" |
| Fan w/18" downrod | 28.34"         | 27.31"         | 25.58" |
| Fan w/24" downrod | 34.34"         | 33.31"         | 31.58" |
| Fan w/36" downrod | 46.34"         | 45.31"         | 43.58" |
| Fan w/48" downrod | 58.34"         | 57.31"         | 55.58" |
| Fan w/60" downrod | 70.34"         | 69.31"         | 67.58" |
| Fan w/72" downrod | 82.34"         | 81.31"         | 79.58" |

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

188 x 20 motor is designed for optimal performance with this fan.

**BLADES SET:**

A set of three composite blades is included.

**LIGHTING OPTIONS:**

Two bulbs (50-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

**CONTROL OPTIONS:**

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry and damp locations.

**Available Finishes**

|    |  |
|----|--|
| OB | Oil-rubbed Bronze with Walnut blade and Opal Frosted Glass/Steel Cap |
| SN | Satin Nickel with Cherry blade and Opal Frosted Glass/Steel Cap      |

**Airflow / Energy Efficiency Info (120V)**

| Fan Speed | Max RPM | CFM  | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High      | 114     | 5309 | 74          | 0.63 | 72    |
| Med       | 92      | 3932 | 123         | 0.49 | 32    |
| Low       | 70      | 2505 | 167         | 0.36 | 15    |