



12 V System


Constant Voltage 12 V Driver

- Suitable for all of the world's power systems
- With an integrated port for a wide selection of switches
- Max. 30 W per light output
- Lead length from driver to switch: Max.: 6 m (236 1/4")

2



- Item No. 833.74.900
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 15\text{ W}$
- Item No. 833.74.917
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20\text{ W}$
- Item No. 833.74.901
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 30\text{ W}$
- Item No. 833.74.913
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 60\text{ W}$
max. 30 W per light output

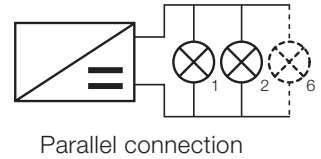

- Input voltage: 100-240 V; 50-60 Hz
- Output voltage: 12 V DC
- Degree of protection: IP 20
- Number of slots: 6 for lights, 1 for switch, 1 for power cord

Material: Plastic; Color: black

L x W x H	Rating	Wattage	Item No.
140 x 43 x 20 (5 1/2" x 1 11/16" x 13/16")	LPS	0 - 15	1 833.74.900
128 x 50.5 x 14 (5 1/16" x 2" x 9/16")	Class 2	0 - 20	2 833.74.917
195 x 43 x 28 (7 11/16" x 1 11/16" x 1 1/8")	LPS	0 - 30	3 833.74.901
208 x 56.5 x 30 (8 3/16" x 2 1/4" x 1 3/16")	Class 2	0 - 60	4 833.74.913

Supplied With
US plug



Power Cord and Adapter


Material: Plastic; Color: black

Description	Item No.
90° plug with 2 m (78 3/4") power cord	833.89.017
90° plug adapter	833.89.018

Country-Specific Primary Leads

Material: Plastic; Color: black

Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.004	833.89.005	833.89.006	833.89.050	833.89.008
Plug design									
Designation	UK	AU	EU	US	JP	CN	KR	US	US
Voltage (V)	250	250	250	120	100	250	250	120	120
Length	2000 (78 3/4")								3000 (118")

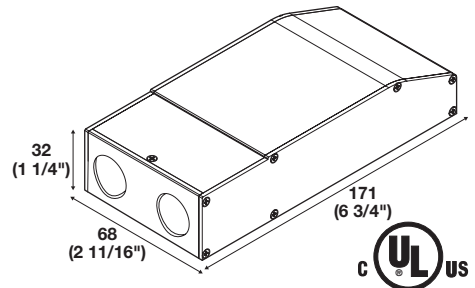

Dimmable E-series Driver

- Output Voltage: 12 VDC
- Input Voltage: 120 V 60 Hz
- Degree of protection: Nema 3R enclosure type
- Hard wired by licensed electrician only
- Dimmable with any standard MLV/CL (Triac) Forward Phase Dimmer Switch
- Class 2 low voltage power supply
- 8 W min load
- L x W x H: 172 x 69 x 32 mm
(6 3/4" x 2 11/16" x 1 1/4")

Material: Aluminum; Color: black

Max. Load	Output Current	Item No.
20 W	1.67 A	833.02.964
40 W	3.33 A	830.02.963
60 W	5 A	833.02.962

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"



Switches	pages 2.74 - 2.76
Extension leads	page 2.78

Dimensions in mm
Inches are approximate