

Center Drains Standard Installation

Features

- 3/16" Thick Stainless Steel Strainer - Compression Fit
- 2" Residential Throat or 4" High Flow Throat (for 5" strainers)
- Indoor or Outdoor Use
- Drain body (Cast Iron, PVC, or ABS) with 2" or 4" throat
- Includes hair strainer and lift-out key
- Available in 6 patterns and four finishes
- Requires traditional 4-way floor pitch
- Compatible with: PVC Liner, Rubber Liner (Chloraloy®), Hot Mop, Lead Pan, Copper Pan, or Fiberglass
- Flow rate - measured at outlet only. Measurement does not account for water in throat or sheeting on shower floor.
 - 9 gpm - Residential 2" Throat
 - 21 gpm - High Flow 4" Throat


Installation



Care & Maintenance

Center drain stainless steel linear drain top grates are made of 316L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Compound 302® may be needed. For Polished Stainless and other finishes we recommend a mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub® with Bleach, or Compound 302®. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.


Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com

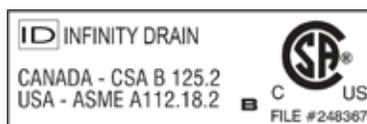

NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 4" x 4" Standard Clamp Down Drain Installation

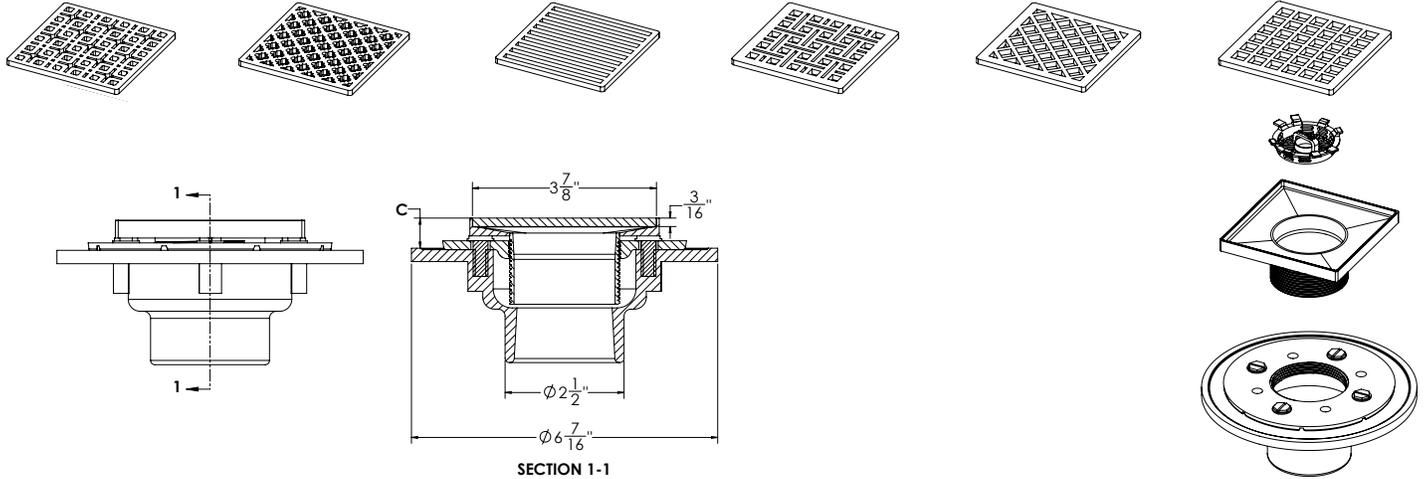


Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> QD 4-2		1 - Q 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	4"	4"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> XD 4-2		1 - X 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	4"	4"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> VD 4-2		1 - V 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	4"	4"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> ND 4-2		1 - N 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	4"	4"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> MD 4-2		1 - M 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	4"	4"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> KD 4-2		1 - K 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	4"	4"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"

Finishes

- Satin Stainless
 Polished Stainless
 Lifetime Oil Rubbed Bronze
 Satin Bronze


Infinity Drain
 145 Dixon Avenue
 Amityville, NY 11701
 Phone: 516.767.6786
 Fax: 516.740.3066
www.Infinity Drain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 5" x 5" Standard Clamp Down Drain Installation

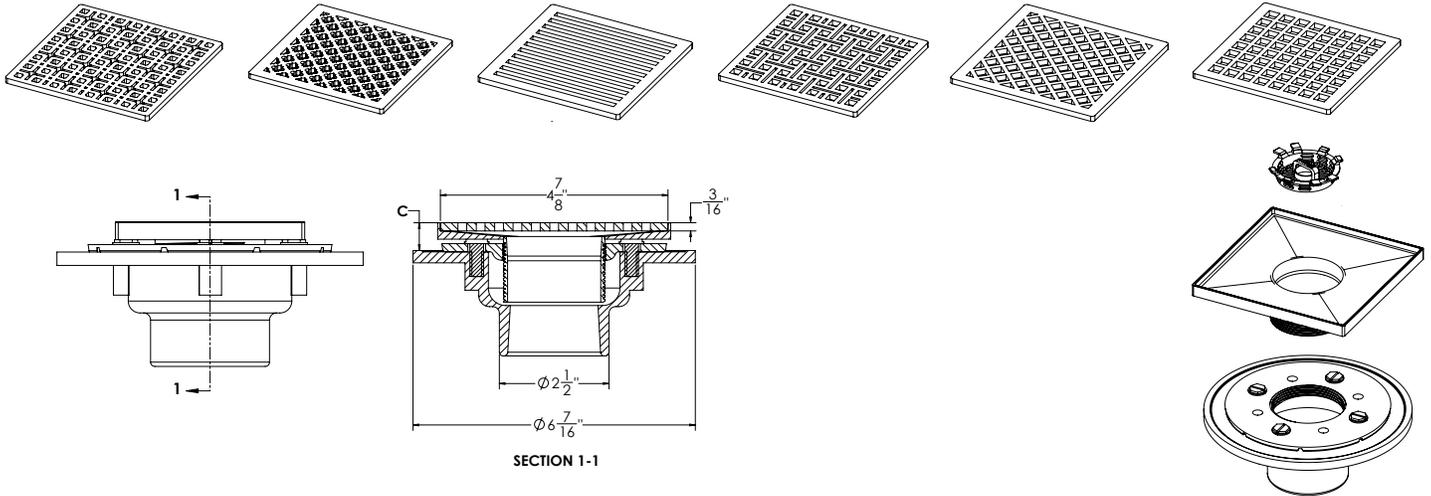

Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> QD 5-2		1 - Q 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> XD 5-2		1 - X 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> VD 5-2		1 - V 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> ND 5-2		1 - N 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> MD 5-2		1 - M 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> KD 5-2		1 - K 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"

Finishes


Satin Stainless

Polished Stainless

Lifetime Oil Rubbed Bronze

Satin Bronze


Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com

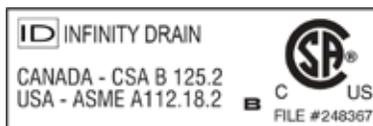

NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 5" x 5" HIGH FLOW Clamp Down Drain Installation

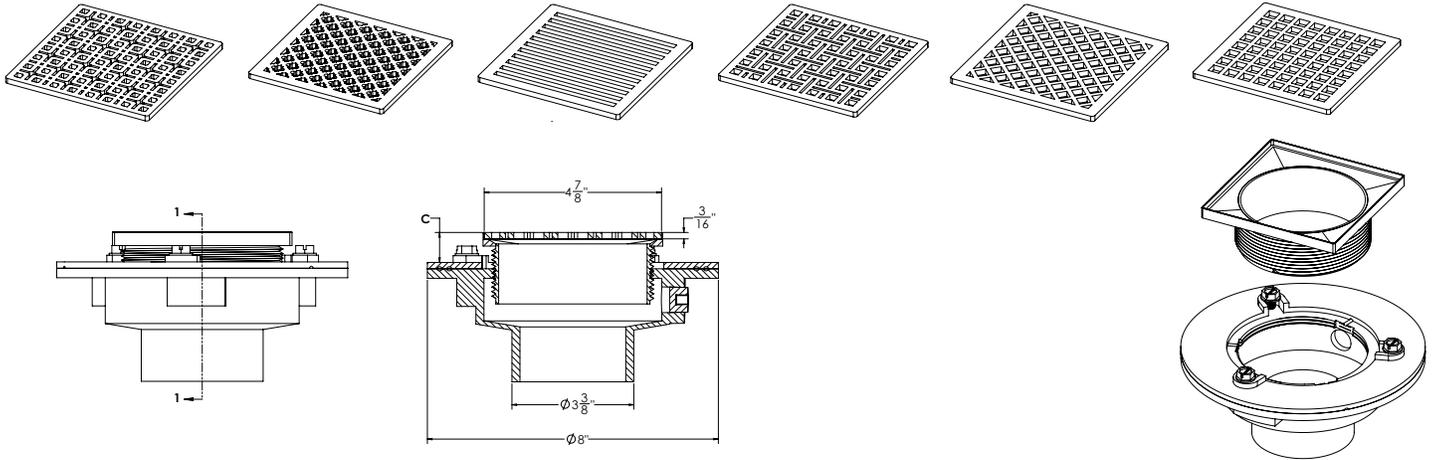

SECTION 1-1

Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> QD 5-3		1 - Q 5 Stainless Steel Strainer 1 - T 54 Stainless Steel 4" Throat 1 - HS 4 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 4" Throat, 3" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> XD 5-3		1 - X 5 Stainless Steel Strainer 1 - T 54 Stainless Steel 4" Throat 1 - HS 4 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 4" Throat, 3" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> VD 5-3		1 - V 5 Stainless Steel Strainer 1 - T 54 Stainless Steel 4" Throat 1 - HS 4 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 4" Throat, 3" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> ND 5-3		1 - N 5 Stainless Steel Strainer 1 - T 54 Stainless Steel 4" Throat 1 - HS 4 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 4" Throat, 3" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> MD 5-3		1 - M 5 Stainless Steel Strainer 1 - T 54 Stainless Steel 4" Throat 1 - HS 4 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 4" Throat, 3" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> KD 5-3		1 - K 5 Stainless Steel Strainer 1 - T 54 Stainless Steel 4" Throat 1 - HS 4 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 4" Throat, 3" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"

Finishes


Satin Stainless

Polished Stainless

Lifetime Oil Rubbed Bronze

Satin Bronze


Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com






NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 5" x 5" Round Standard Clamp Down Drain Installation

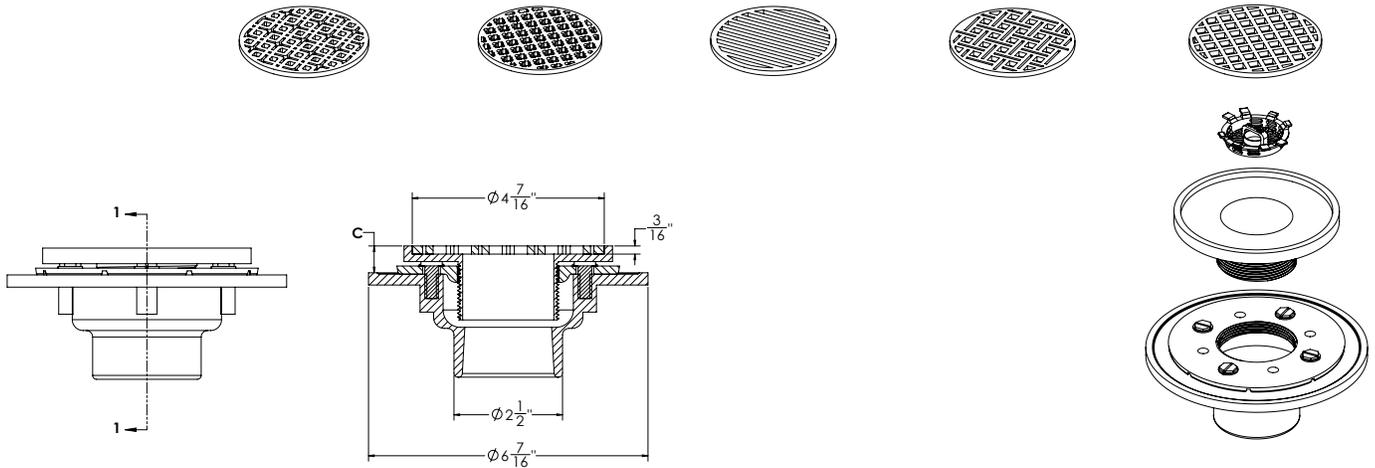


Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> RQD 5-2		1 - RQ 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RVD 5-2		1 - RV 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RND 5-2		1 - RN 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RMD 5-2		1 - RM 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RKD 5-2		1 - RK 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"

Finishes

- Satin Stainless Polished Stainless Lifetime Oil Rubbed Bronze Satin Bronze




Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com




NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 5" x 5" Round High Flow Clamp Down Drain Installation



SECTION 1-1




Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> RQD 5-2		1 - RQ 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RVD 5-2		1 - RV 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RND 5-2		1 - RN 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RMD 5-2		1 - RM 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"
<input type="checkbox"/> RKD 5-2		1 - RK 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (Cast Iron, ABS, or PVC)	5"	5"	With CDI 22: 5/8" With CDA 22: 9/16" With CDP 22: 9/16"

Finishes

Satin Stainless Polished Stainless Lifetime Oil Rubbed Bronze Satin Bronze

Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Center Drains

Bonded Flange Installation

Features

- 3/16" Thick Stainless Steel Strainer - Compression Fit
- 2" Residential Throat
- Indoor or Outdoor Use
- Drain body (PVC, or ABS) with 2" throat - 2",3" or 4" outlet
- Includes hair strainer and lift-out key
- Available in 6 patterns and four finishes
- Requires traditional 4-way floor pitch
- Compatible with: Liquid Applied or Fabric Sheet membrane waterproofing
- Flow rate - measured at outlet only. Measurement does not account for water in throat or sheeting on shower floor.
9 gpm - Residential 2" Throat


Installation



Care & Maintenance

Center drain stainless steel linear drain top grates are made of 316L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Compound 302® may be needed. For Polished Stainless and other finishes we recommend a mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub® with Bleach, or Compound 302®. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.


Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com

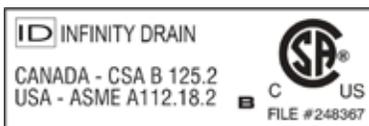

NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 4" x 4" Bonded Flange Installation

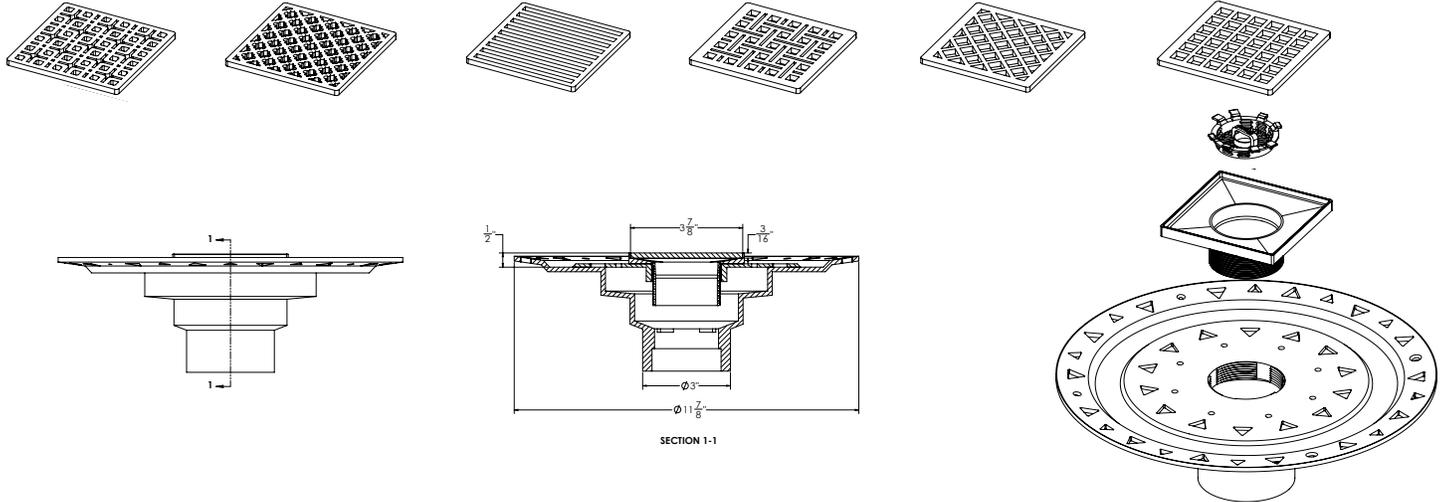


Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> QDB 4-2		1 - Q 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	4"	4"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> XDB 4-2		1 - X 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	4"	4"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> VDB 4-2		1 - V 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	4"	4"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> NDB 4-2		1 - N 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	4"	4"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> MDB 4-2		1 - M 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	4"	4"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> KDB 4-2		1 - K 4 Stainless Steel Strainer 1 - T 42 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	4"	4"	With BFP 22: 3/8" With BFA 22: 3/8"

Finishes

- Satin Stainless Polished Stainless Lifetime Oil Rubbed Bronze Satin Bronze


Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 5" x 5" Bonded Flange Installation

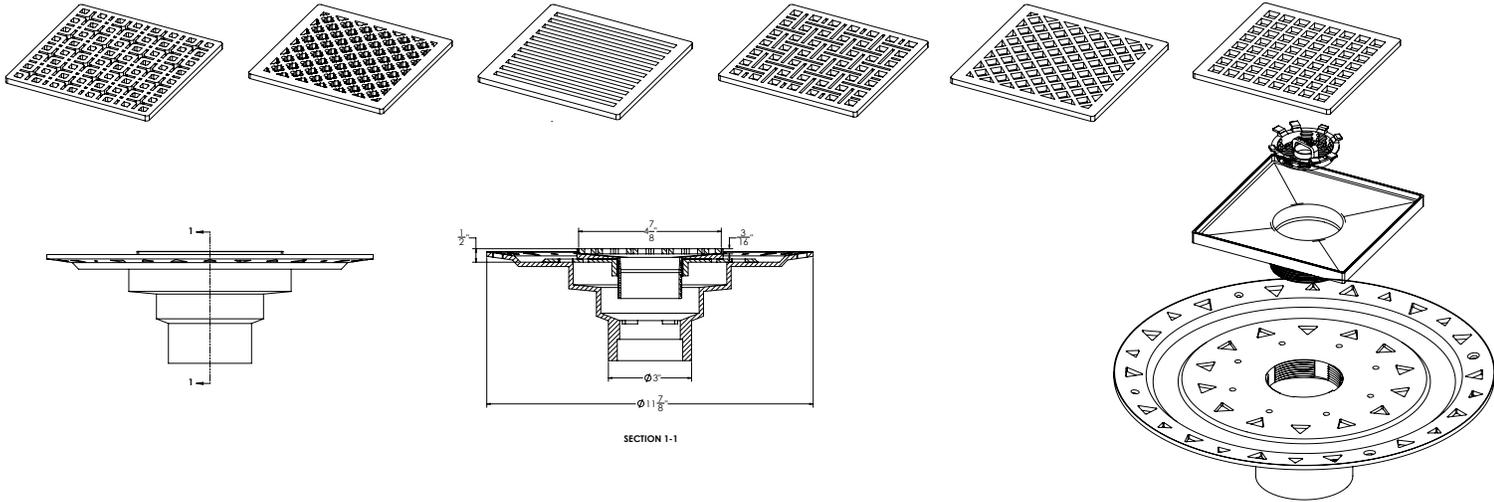


Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> QDB 5		1 - Q 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> XDB 5		1 - X 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> VDB 5		1 - V 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> NDB 5		1 - N 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> MDB 5		1 - M 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> KDB 5		1 - K 5 Stainless Steel Strainer 1 - T 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"

Finishes

- Satin Stainless Polished Stainless Lifetime Oil Rubbed Bronze Satin Bronze


Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

ID Infinity Drain

CENTER DRAINS - 5" x 5" Round Bonded Flange Installation

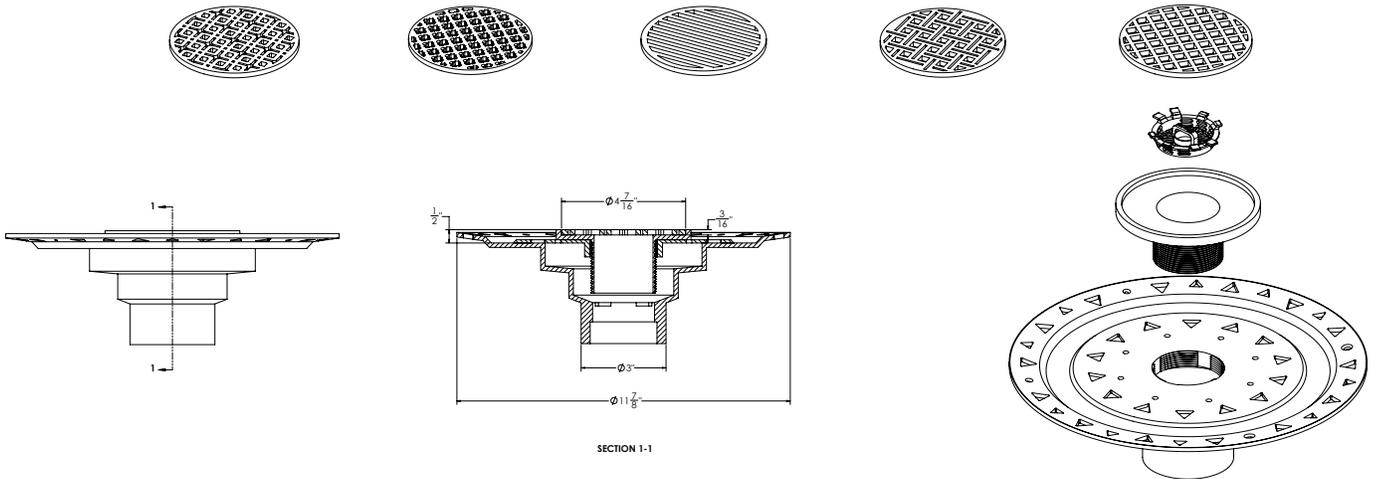


Model Number	Style	Complete Kit Contents	A (Overall Throat Width)	B (Overall Throat Length)	C (Minimum Height Above Waterproofing) * All heights can be adjusted upwards an additional 1-1/4"
<input type="checkbox"/> RQDB 5		1 - RQ 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Bonded Flange Drain Body (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> RVDB 5		1 - RV 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> RNDB 5		1 - RN 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> RMDB 5		1 - RM 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"
<input type="checkbox"/> RKDB 5		1 - RK 5 Stainless Steel Strainer 1 - RT 52 Stainless Steel 2" Throat 1 - HS 2 Hair Strainer 1 - DKEY Lift-Out Key 1 - Clamp Down Drain - 2" Throat, 2" Outlet (ABS, or PVC)	5"	5"	With BFP 22: 3/8" With BFA 22: 3/8"

Finishes

Satin Stainless Polished Stainless Lifetime Oil Rubbed Bronze Satin Bronze

Infinity Drain
145 Dixon Avenue
Amityville, NY 11701
Phone: 516.767.6786
Fax: 516.740.3066
www.Infinity Drain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.