

Features

- The bridge and switch module system allows the user to control and operate most electrical devices from the DTV+ interface.
- On/off switch module provides control of the electrical device and communication to the DTV+ bridge module.
- DTV+ system can control up to three switch modules utilizing the bridge module.
- On/off switch modules must be located within 25ft of the bridge module for reliable operation.
- Timer function for precise control.
- Example applications: Bathroom lighting, bathroom fans, switchable glass, towel warmers.

Material

- Premium material construction ensures reliability and durability.

Required Accessories

- K-99695 System Controller Module
- K-99701 Bridge Module




Codes/Standards

UL 244A
CSA C22.2 No. 14

KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty

See website for detailed warranty information.

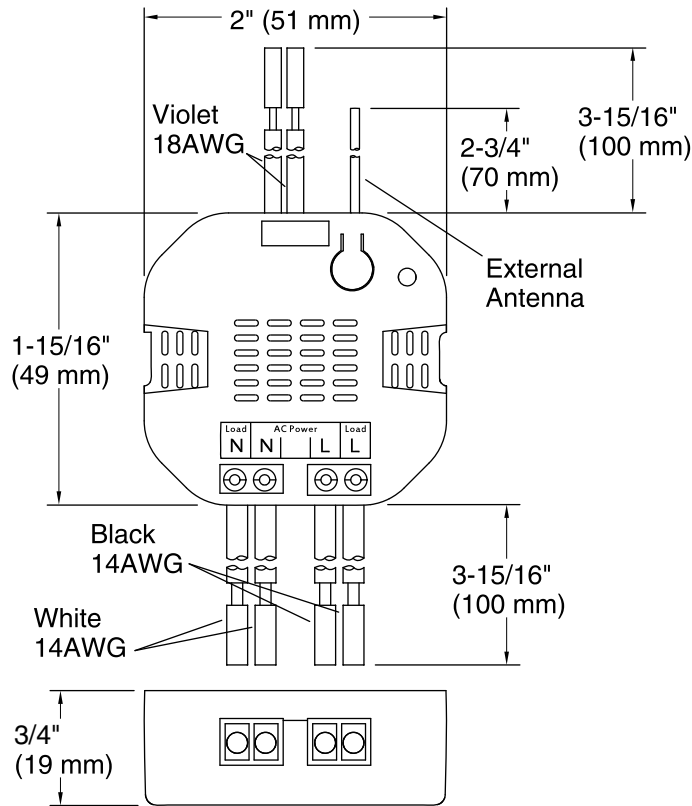

Required Electrical Service

One circuit required.

Lights: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Electrical component Lights: 120 V, 10 A, 60 Hz rating:

Notes

Install this product according to the installation guide.

Recommended that the product be installed by a qualified electrician.

Maximum load is 120 V, 60 Hz, 10 A.

Requires a plastic electrical box 3" (76 mm) x 2" (51 mm) x 2-3/4" (70 mm) or larger, minimum volume of 14 cubic inches.

On/off switch will not work if installed in a metal electrical box.

Do not install to a dimmer switch, a three-way switch, or a switch that controls an electrical outlet.

Install using copper wiring only. Connection to a neutral wire is required.

Building materials may block signal. May need to move the bridge to another location if the switch modules do not pair.

Locate within 25 ft (7.62 m) of the bridge.