



Anthem® | K-28211

Four-port digital thermostatic valve

Features

- Digitally controlled thermostatic mixing valve
- Antiscald protection
- Built-in temperature and flow control
- Allows for two different temperature and flow zones in your shower
- Selecting "low flow" mode on setup limits total flow to 1.75 gpm (6.6 lpm) for installations where water conservation or CEC-compliance is desired
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- Up to 22 gpm (83 lpm) flow rate at 45 psi (3.1 bar) with maximum flow of 9.5 gpm (36 lpm) from one outlet
- Four independently controllable 1/2" (13 mm) outlets with brass tube connections
- 3/4" (19 mm) inlets with brass tube connections



Available Colors/Finishes

Color tiles intended for reference only.

^{NA} NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 10:4 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16
UL 1951
CSA C22.2 No. 14
CSA C22.2 No. 68
cUL Listed
UL Listed

Valves

Included Valves: Digital, Thermostatic Mixer, Volume Control

Shower Valve

Flow Rate Maximum @ 45 psi: 22.5 gpm (85.2 l/min)
Manufacturer's Minimum Rated Flow: 0.9 gpm (3.4 l/min)
Pressure: 45 psi (3.1 bar)
Maximum Static Pressure: 125 psi (8.6 bar)
Minimum Operating Pressure: 15 psi (1 bar)

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure: 15 psi (103.4 kPa)
Minimum Flow Rate: 0.9 gpm (3.4 l/min)

Material

- Reinforced engineering-grade thermoplastic body

Connectivity



The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license.

Amazon, Alexa and all related logos are trademarks of Amazon, Inc. or its affiliates.

Google, Google Home and Google Play are trademarks of Google LLC.

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Thermostatic valve: 120 V, 1.6 A, 60 Hz

Electrical Component Ratings

Thermostatic valve: 120 V, 1.6 A, 60 Hz


Cables: Data: 32 ft. (9.8 m)

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty



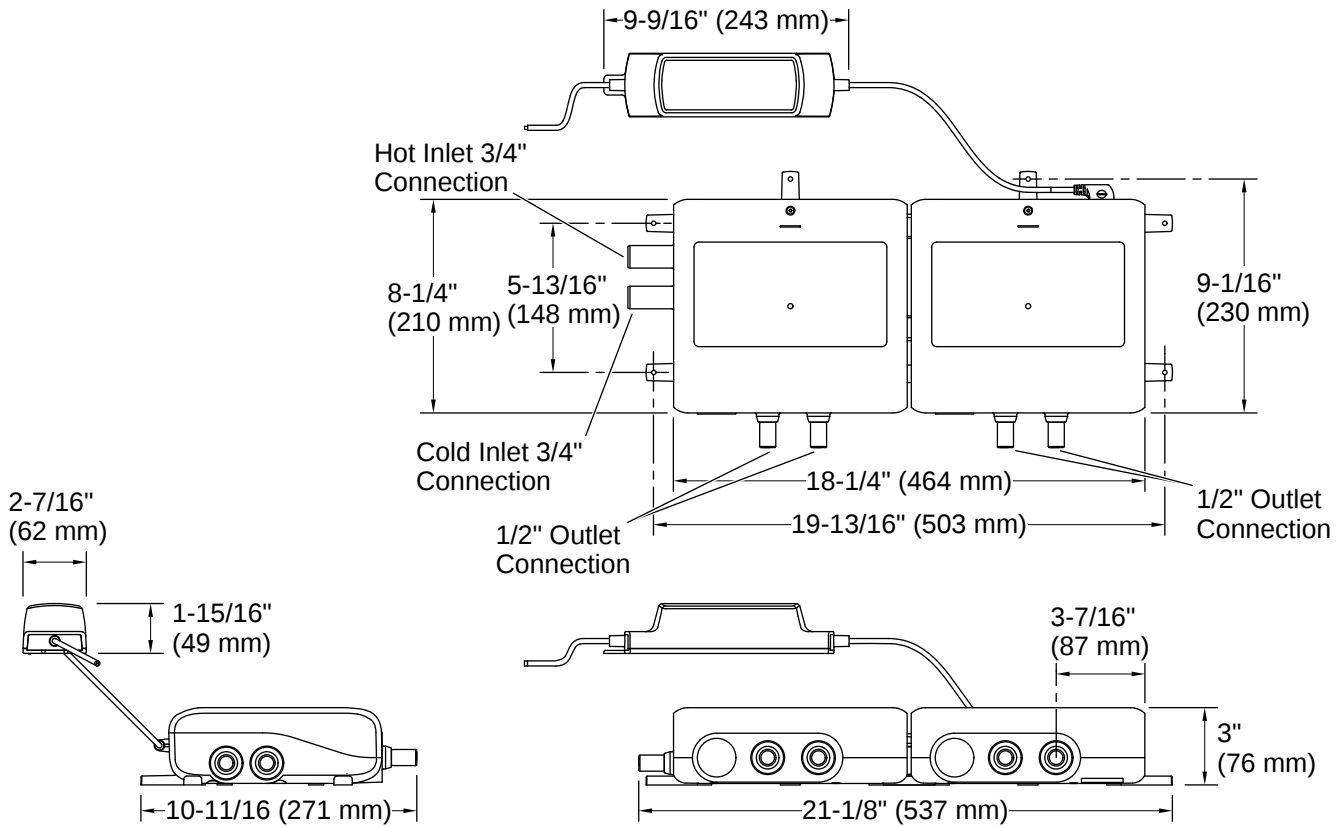

Installation

- Mounts within standard 2" x 4" (38 x 102 mm) walls
- Install valve approximately 32' (9754 mm) away from the digital control (cable supplied with control)
- Prewired with two-prong plug for connection to 120 V GFCI receptacle
- After digital control is connected to valve and power source, follow on-screen prompts for easy setup; no Internet needed. (Digital control sold separately)

Installation Notes

Install this product according to the installation instructions.

Ports should be tied together in the event a port is not utilized. Do NOT cap any port.

For use with showerheads or handsprays rated at 0.9 gal/min (3.4 l/min) or higher.





Anthem+™ | K-28214-ASC

Digital control

Features

- Digital control with easy-to-read icons and configurable touch screen
- Control steam along with temperature and flow for up to 12 shower outlets from a simple, intuitive interface
- Turn the large KOHLER® dial for easy temperature and flow rate adjustment
- Nine user-definable presets let you save your favorite shower settings
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- System warm-up and pause feature
- Includes optional flow restrictor, limiting total flow to 1.75 gpm (6.6 lpm), for installations where water conservation or CEC compliance is desired
- Connect up to four controls within your digital shower system
- Pair with optional Anthem remote on/off button; sold separately
- Requires Anthem+ system controller module and an Anthem digital thermostatic valve (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 2:12 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

CSA C22.2 No. 14

CSA C22.2 No. 68

ADA

ICC/ANSI A117.1

Valves

Required Valves: Digital, Thermostatic

Material

- Premium material construction for durability and reliability
-

Recommended Products/Accessories

K-28213 Remote on/off button for digital thermostatic valve

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 2:12 - US-CA

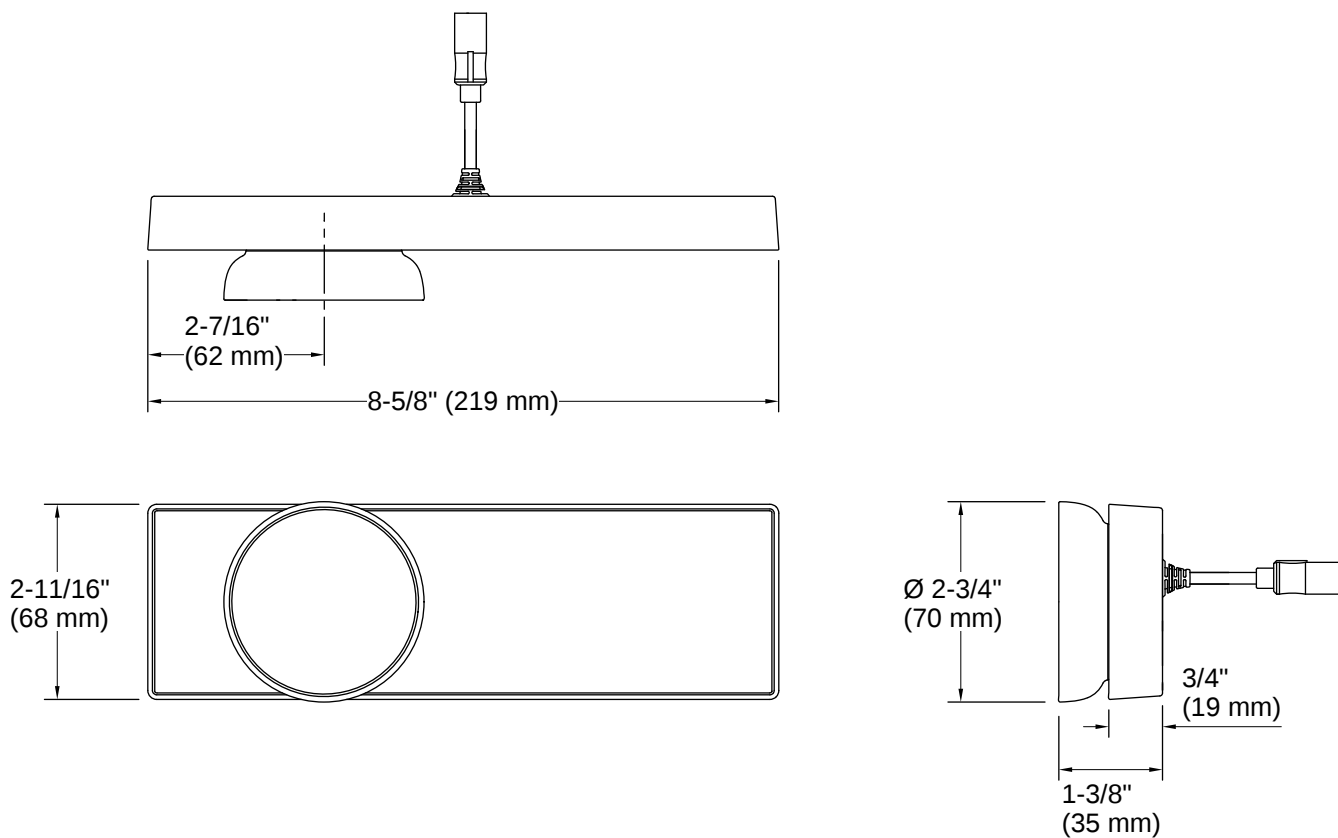

Installation

- After digital control is connected to system controller, valve, and power source, follow on-screen prompts for easy setup; no Internet needed
- Wall-mount

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.





Parallel® | K-24805

Single-function showerhead, 2.5 gpm

Features

- Single-function showerhead with 48 nozzle 5" (127 mm) diameter sprayface
- Optimized sprayface for maximum performance
- 2.5 gpm (9.5 lpm) maximum flow rate at 45 psi (3.1 bar)
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Coordinates with other products in the Parallel collection



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 5:36 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 2.5 gpm (9.5 l/min)
Maximum Flow:

Material

- Premium material construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-7397 Shower arm and flange, 7-1/2" long

Technology


- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



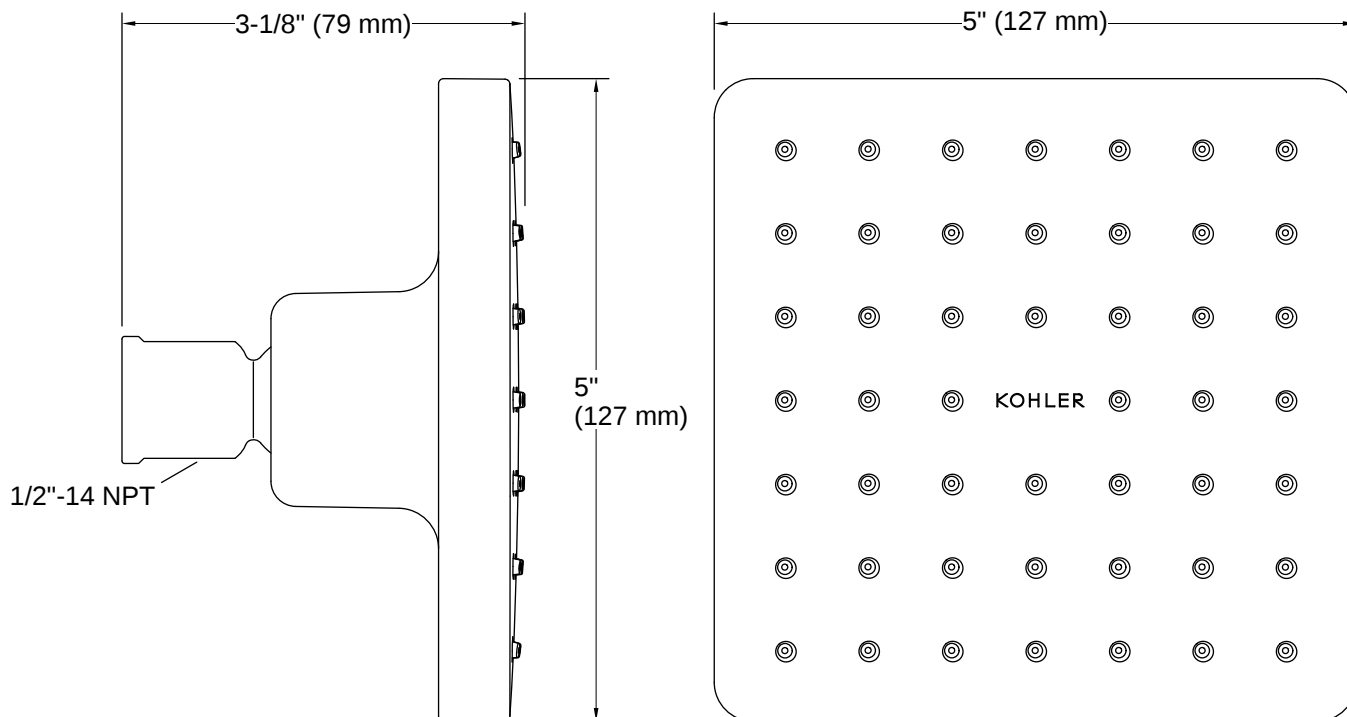

Installation

- 1/2" -14 NPT connection
- Wall-mount

Installation Notes

Install this product according to the installation instructions.



MasterShower® | K-7397

Shower arm and flange, 7-1/2" long

Features

- Metal construction
- 1/2" -14 NPT thread both ends
- Wall-mount flange



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



Codes/Standards

None Applicable

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



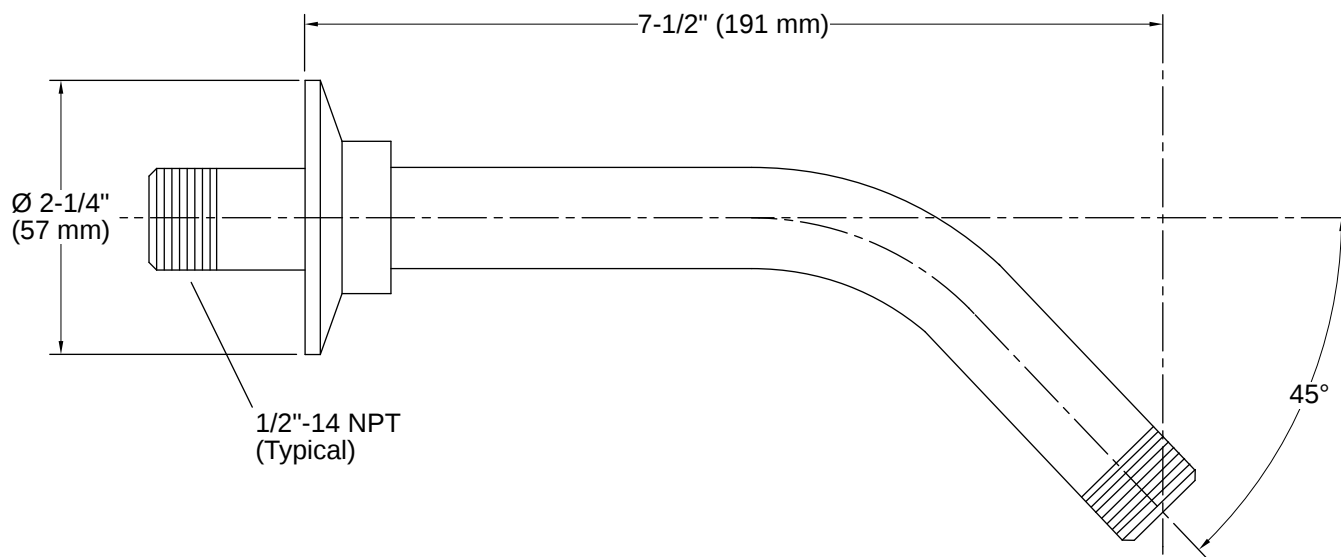

Installation Notes

Install this product according to the installation instructions.





Shift[®]+ | K-21336

Square two-function handshower, 2.5 gpm

Features

- Advanced spray engine provides two spray experiences: full coverage and targeted massage
- Full coverage spray produces an encompassing spray ideal for everyday use
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Intuitive and easy push-button activation to switch between two sprays
- Ergonomic design is comfortable and easy to grip
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate
- Contains flow-regulating check valve for backflow prevention



Available Colors/Finishes

Color tiles intended for reference only.

- AF Vibrant French Gold
- BV Vibrant Brushed Bronze
- BL Matte Black
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:2 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

OBC compliant when installed to the specific requirements of these regulations.

OBC

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
OBC

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2.5 gpm (9.5 l/min)
Flow:

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories


- K-8593 72" metal shower hose
- or
- K-9514 60" metal shower hose
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



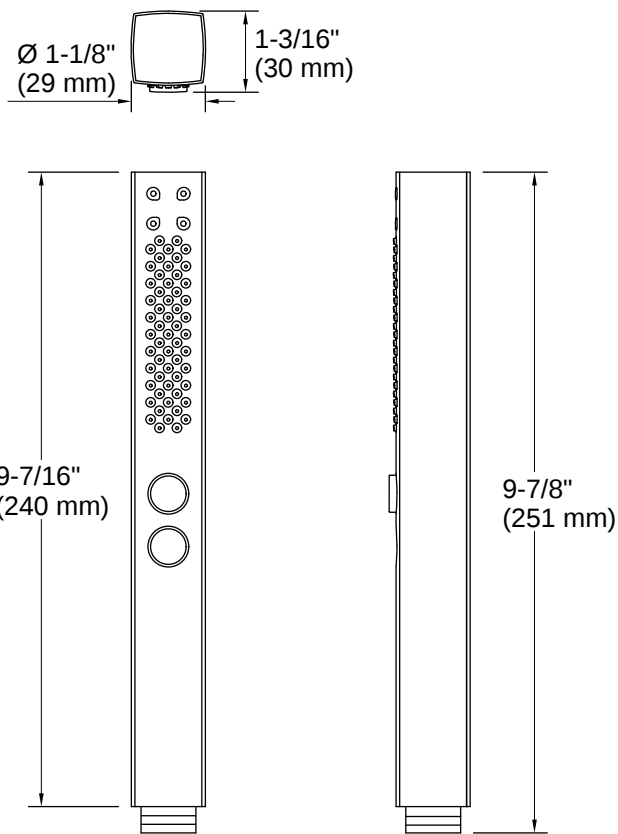

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 2.2 gal/min (8.3 l/min) or less.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.



K-8524

30" slidebar

Features

- 30" (762 mm) adjustable slidebar supports handshower at desired height for a customized showering experience



Available Colors/Finishes

Color tiles intended for reference only.

- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ASME A112.18.1/CSA B125.1

ADA

ICC/ANSI A117.1

Material

- Durable metal construction
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

1109083 Escutcheon

1032501 Escutcheon

1032502 Escutcheon

1032503 Escutcheon

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 4:30 - US-CA

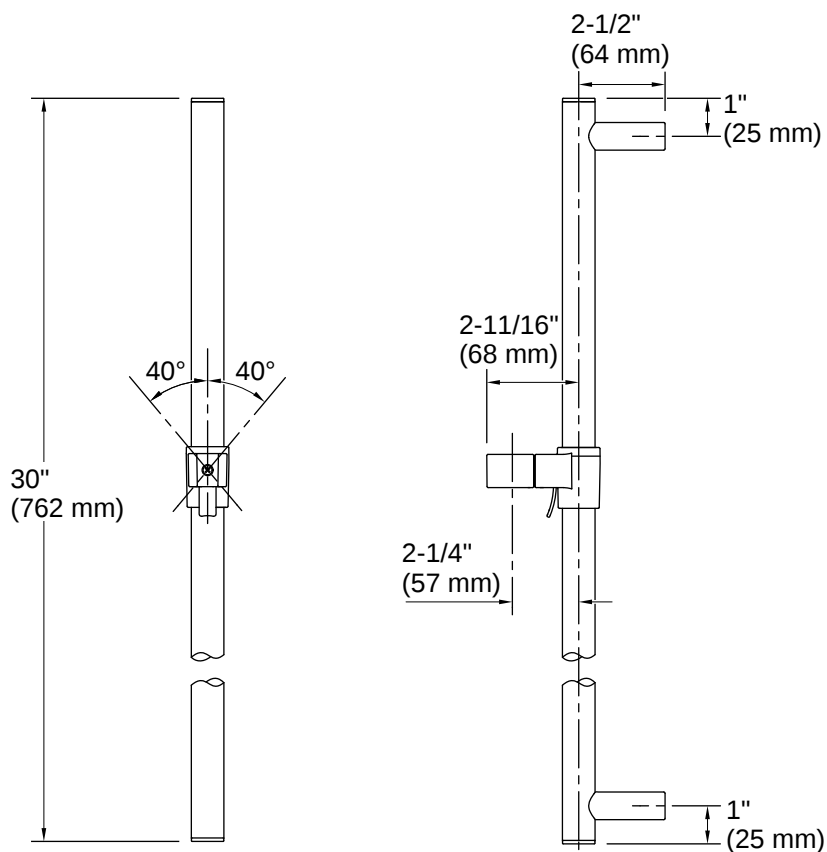

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.





Loure® | K-14790

Slidebar trim

Features

- This trim kit provides customized styling to a basic slidebar
- Available in a variety of KOHLER finishes to customize your bathroom decor beautifully
- Adds the perfect finishing touch for your shower



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 5:9 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

Material

- Solid-brass construction for durability and reliability
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-8524 30" sidebar

or

- K-9069 25" sidebar
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 5:9 - US-CA

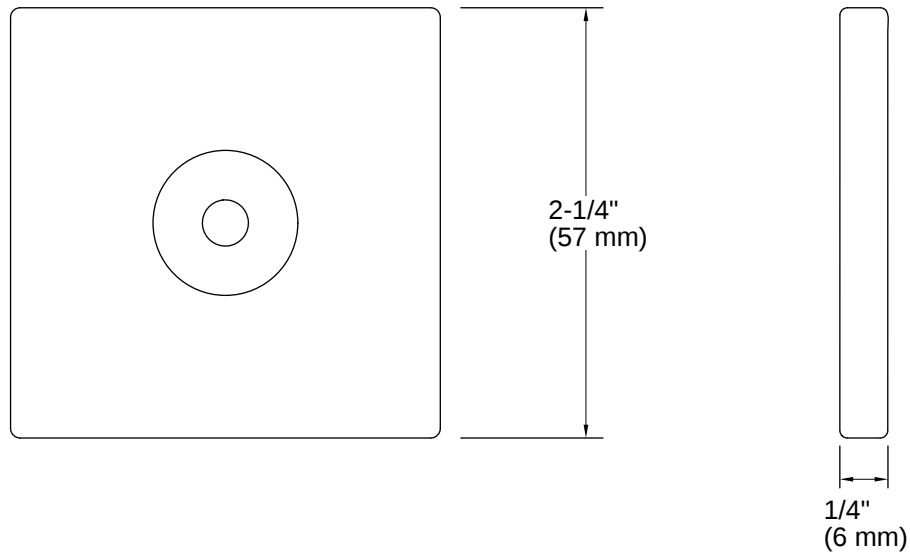

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.





MasterShower® | K-9514

60" metal shower hose

Features

- 60" (1524 mm) hose length
- Swivel base helps reach target areas
- For use with a handshower (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

- AF Vibrant French Gold
- BV Vibrant Brushed Bronze
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ADA
ICC/ANSI A117.1

Material

- Durable metal construction
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



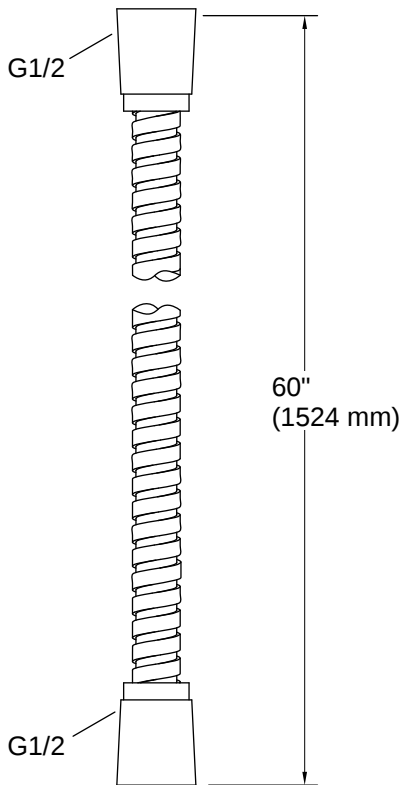

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.





Awaken® | K-98351

Wall-mount supply elbow with check valve

Features

- For use with a handshower and hose (sold separately)
- Coordinates with Awaken showerheads, handshowers and showering accessories
- Includes check valve for backflow prevention
- Metal construction



Available Colors/Finishes

Color tiles intended for reference only.

- BN Vibrant Brushed Nickel
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 11:4 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.18.1/CSA B125.1

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty


See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



Supply Adapter	A
1218069 (included)	1-13/16" – 2-5/16" (46 mm – 59 mm)
1229031*	0 – 1/2" (0 – 13 mm)
1247986*	5/16" – 13/16" (8 mm – 21 mm)
1247985*	13/16" – 1-5/16" (21 mm – 33 mm)
1247984*	1-5/16" – 1-13/16" (33 mm – 46 mm)
1218070*	2-5/16" – 2-13/16" (59 mm – 71 mm)
1218071*	2-13/16" – 3-5/16" (71 mm – 84 mm)

*Sold Separately

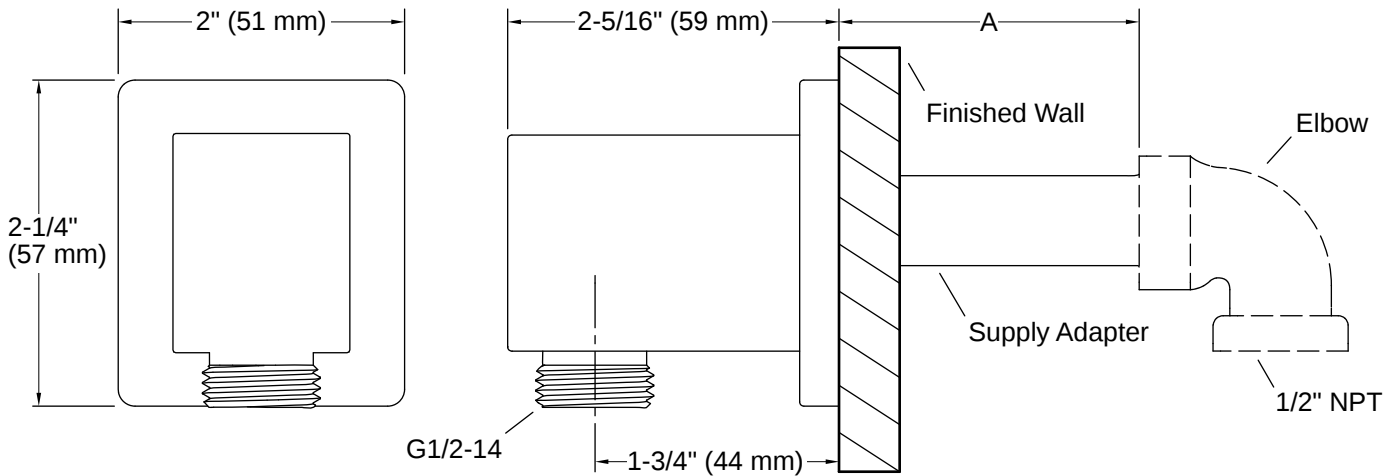

Installation

- Wall-mount
- Easy installation using slip-fit connection
- Includes 1218069 supply adapter
- May require other adapter based on installation type (sold separately)

Installation Notes

Install this product according to the installation instructions.

If dimension "A" is between 1-13/16" (46 mm) and 2-5/16" (59 mm) use the included supply adapter. For the other dimensions, order the appropriate supply adapter.



WaterTile® | K-8002

Square 54-nozzle single-function body spray, 2.5 gpm

Features

- Single-function 54-nozzle body spray delivers a soothing spray
- 2.5 gpm (9.5 lpm) maximum flow rate
- Fully adjustable sprayface pivots for targeted hydromassage
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Low-profile design complements any decor
- 1/2" NPT connection



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- BX Vibrant Brazen Bronze
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



Codes/Standards

ASME A112.18.1/CSA B125.1

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



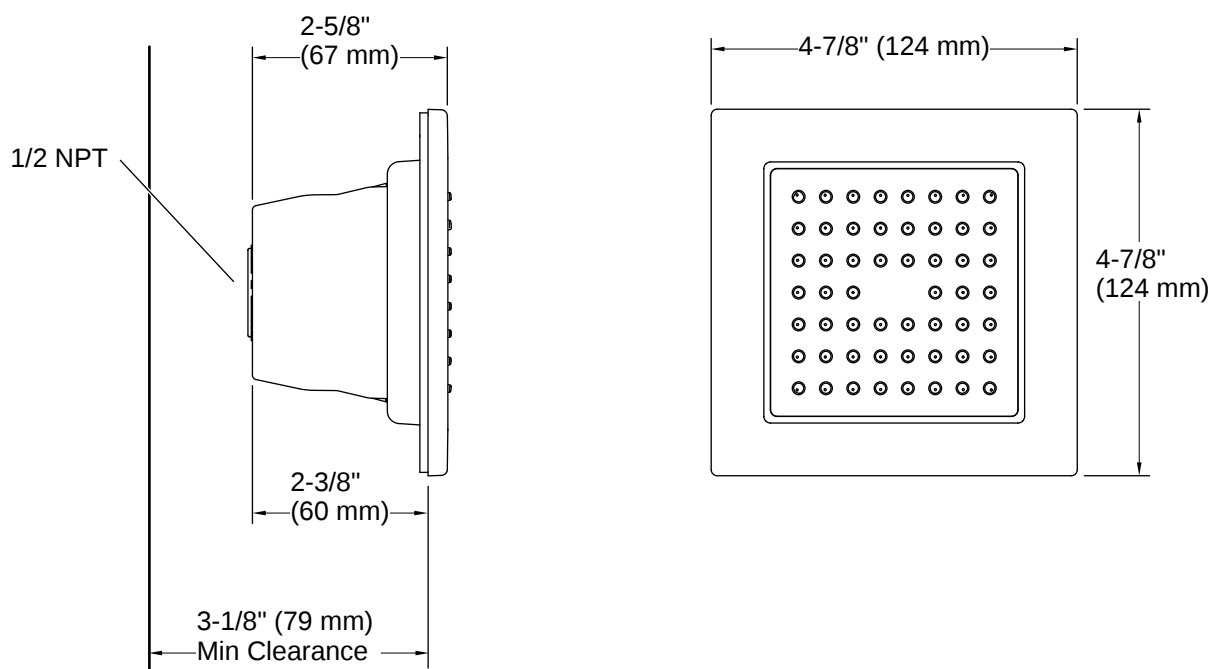

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 2.5 gal/min (9.5 l/min) or less.





Honesty® | K-26148

8" single-function rainhead, 2.5 gpm

Features

- Spray delivers a drenching rain experience
- Angled nozzles provide a full-coverage spray
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate
- Coordinates with other products in the Honesty collection
- 1/2" NPT connection



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 5:33 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 2.5 gpm (9.5 l/min)
Maximum Flow:

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



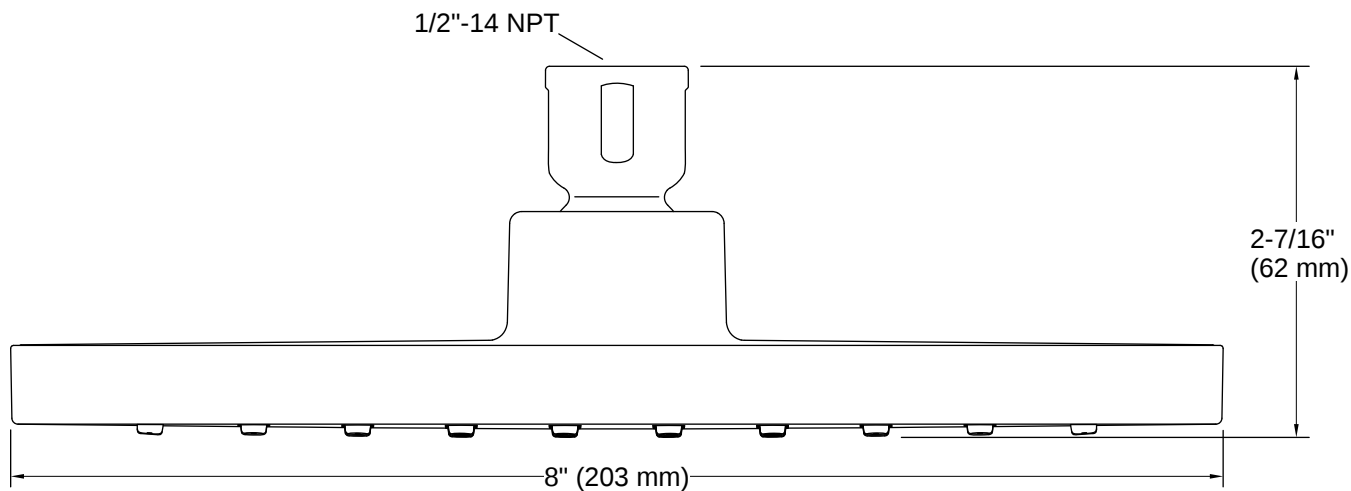

Installation

- Wall- or ceiling-mount
- Shower arm and flange sold separately

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 2.10 gal/min (7.9 l/min) or less.



K-7394

6" ceiling-mount single-function rainhead arm and flange

Features

- 1/2" NPT connection
- For use with overhead rainheads
- 6" (152 mm) shower arm



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



Codes/Standards

None Applicable

Material

- Brass
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



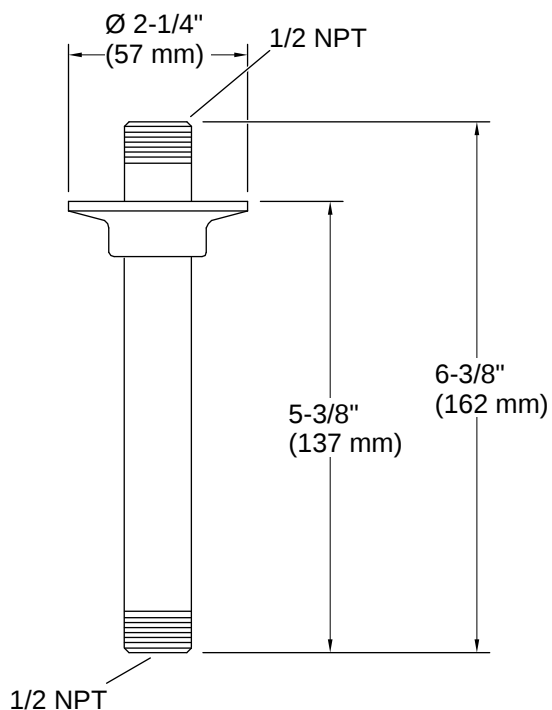

Installation

- Ceiling-mount

Installation Notes

Install this product according to the installation instructions.



Anthem+™ | K-27756

System controller module

Features

- Provides power to the digital control and manages other connected system devices
- Integrated web pages for system set up and configuration using a computer or mobile device connected via router or home network
- Automatically checks for software updates (with internet access)
- Two ports for connecting digital valve(s)
- Four ports for system component connections; four ports for Anthem+ digital control connections
- One Ethernet port for hardwire connection to home network, or connect via built-in Wi-Fi
- Features BLUETOOTH® wireless technology for pairing with optional remote on/off button (sold separately)
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- Provides connection to the KOHLER® Cloud via Wi-Fi
- One jack for power cord connection
- Provides connections for all system components, including steam



Available Colors/Finishes

Color tiles intended for reference only.

^{NA} NA Not Applicable



Codes/Standards

CSA C22.2 No. 14
CSA C22.2 No. 68
cUL Listed

Technical Information

All product dimensions are nominal.

Lighting Included: Yes

Material

- Reinforced engineering-grade thermoplastic casing
-

Connectivity




The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license.

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty



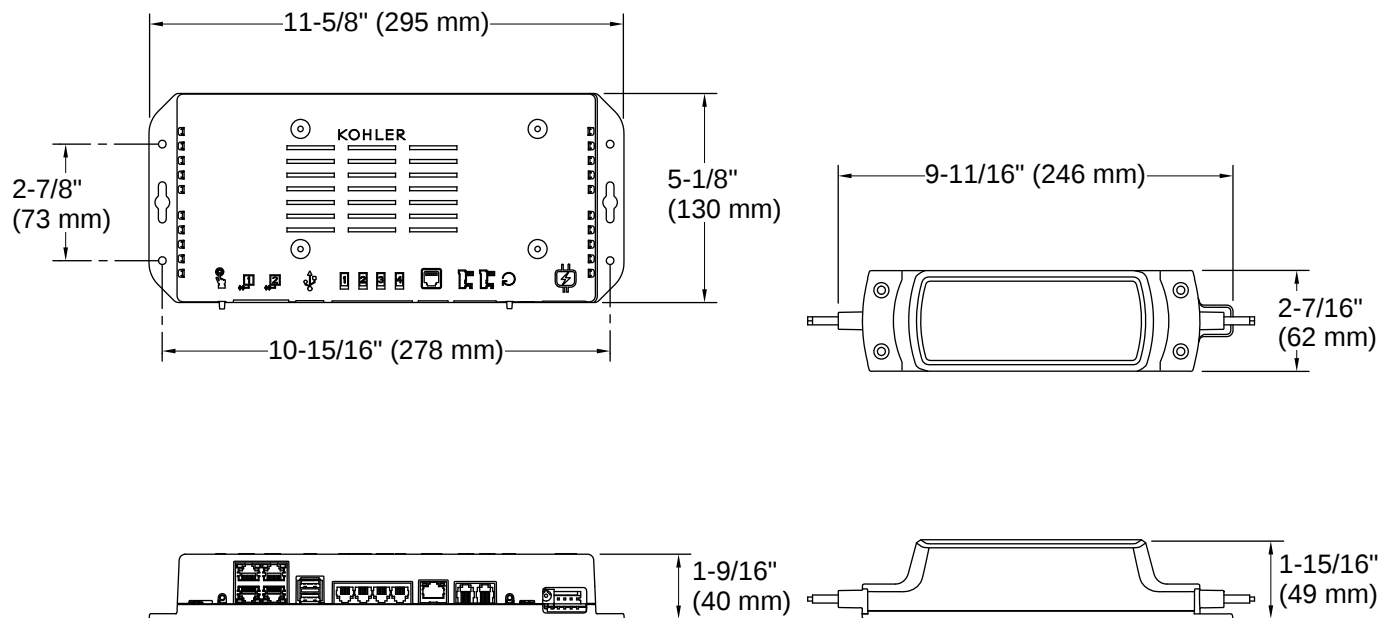

Installation

- Equipped with mounting wings for wall mounting (fittings included)
- Requires Anthem+ digital control and Anthem digital thermostatic valves (each sold separately)

Installation Notes

Install this product according to the installation instructions.

