

# Kwikset



## SMARTCODE 260™

KEYPAD ELECTRONIC LOCK

**MICROBAN**<sup>®</sup>  
ANTIMICROBIAL TECHNOLOGY

**SMARTKEY**  
SECURITY™

The SmartCode™ 260 Keypad Electronic Deadbolt offers a sleek 10-button design, Microban® Antimicrobial Technology protection and the convenience of one-touch locking. This keyless deadbolt comes in a traditional or contemporary design, which perfectly complements the Kwikset Prescott and San Clemente handlesets.

### Features

- The responsive keypad provides bright LED illumination for easy code access
- Fast motorized deadbolt with one-touch locking
- Auto-locking after 30 seconds or select custom auto-lock time delay
- Protected with Microban® Antimicrobial Technology built into the keypad and finish

### User Codes

- Up to 50 user codes for family, guests and service professionals
- Programming code for improved access code management




#1 SELLING U.S. LOCK BRAND\*

\*Source: TraQline US quarterly brand unit share report, Q4 2006 through Q2 2022

## Specifications


<b>Battery</b>	Uses 4 x AA 6V alkaline cell batteries with approximately 1 year battery life
<b>Function</b>	Single cylinder deadbolt
<b>Door Prep</b>	1 1/2" (38mm) or 2 1/8" (54mm) diameter cross bore hole and 1" diameter edge bore hole
<b>Backset</b>	Adjustable 2 3/8" (60mm) or 2 3/4" (70mm)
<b>Door Thickness</b>	1 3/8" (35mm) to 1 3/4" (44mm) standard. Thick door service part available for 2-1/4" (57mm) thick doors
<b>Faceplates</b>	1" (25 mm) x 2 1/4" (57 mm) round corner faceplate with drive-in collar standard
<b>Strikes</b>	2 3/4" (70mm) x 1 1/8" (29mm) round corner 4 hole strike
<b>Bolt</b>	1" (25mm) throw, steel bolt with anti-saw security pin
<b>Door Handing</b>	Reversible
<b>Cylinder</b>	SmartKey Security™ with 2 KW1 keys
<b>Temperature Range</b>	Exterior: -40°F to 150°F (-40°C to 66°C) Interior: 32°F to 130°F (0°C to 54°C)
<b>Humidity</b>	Exterior: 100% condensing Interior: 30% to 95% non-condensing
<b>Codes</b>	Up to 50 user codes and 10 one-time user codes with optional programming code

## Dimensions

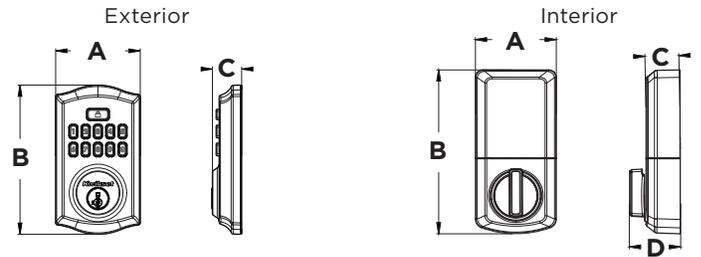

**Traditional**

Design	A	B	C	D
Exterior	2 13/16" (71 mm)	5" (127 mm)	1" (25 mm)	---
Interior	2 3/4" (70 mm)	5 1/2" (140 mm)	1 1/8" (29 mm)	1 11/16" (43 mm)

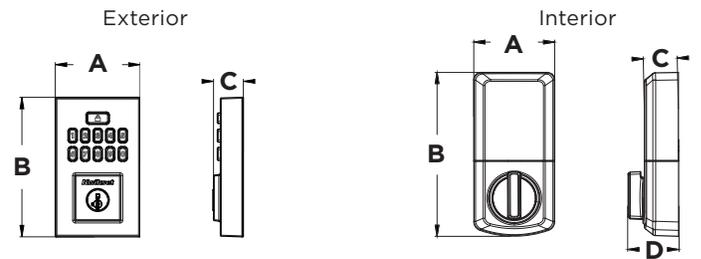

**Contemporary**

Design	A	B	C	D
Exterior	2 3/4" (70 mm)	4 9/16" (116 mm)	1" (25 mm)	---
Interior	2 3/4" (70 mm)	5 1/2" (140 mm)	1 1/8" (29 mm)	1 11/16" (43 mm)

## Easy Installation

- Replaces existing door hardware with just a Phillips screwdriver
- No hard wiring needed and fits all standard doors
- Download the free **BILT** app featuring 3D instructions for quick and easy installation

## Innovative Security

- BHMA Grade 2 certified
- 20 Minute fire rating - UL certified
- Featuring SmartKey Security™

## Finishes



**992600-001**  
Polished Brass **LOS**  
260 TRL L03



**992600-002**  
Satin Nickel **15**  
260 TRL 15



**992600-003**  
Venetian Bronze **11P**  
260 TRL 11P



**992600-004**  
Satin Nickel **15**  
260 CNT 15



**992600-005**  
Polished Chrome **26**  
260 CNT 26



**992600-006**  
Matte Black **514**  
260 CNT 514

FINISH AND  
**LIFETIME WARRANTY\***  
MECHANICAL

ONE YEAR  
ELECTRONIC WARRANTY\*

\*See kwikset.com/support/warranty for the lifetime limited mechanical and finish warranties and one-year limited electronics warranty.

\*Consulte kwikset.com/support/warranty para ver las garantías mecánicas y de acabado limitadas de por vida y la garantía limitada de un año de los electrónicos.