

OVERVIEW

Simply Conserve®'s field-adjustable commercial UFO high bay includes two switches on the unit which allow for adjustment of the input power and color temperature, offering a 9-in-1 solution. This high bay allows for easy and flexible installation in a wide variety of applications including warehouses, manufacturing facilities, gymnasiums, and other large indoor spaces. Plug-and-play sensor options are also available.

CATALOG #		TYPE
PROJECT		
COMMENTS		DATE
PREPARED BY		

KEY FEATURES

- Field-adjustable lumen and CCT
- Die-cast aluminum housing and polycarbonate lens
- Wet-location, IP65-rated
- L70-rated lifetime of more than 50,000 hours
- 0-10V dimmable, 1.5-ft cord for dimming, 6-ft cord for line voltage
- Twist-lock sensor options available with no re-wiring
- Hook mount standard



FIELD ADJUSTABLE



EASY TO INSTALL



50,000 HOURS



WET-RATED

ORDERING INFORMATION


SOURCE	WATTAGE	FIXTURE TYPE	CCT	VOLTAGE	INC. OPTIONS
L = LED	100/200 = 100W, 150W, 200W	HBU = High Bay, UFO	35/50 = 3500K, 4000K, 5000K	120/277 = 120-277V	D = 0-10V Dimming ADJ = Field-Adjustable 12GP = 12th Generation, Pro Design

SPECIFICATIONS


CATALOG #	WATTS	CCT	LUMENS	EFFICACY	CRI	VOLTAGE	DIM
L100/200-HBU-35/50-120/277-D-ADJ-12GP	100W/150W/200W	3500K/4000K/5000K	13500/20250/27000	135 LPW	≥80	120-277V	0-10V

DIMENSIONS

PRODUCT

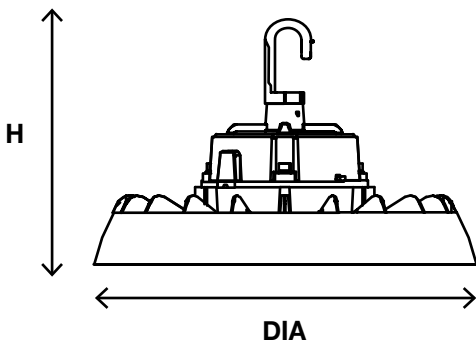

CASE

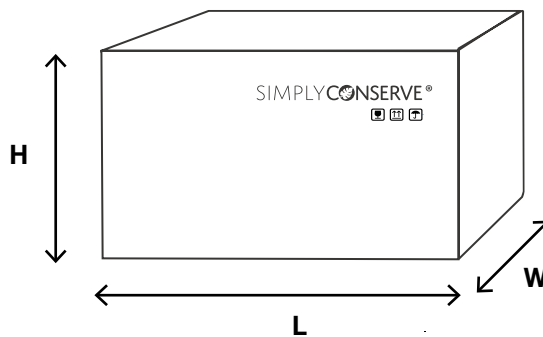

MODEL #	DIA	H
L100/200-HBU-35/50-120/277-D-ADJ-12GP	11.8"	7.2"

MODEL #	L	W	H	CASE QTY.	GROSS WT.
L100/200-HBU-35/50-120/277-D-ADJ-12GP	14.5"	14.5"	7.0"	1	7.2 lbs.

5-Year Limited Warranty



AM Conservation® warrants this product to be free from manufacturing defects for a period of five years from the date of consumer purchase or distribution by an energy conservation program, and has been properly installed, AM Conservation will replace the adjustable LED UFO high bay free of charge.

For warranty claims, please contact:

customer@amconservation.com

To learn more, please visit:

www.amconservation.com