


Model: LED160

LEDme® Track / Rail Luminaire

WAC LIGHTING

Responsible Lighting®

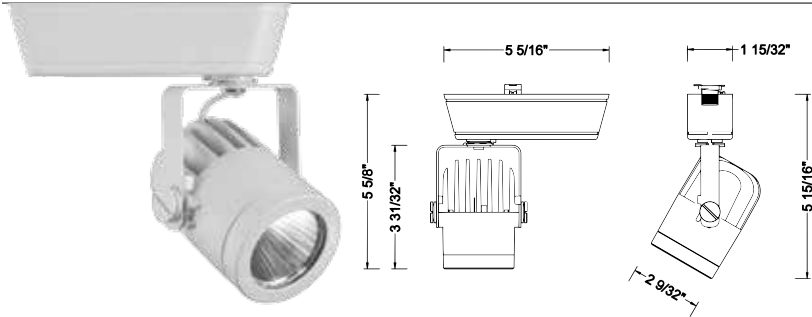

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

LED160 track spot offers superior light output in a small, unobtrusive design. The high output LEDs outperform a 20W metal halide fixture at the size of a typical MR16 luminaire. Developed for upscale residential and commercial environments.

FEATURES

- Free of projected heat and UV and IR radiation
- Alternate beam angles may be ordered separately
- Replaceable LED modules
- Accommodates 1 lens or honeycomb
- 360° horizontal and -90°~+90° vertical aiming
- Lockable vertical aiming for precise adjustments
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum with removable lens cap for easy change of lenses or accessories

Finish: Black (BK) and White (WT) powder coat paint.

Driver: Input voltage: 120V AC 50/60Hz.

Light Source: High-Output LED.

Dimming: Dimmable to 10% with electronic low voltage (ELV) dimmer and triac dimmer.


Standards: ETL & cETL Listed.

FIXTURE PERFORMANCE

Model #	Beam	Voltage	Color Temp	Power	Lumens	Efficacy	CRI
LED160S-827	20°	120V	2700K	15W	935	62.3 Lm/W	85
LED160F-827	40°				930	62 Lm/W	
LED160S-927	20°	120V	2700K	15W	775	53 Lm/W	90
LED160F-927	40°				760	50.5 Lm/W	
LED160S-830	20°	120V	3000K	15W	955	63.5 Lm/W	85
LED160F-830	40°				945	63 Lm/W	
LED160S-930	20°	120V	3000K	15W	765	51 Lm/W	90
LED160F-930	40°				750	50 Lm/W	
LED160S-835	20°	120V	3500K	15W	960	64 Lm/W	85
LED160F-835	40°				950	63.5 Lm/W	
LED160S-840	20°	120V	4000K	15W	975	65 Lm/W	85
LED160F-840	40°				970	64.5 Lm/W	

ORDER NUMBER

Track System	Model	Watt	Beam	Color Temp	CRI	Finish
H H Track	LED160	15W	S 20°	827 2700K	85	BK Black WT White
L L Track				927 2700K	90	
J J/J2 Track			F 40°	930 3000K	90	
				835 3500K	85	
			S 20°	840 4000K	85	
				F 40°		



Example: J-LED160S-827-WT

FINISHES



REPLACEMENT MODULE

BXRC-27E1000-B-03	2700K	85 CRI
BXRC-27G1000-B-03	2700K	90 CRI
BXRC-30E1000-B-03	3000K	85 CRI
BXRC-30G1000-B-03	3000K	90 CRI
BXRC-35E1000-B-03	3500K	85 CRI
BXRC-10E1000-B-03	4000K	85 CRI

INTERCHANGABLE OPTICS

RF-S	20°
RF-F	40°

LENSES & ACCESSORIES

Model	Color	Model	Finish	
LENS-16	AMB Amber	FR	Frosted Lens	
	BLU Blue		SPR	Spread Lens
	GRN Green		BEL	Beam Elongating Lens
	RED Red		HCL	Honey Comb Louver
	YEL Yellow			

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585