


1/3 HP INDUSTRIAL GRADE FAN COMPONENTS

OUR INDUSTRIAL GRADE FAN COMPONENTS ALLOW THE FREEDOM TO CUSTOMIZE YOUR NEED AND REDUCE YOUR ASSEMBLY TIME AND COST.




ASSEMBLED HEAD
9170H, 9175H



ASSEMBLED HEAD
9171H, 9174H

PRODUCT INFORMATION

Motor	3-speed, 1/3 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor
Controls	Rear mounted pull cord switch
Power Cord	Black, 10', 3-conductor, SJT type
Coating	Blade, Guard, and Mounts are Powder coated steel
Compliances	UL, OSHA
Oscillation	90° (models 9174H, 9175H)

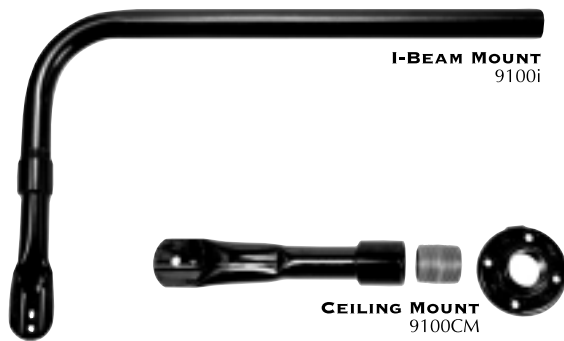


I-BEAM MOUNT
9100i

CEILING MOUNT
9100CM



WALL MOUNT
9100WC

WHEEL KIT
9100WB

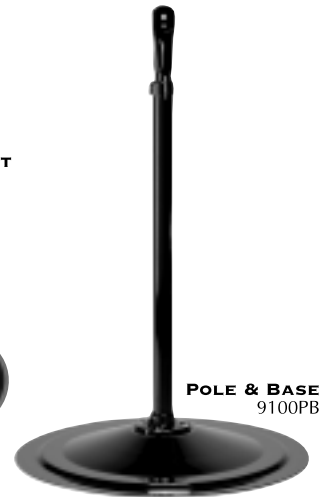

POLE & BASE
9100PB

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9170H	30" Assembled Head	30"	33 1/2"L x 17 1/2"W x 33 1/4"H	53.7	10.56	\$330.00
9175H	30" Assembled Oscillating Head		33 1/2"L x 17 1/2"W x 33 1/4"H	56.3	10.56	\$435.00
9171H	24" Assembled Head	24"	27"L x 17 1/2"W x 27"H	47.2	6.96	\$310.00
9174H	24" Assembled Oscillating Head		27"L x 17 1/2"W x 27"H	46.8	6.96	\$392.00
9100PB	Pedestal Pole & Base	N/A	30"L x 30"W x 42 1/2"H	31.4	1.04	\$120.00
9100WC	Wall Mounting Bracket	N/A	13"L x 2"W x 12 1/2"H	5.3	.19	\$43.00
9100CM	Ceiling Mounting Bracket	N/A	4 1/2"L x 4 1/2"W x 15"H	3.6	.28	\$50.00
9100i	I-Beam Mounting Bracket	N/A	32 1/4"L x 2"W x 21"H	9.8	.78	\$113.00
9100WB	Pedestal Wheel Kit (4" diameter)	N/A	4"L x 4"W x 9"H	2.2	.36	\$45.00

PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/3 HP ¹	8780	7480	5570	1075	925	800	2.5	2.0	1.65	308	205	170	72	70	64
24" 1/3 HP ²	5770	5250	4270	1054	869	673	2.8	1.96	1.40	332	226	152	69	67	59

¹ Includes models 9170H, 9175H • ² Includes models 9171H, 9174H

Performance ratings are conducted in accordance with AMCA standard 230-99. • Specifications are subject to change.