



2 x 250 Watt Heat Lamp 120 Volts, 4.0 amps, 60 hz.

GRILL

White, polymeric grill (flame retardant ABS UL rated 94-5V) secured in place with torsion springs; easily removed if necessary, dimensions - 161/2"x10".

HEATER HOUSING

23 gauge galvanized steel housing, dimensions 137/8"x8"x57/8".

LAMPING INFORMATION


2 x 250 watt maximum, type R40 bulb, medium base, 1700 BTU heating.

► UNIT MOUNTING

Rated Type IC for ceilings insulated to R-40. Designed to mount in ceilings with at least 6" of clearance. The unit is centered between joists (with 16" centers) using hanging brackets. The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 1315/16"x81/16".

SINGLE PACK SHIPPING INFO

- ➤ Box Dim 12¹/₂"x16³/₄"x8"
- ➤ UPC 0-8316227031-3
- ➤ Shipping Weight 8 lbs.

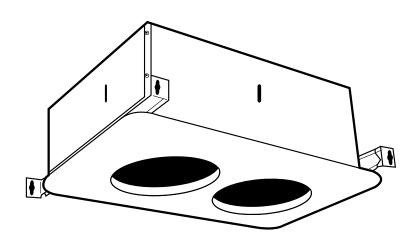

TYPE IC RATED

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY		DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 1-877-304-3785

Fax: (610) 696-4648

Canada: 110 Glidden Road Brampton, Ontario L6T 2J3 Tel: (905) 456-2033

Fax: (905) 456-1015