American Tandard

TOWNSEND® 38" x 38" **ADA SHOWER BASE** SOLID SURFACE

BARRIER FREE

TOWNSEND[®] 38" x 38" (36" x 36" Clear) ADA SOLID SURFACE SHOWER BASE

3838AMFCOL Barrier Free Front Center Drain with Trench Cover

Product Features:

- Durable 100% solid, non-porous material
- Smooth matte surface
- Integral 3-sided 1" tiling / water retention flange for easy installation
- Repairable and renewable surface
- Fungi and bacterial resistant
- Self-extinguishing
- UV resistant
- · Resistant to stains and impact
- Easy maintenance and cleaning
- ADA Compliant when installed according to ADA guidelines
- Drain not included

Nominal Dimensions:

38" x 38" x 1-3/8" (965 x 965 x 34mm)

Shower Base Includes:

 Removable Brushed Stainless Steel trench drain cover

Compliance Certifications -Meets or Exceeds the Following Specifications:

- CSA B45.5 / IAPMO Z124
- IAPMO R&T cUPC
- ICC A117.1

Class A rating per ASTM E84 tunnel test

	<u>Flame</u>	<u>Smoke</u>
ASTM E84-17a	0 (Zero)	20

• Tested against CAN/L	JLC S102.2-10	
-	<u>Flame</u>	<u>Smoke</u>
CAN/ULC S102.2-10	0 (Zero)	15



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.






SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS



3838AMFCOL Barrier Free Front Center Drain with Trench Cover

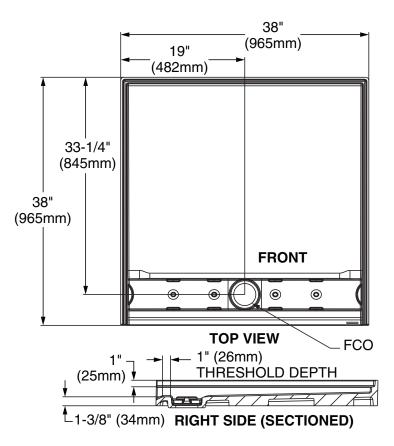

GENERAL SPECIFICATIONS FOR 3838AM SHOWER BASE		
INSTALLED SIZE	965mm x 965mm	
	(38 x 38 ln.)	
WEIGHT	39.7 Kg. (87 Lbs.)	
SHOWER WELL AT SUMP	901mm x 902mm (35-1/2 x 35-1/2 ln.)	
SHOWER WELL AT RIM	924mm x 914mm (36-3/8 x 36 ln.)	
FLOOR LOADING (PROJECTED AREA)	43 Kgs/Sq. m. (9 Lbs./Sq. Ft.)	