American Standard

Style That Works Better

EVOLUTION™ 2 RIGHT HEIGHT™ ELONGATED TOILET

2428.012

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- 16-1/2" rim height for accessible applications
- 305mm (12") rough-in
- · Elongated siphon action bowl with direct-fed jet
- Fully glazed 2" Trapway
- Generous 9" x 8" water surface area
- Pilot Valve Water Control
- 2" Flapper flush valve
- · Color-matched trip lever
- · Sanitary bar on bowl
- 2 color-matched bolt caps
- 100% factory flush tested
- 2 Year Limited Warranty on Total Toilet

3068.016 Bowl

4061.016 Tank

Nominal Dimensions:

755 x 456 x 760mm (29-3/4" x 18" x 29-7/8")

Fixture only, seat and supply by others

Alternate Tank Configurations Available:

- **4061.500** Tank complete with Aquagard liner
- □ 4061.800 Tank complete with tank lever located on right side

Compliance Certifications -

Meets or Exceeds the Following Specifications: • ASME A112.19.2-2008/CSA B45.1-08

- ASME ATT2.19.2-2008/CSA B45.1-08
- Los Angeles Department of Water and Power Supplementary Purchase Specification for Non-Adjustability


To Be Specified:

- □ Color: □ White □ Bone □ Linen
- Seat: American Standard #5324.019 "Rise and Shine" solid plastic closed front seat with cover.
- Seat: American Standard #5311.012 "Laurel" molded closed front seat with cover.
- ❑ Seat: American Standard #5321.110 EverClean™ Elongated Seat with Cover and Slow Close Snap-Off hinges
- Alternate Seat:
- □ Supply with stop:



EVOLUTION™ 2 RIGHT HEIGHT™

ELONGATED TOILET

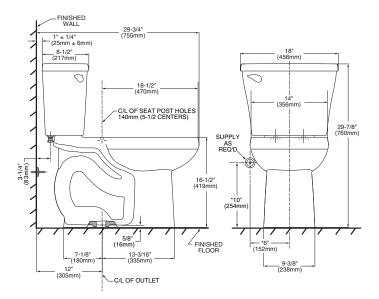

NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.