TWO-HANDLE MINISPREAD LAVATORY FAUCET WITH BRASS SPOUT


Style That Works Better



MODEL NUMBER:

☐ 6028.240 Dazzle Mini-spread

Metal Speed Connect® Pop-up drain. Metal Lever handles.

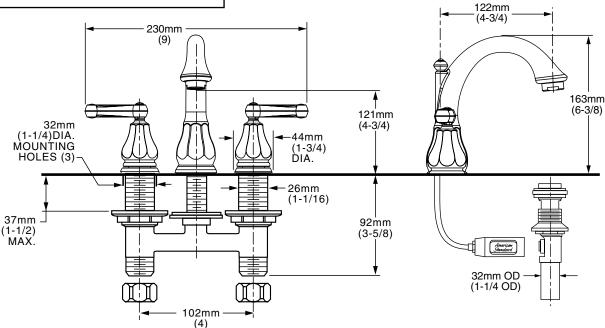

GENERAL DESCRIPTION:

One-piece cast brass valve body on 4" centers. 1/4 turn washerless ceramic disc valve cartridges. One-half inch brass male inlet shanks. Cast brass spout. 20 inch (500mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect® drain body with 1-1/4 inch (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Brass Construction: Durable. Ideal for prolonged contact with water.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Exclusive Speed Connect Metal Drain:

- Fewer Parts installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Choice of Finishes: Available in choice of Polished Chrome, Blackened Bronze (PVD) or Satin Nickel (PVD).

SUGGESTED SPECIFICATION:

Two handle minispread lavatory faucet shall feature a one-piece cast brass valve body. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 6028.240.____.




DAZZLE

TWO-HANDLE MINISPREAD LAVATORY FAUCET WITH BRASS SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B 125 NSF 61/Section 9



		Finish Options		
Product Number	Description	Polished Chrome	PVD Blackened Bronze	PVD Satin Nickel
		002	068	295
6028.240	DazzleMini-spread with Metal Speed Connect® Pop-up drain. Metal lever handles.			

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.