American Standard

Style That Works Better

T375.128 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

<u>TRIM KIT</u>

FloWise water saving showerhead offers 40% water savings at maximum 1.5gpm/5.7L/min. flow rate. Slip-on diverter spout. Available with lever or metal lever handle. Available in Bath/Shower and Shower Only combinations.

ROUGH VALVE BODY

Cast brass body, washerless ceramic disc valve cartridge with back to back capability, and hot limit safety stop. Cycles from "off" to "cold" to "hot". Pressure balancing cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressure. 1/2" inlets and outlets (choice of direct sweat, threaded, or PEX). Available with screwdriver stops. Rough-in plaster guard designed for use as thin-wall mounting adaptor.

COLONY PRESSURE BALANCE BATH/SHOWER FITTING WITH FloWise® SHOWERHEAD

MODEL NUMBER:

TRIM KITS:

- T375.128 Colony BATH/SHOWER Trim Kit Lever Handle. FloWise Showerhead. LESS Valve Body.
- T375.248 Colony BATH/SHOWER Trim Kit Metal Lever Handle. FloWise Showerhead. LESS Valve Body.
- T372.128 Colony SHOWER ONLY Trim Kit Lever Handle. FloWise Showerhead. LESS Valve Body.
- T372.248 Colony SHOWER ONLY Trim Kit Metal Lever Handle. FloWise Showerhead. LESS Valve Body.

ROUGH VALVES:

- R110 Pressure Balance Rough Valve Body only Direct sweat inlets/outlets. LESS trim.
- R110SS Pressure Balance Rough Valve Body only with Screwdriver stops Direct sweat inlets/outlets. Screwdriver stops. LESS trim.
- R115 Pressure Balance Rough Valve Body only Female thread inlets/outlets. LESS trim.
- R115SS Pressure Balance Rough Valve Body only with Screwdriver stops Female thread inlets/outlets. Screwdriver stops. LESS trim.
- □ R117 Pressure Balance Rough Valve Body only PEX inlets/Direct sweat outlets. LESS trim.
- □ R117SS Pressure Balance Rough Valve Body only with Screwdriver stops PEX inlets/Direct sweat outlets. Screwdriver stops. LESS trim.

PRODUCT FEATURES:

Flowise Water Saving Showerhead: Saves up to 40% in water usage. Max. 1.5gpm/5.7L/min. flow rate.

Cast Brass Valve Body: Durable - Quality that will last a lifetime. Ideal material for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance. Allows easy fine tuning of temperature (125°handle rotation from off to hot).

Pressure Balancing Valve Cartridge: Maintains constant output temperature in response to changes in hot and cold supply pressure. Diaphragm system engineered to eliminate cross flow. Avoids failure due to mineral deposits - ideal for use in hard water.

Back-to-Back Capability: Hot and cold can be reversed quickly and easily.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Plaster Guard: Plaster guard is designed to protect valve during installation and serve as a mounting plate for thin-wall installations. 2 piece design allows valve to be tested prior to trim installation.


Wide Rough-in Range: From 1-5/8" to 3-1/4".

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature water saving showerhead with Max. 1.5gpm/5.7L/min. flow rate. Shall feature a cast brass body. Shall feature ceramic disc valve cartridge which is capable of back-to-back installation. Fitting shall be equipped with pressure balancing cartridge engineered to eliminate cross flow and avoid failure due to mineral deposits. Shall also feature hot limit safety stop. Fitting shall be: Rough Valve Body - American Standard Model # R11____, Trim Kit - American Standard Model # T37_.____.

Imerican Standard Style That Works Better

COLONY PRESSURE BALANCE BATH/SHOWER FITTING WITH FloWise[®] SHOWERHEAD

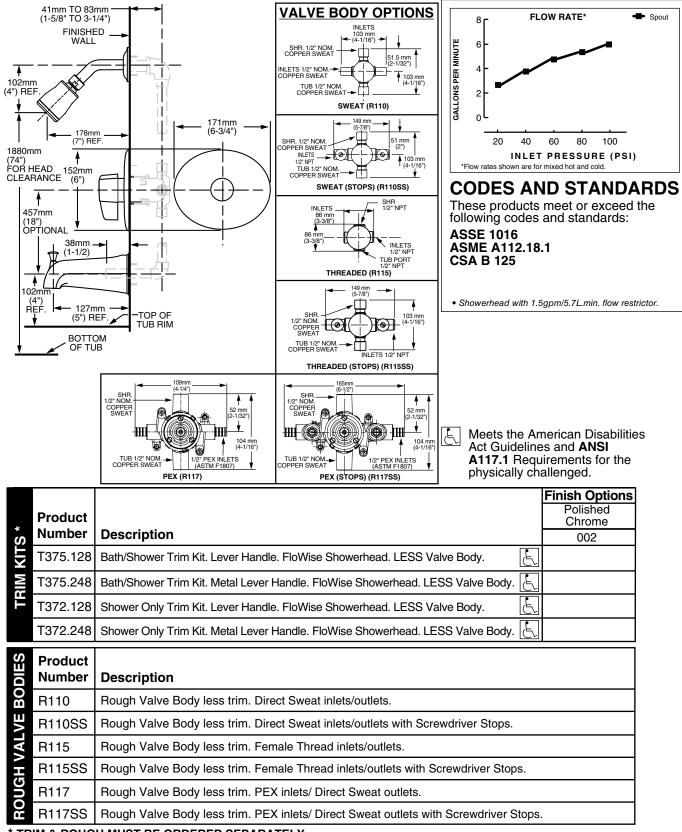


TRIM & ROUGH MUST BE ORDERED SEPARATELY.

American Standard

UPGRADABLE PRESSURE BALANCE BATH/SHOWER FITTING

TEMPERATURE CONTROL VALVE

Style That Works Better



R110 Valve Body Shown

GENERAL DESCRIPTION:

Cast brass body, washerless ceramic disc valve cartridge with back-to-back capability and hot limit safety stop. Cycles from "off" to "cold" to "hot". Pressure balancing cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressure. One-half inch inlets and outlets (choice of direct sweat, threaded, or PEX). Available with screwdriver stops. Rough-in plaster guard designed for use as thin-wall mounting adaptor. Valve body will accept a variety of decorative Bath/Shower trims.

PRODUCT FEATURES:

Cast Brass Valve Body: Durable - Quality that will last a lifetime. Ideal material for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance. Allows easy fine tuning of temperature (125° handle rotation from off to hot).

Pressure Balancing Valve Cartridge: Maintains constant output temperature in response to changes in hot and cold supply pressure. Diaphragm system engineered to eliminate cross flow. Avoids failure due to mineral deposits - ideal for use in hard water

Back-to-Back Capability: Hot and cold can be reversed quickly and easily.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Plaster Guard: Plaster guard is designed to protect valve during installation and serve as a mounting plate for thin-wall installations. 2 piece design allows valve to be tested prior to trim installation.

Wide Rough-in Range: From 1-5/8" to 3-1/4".


SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature a cast brass body. Shall feature ceramic disc valve cartridge which is capable of back-to-back installation. Fitting shall be equipped with pressure balancing cartridge engineered to eliminate cross flow and avoid failure due to mineral deposits. Shall also feature hot limit safety stop. Fitting shall be: Rough Valve Body - American Standard Model # Trim Kit - American Standard Model # R11

MODEL NUMBER:

- R110 Pressure Balance Rough Valve Body only Direct sweat inlets/outlets. LESS trim.
- R110SS Pressure Balance Rough Valve Body only with Screwdriver stops Direct sweat inlets/outlets. Screwdriver stops. LESS trim.
- R115 Pressure Balance Rough Valve Body only Female thread inlets/outlets. LESS trim.
- **R115SS Pressure Balance Rough Valve Body only** with Screwdriver stops Female thread inlets/outlets. Screwdriver stops. LESS trim.
- **R117 Pressure Balance Rough Valve Body only** PEX inlets/Direct sweat outlets. LESS trim.
- **R117SS Pressure Balance Rough Valve Body only** with Screwdriver stops PEX inlets/Direct sweat outlets. Screwdriver stops. LESS trim.

See reverse for available trim kits.

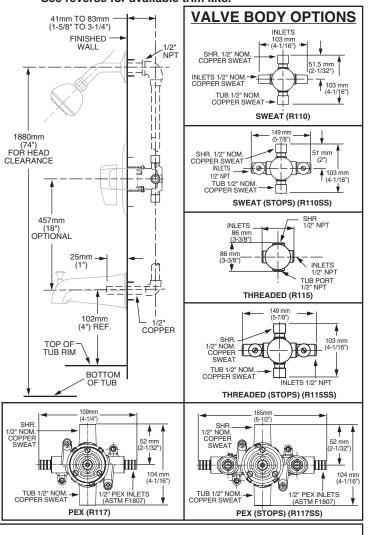


American Standard

UPGRADABLE

Style That Works Better

PRESSURE BALANCE BATH/SHOWER FITTING

TEMPERATURE CONTROL VALVE

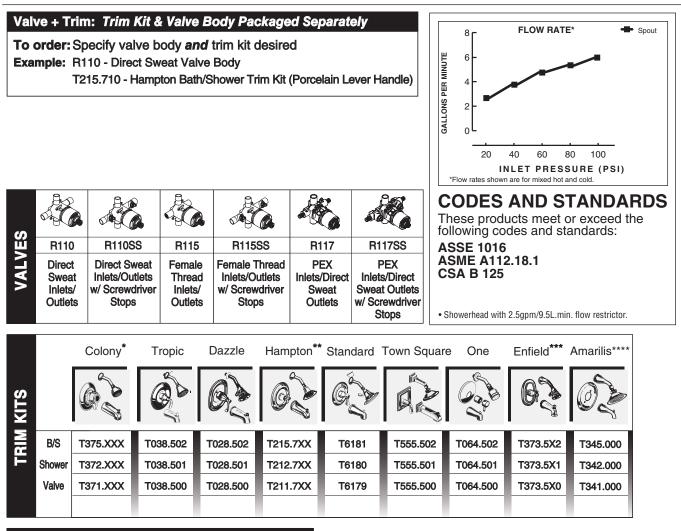

NOT	ES:						
* COLONY with 2.5 showerhead				with FloWise [®] showerhead			
Q	Lever Handle 120		Metal ver Handle 240	Ŷ	Lever Handle 128	🧳 Le	Metal ver Handle 248
** HAMPTON available with choice of three handles. to order: specify the three digit handle number ex) T211.710 (valve only trim kit w/ porcelain lever handle)							
B	Porcelain Lever 710	Ĩ	Metal Cross 720	B	Metal Lever 730		
*** ENFIELD available with lever or cross handle							
	Lever Handle 500	<u> A</u> g	Cross Handle 520				
**** AMARILIS trim kits are less handlesmust be ordered separately. the following handle kits are available:							
Ŕ	Metal Cross 551	-B	Metal Lever 441	A	Metal Lever 541	B	Perfume Bottle 431
9	Lexington 901						

© 2008 AS America Inc.

American Standard

TRIM KITS FOR TEMPERATURE CONTROL VALVES

Style That Works Better

Trim Kits for R110, R110SS, R115, R115SS, R117, R117SS rough valve bodies. Showerhead with 2.5gpm/9.5L/min. maximum flow. TRIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.

TRIM KITS ONLY. VALVE MUST BE ORDERED SEPA Model #			
Trim Kit	Description	Finishes	Roughing-In Dimensions
COLONY	T375.120 BATH/SHOWER Trim Kit • Wall escutcheon • Lever handle • "Easy Clean" Showerhead • Shower arm and flange • Slip-on Diverter tub spout	.002 Polished Chrome	FINISHED WALL 102mm (1*5/8* TO 3*1/4*)
	T375.240 SAME AS ABOVE • With Metal lever handle		173mm (7) REF. → ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓
	T372.120 SHOWER ONLY Trim Kit • Wall escutcheon • Lever handle • "Easy Clean" Showerhead • Shower arm and flange		1880mm (74) HEAD COLARANCE 457mm (18) OPTIONAL
	• With Metal lever handle		38mm + -
V	T371.120 VALVE ONLY Trim Kit • Wall escutcheon • Lever handle		(5) REF.→ TUB RIM
E	T371.240 SAME AS ABOVEWith Metal lever handle		BOTTOM OF TUB
COLONY WITH FLOWISE	T375.128 BATH/SHOWER Trim Kit • Wall escutcheon • Lever handle • Water Saving FloWise [®] Showerhead • Angle adjustable • Showerhead, arm and flange • Diverter tub spout • Less valve	.002 Polished Chrome	41mm TO 83mm (1-5/8' TO 3-1/4') WALL 102mm (4') REF.
	T375.248 SAME AS ABOVE • Metal Lever handle T372.128 BATH/SHOWER Trim Kit • Wall escutcheon • Lever handle • Water Saving FloWise [®] Showerhead • Angle adjustable • Showerhead, arm and flange • Less valve		1880mm (74') FOR HEAD CLEARANCE 457mm 0PTIONAL (1-12) (
E	T372.248 SAME AS ABOVE • Metal Lever handle		(5') REF. BOTTOM OF TUB
ТВОРІС	T038.502 BATH/SHOWER Trim Kit • Metal Lever handle • Brass wall escutcheon • Showerhead, arm and flange • Slip-on Diverter tub spout	.002 Polished Chrome .295 Satin Nickel (PVD)	FINISHED WALL FINISHED WALL 100mm (4-1/4) REF. 152mm
	T038.501 SHOWER ONLY Trim Kit • Metal Lever handle • Brass wall escutcheon • Showerhead, arm and flange	.002 Polished Chrome .295 Satin Nickel (PVD)	74' FOR HEAD CLEARANCE
	T038.500 SHOWER ONLY Trim Kit • Metal Lever handle • Brass wall escutcheon	.002 Polished Chrome .295 Satin Nickel (PVD)	457mm OPTIONAL 1(1) 0PTIONAL (15) (1-1/2) 194mm (75/8) (75/8) 102mm (4) (4) (4) (4)
			BOTTOM OF TUB

American Standard

TRIM KITS FOR TEMPERATURE CONTROL VALVES

Style That Works Better

Trim Kits for R110, R110SS, R115, R115SS, R010, R015, R117, R117SS rough valve bodies. Showerhead with 2.5gpm/9.5L/min. maximum flow. TRIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.

Trim Kit	Model # Description	Finishes	Roughing-In Dimensions
	Description	FIIIISHES	Roughing-in Dimensions
HAMPTON Color Colo	 T215.7XX BATH/SHOWER Trim Kit Brass wall escutcheon Adjustable brass Showerhead Shower arm and flange Slip-on diverter tub spout T212.7XX SHOWER ONLY Trim Kit Brass wall escutcheon Adjustable brass Showerhead Shower arm and flange T211.7XX VALVE ONLY Trim Kit Brass wall escutcheon 	 Porcelain Lever, Metal Cross Handle Finishes .002 Polished Chrome .099 Polished Brass (PVD) .295 Satin Nickel (PVD) Metal Lever Handle Finishes .002 Polished Chrome .068 Blackened Bronze (PVD) .099 Polished Brass (PVD) .221 Satin (PVD)/Pol. Chrome mix. .295 Satin Nickel (PVD) .297 Satin/Brass (PVD) mix. .299 Pol. Chrome/Brass (PVD) mix. 	178 mm REF. FINSHED WALL FINSHED WALL 127 mm REF. (2.1/4 - 3-1/4) (2.1/4 - 3-1/4) (3.1/4) (3.1/4) (3.1/4) (3.1/4) (4.1/4) (4.1/4) (5.1/8) (5.1/8) (7.5/8
DAZZLE	 T028.502 BATH/SHOWER Trim Kit Metal Lever Handle Brass wall escutcheon Showerhead, arm and flange Slip-on diverter tub spout T028.501 SHOWER ONLY Trim Kit Metal Lever Handle Brass wall escutcheon Showerhead, arm and flange T028.500 VALVE ONLY Trim Kit Metal Lever Handle Brass wall escutcheon Showerhead, arm and flange 	 .002 Polished Chrome .068 Blackened Bronze (PVD) .295 Satin Nickel (PVD) .002 Polished Chrome .068 Blackened Bronze (PVD) .295 Satin Nickel (PVD) .002 Polished Chrome .068 Blackened Bronze (PVD) .295 Satin Nickel (PVD) 	127mm (5) REF. (1-5/6 - 5-1/4) (1-5/6 - 5-1/4) (1-1/2) (1-
STANDARD	 T6181 BATH/SHOWER Trim Kit Metal wall escutcheon Porcelain lever handle 5" adjustable showerhead Cast brass diverter tub spout with I.P.S. connection T6180 SHOWER ONLY Trim Kit Metal wall escutcheon Porcelain lever handle 5" adjustable showerhead T6179 VALVE ONLY Trim Kit	T6181 Polished Chrome T6181S Satin Nickel (PVD) T6180 Polished Chrome T6180S Satin Nickel (PVD)	FINISHED 130mm (5-178) HED 130mm (5-178) HED 130mm (5-178) HED 10 10 10 10 10 10 10 10 10 10
E	 Metal wall escutcheon Porcelain lever handle 	T6179 Polished Chrome T6179S Satin Nickel (PVD)	(4) (4) (5.58) TOP OF TUB RIM BOTTOM OF TUB
HAMPTON HANDLE C The second s	Hampton ava To order: spo eg: T211.710	ailable with choice of 3 handles. ecify the 3 digit handle number.) = Hampton Valve Only Trim Kit v	vith Porcelain Lever Handle

American Standard

Style That Works Better

Trim Kits for R110, R110SS, R115, R115SS, R010, R015, R117, R117SS rough valve bodies. Showerhead with 2.5gpm/9.5L/min. maximum flow. TRIM KITS ONLY. VALVE MUST BE ORDERED SEPARATELY.

Trim Kit	Model # Description	Finishes	Roughing-In Dimensions	
TOWN SQUARE	T555.502 BATH/SHOWER Trim Kit • Metal wall escutcheon • Metal lever handle • Cast brass shower arm • 4 1/2" Rain showerhead • Cast brass diverter tub spout with I.P.S. connection	.002 Polished Chrome .068 Blackened Bronze (PVD) .295 Satin Nickel (PVD)	FINISHED WALL + 41mm to 83mm (1-5/8 TO 3-1/4) (2) REF. 122 I.P.S. 180mm (8) REF. 123 I.P.S. 180mm (8) REF. 123 I.P.S.	
	T555.501 SHOWER ONLY Trim Kit • Metal wall escutcheon • Metal lever handle • Cast brass shower arm • 4 1/2" Rain showerhead	.002 Polished Chrome .068 Blackened Bronze (PVD) .295 Satin Nickel (PVD)	CLEARNNE CLEARNNE 457 0PTIONAL + (7-148 BET) + (7-58) 25mm + (7-58) + (7-58) (7-58) + (7	
E	T555.500 VALVE ONLY Trim Kit • Metal wall escutcheon • Metal lever handle	.002 Polished Chrome .068 Blackened Bronze (PVD) .295 Satin Nickel (PVD)	102mm (4) TUB RIM BOTTOM OF TUB	
ONE	T064.502 BATH/SHOWER Trim Kit • Brass wall escutcheon • Adjustable "3 function" showerhead • Cast brass diverter tub spout • LESS Valve	.002 Polished Chrome .295 Satin Nickel (PVD)	FINISHED (1-5/8) REF. (5-5/8) REF. (5-5/8) REF.	
	T064.501 SHOWER ONLY Trim Kit • Brass wall escutcheon • Adjustable "3 function" showerhead • LESS Valve	.002 Polished Chrome .295 Satin Nickel (PVD)	1880mm (74) COLEARANCE CLEARANCE 457 0PHONAL 0PHONAL (12) MAX.)	
E	T064.500 VALVE ONLY Trim Kit • Brass wall escutcheon • LESS Valve	.002 Polished Chrome .295 Satin Nickel (PVD)		