


Submitted Model No.:

Specific Features:

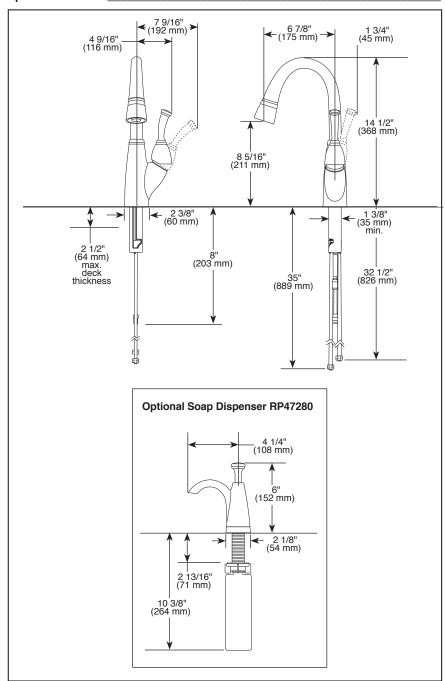

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



BAR / PREP SINK FAUCETS

- Allora[®] Collection
- Single Handle Deck Mount Pull-Down
- Single or 2 Hole Sink Applications
 EZ Anchor[®] Top Down Mounting

- Optional Soap Dispenser
 DIAMOND[®] Seal Technology
- Integrated Supply Tubes
 MagnaTite[®] Docking System

STANDARD SPECIFICATIONS:

- EZ Anchor® top down mounting.
- EZ Bar included to assist during installation.
- 14 1/2" (368 mm) high, 6 7/8" (175 mm) long,
- spout swings 360°
- Lever handle. Control mechanism is the diamond embedded ceramic disc cartridge.
- Single function spray head.
- Quick connect hoses.
- Magnetic docking system secures sprayer to spout.
- Red/Blue graphics on handle button to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Integral hose lead to aide installation.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- 3/8" O.D. straight, staggered PEX supply tubes, 32 1/2" (826 mm) and 35" (889 mm).
- RP61607 clip available with flow rate of 1.5 gpm max. @ 60 PSI.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

 ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1

