Inca Pro Plus Range Hood

versatile pro liner and hood





All in one Professional Liner from Faber. Available in three widths and two depths depending on your needs. With the flexibility of four blower options, the Inca Pro Plus offers the power, style and functionality you need for today's custom pro hood applications.

Model #	Size Color	Performance Range	Sound Levels	
PICK A SIZE				
INPL3619SS	36" W X 19" D			
INPL4219SS	42" W X 19" D			
INPL4819SS	48" W X 19" D			
INPL3622SS	36" W X 22" D			
INPL4822SS	48" W X 22" D			
PICK A BLOWER				
IB300	Internal Blower 300 cfm	60 - 300 cfm	1.0 - 4.0 sones	
IB6oo	Internal Blower 600 cfm	60 - 600 cfm	1.0 - 6.5 sones	
IB1200	Internal Blower 1200 cfm	120 - 1,200 cfm	2.0 - 12.0 sones	
RB900	Remote Blower 900 cfm	120 - 900 cfm		
RB1200	Remote Blower 1200 cfm	120 - 1,200 cfm		




Feature Chart			
Cabinet Cut Out	34 3/4", 40 3/4", 46 3/4" (W) X 19 3/4" OR 22 3/4" (D)		
Convertible to Recirculating	Yes - charcoal filter needed, need air return back into kitchen		
Controls	Varible Speed Dial		
Lighting	2 X 45 (W) Halogen with Dimmer		
Ducting Top	6" Round OR 10" Round		
Grease Filters	dishwasher safe SS baffle		
AC Input	120 V - 60 hz		
AC Power (IB300, IB600, IB1200, 900 RB, 1200 RB)	2.7, 3.6, 6.2, 1.9, 2.6 A at 310, 420, 730, 220, 300 W		
Annual Electricty Costs	\$5.22 / Year * (600 cfm)		

^{*} Note – ran 30 minutes a day on low speed, 365 days, using the North American average of 12.2 cents per kWh. p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com

Dimensional Diagrams

(see installation instructions for more information)

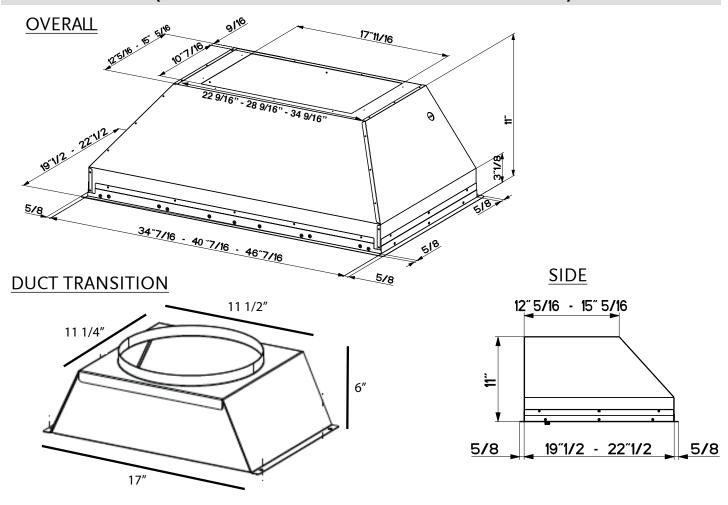

ACCESSORIES

Charcoal Filters # FILTER1

For recirculating installations, high quality, heavy duty filters ensure the removal of smoke and odors from the kitchen. Some ductwork is required to exhaust the unit out of the cabinet.



In-line blower Kit

#INLBKIT Use to connect a separately purchased in-line blower to the range hood

