
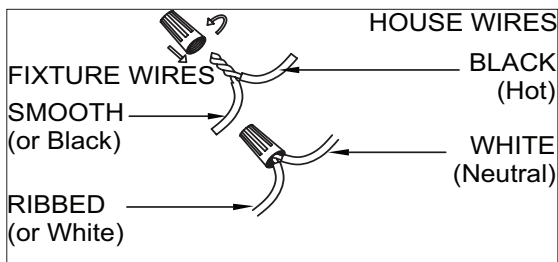


Assembly Instructions: C200-L/R (Sleep)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase to arrange for replacement parts.

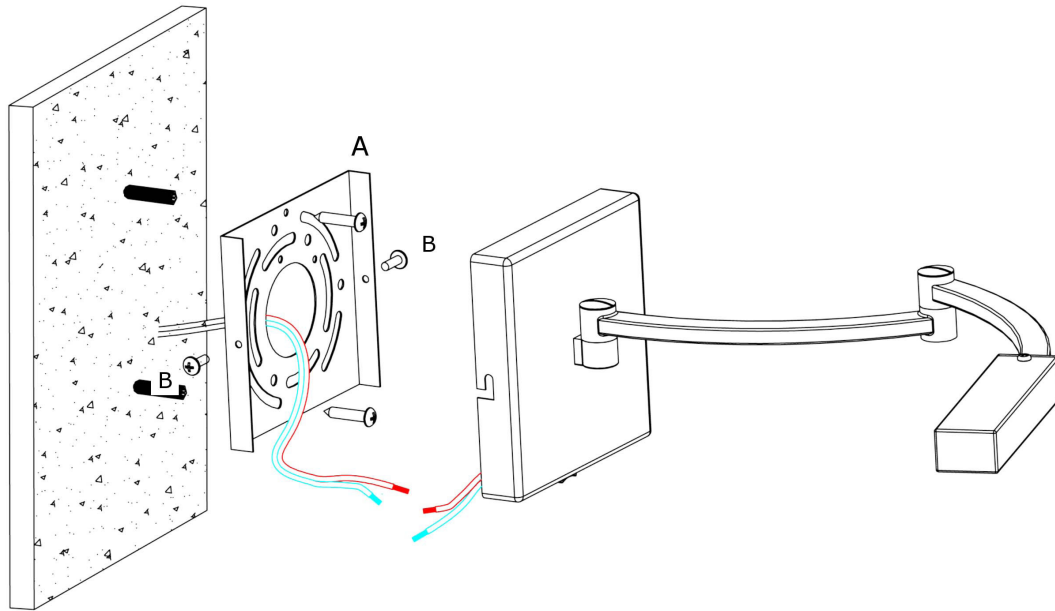

HANGING THE FIXTURE

Locate the posts that protrude from mounting strap (A). Loosely insert screws (B) into these holes. The mounting strap contains several holes. Find the pair of holes that matches the spacing of the holes on the junction box. Bracket (1) may be attached to the back of the fixture's backplate. If so, use a screw driver to remove. This will allow access to the wires.

CONNECTING THE WIRES

Attach the power supply wires from the junction box to the fixture's connection wires. Connect black to black (or smooth) and white to white (or ribbed). Twist the wires together in the same direction that you twist the wire connectors onto the wires and tuck the wires into the junction box.

FINISHING THE INSTALLATION

The fixture backplate has key-holes on the sides. Slide the key-holes over screws (B) which protrude from mounting strap (A). Tighten these screws to secure fixture.

YOUR INSTALLATION IS NOW COMPLETE. YOU MAY RESTORE POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

CLEANING ADVICE:

- To avoid scratches, always use dry, smooth cloths to dust the fixture.
- Never use wet or abrasive cleaning products to clean the light fixture.
- For major cleaning, please disconnect the power at the main switch.

