

PARTS & ASSEMBLY SHEET

Fixture Name: Multi-Family 8355 RBZ

This fixture assembled PO:____

Date:

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note onthis sheet and contact the place of purchase to arrange for replacement parts.

| PARTS LIST | | Company Name:Co. Account #: | | | ŧ: |
|-----------------------------------|--------------------|------------------------------------|-------------|-----------------|------------|
| | | below to be filled out by retailer | | | |
| Mounting strap w/ ground screw | | Junction box screws | } | Threaded rod | |
| lea 3/4"X4" | | 2ea #8-32N*18mm | | 2ea 3/8"*H45mm | |
| Wire connnector | | Hex nut | | Deco nut (round | nut) |
| 3ea P3 Orange | | 2ea @3/8X3mm | | 1ea 3/8"*H9mm | \bigcirc |
| Finial | | Sping washer | \bigcirc | Bottom cap | |
| 1ea Ø13*H9mm | | 1ea Ø15*H3mm | | 1ea 38*H28mm | |
| Part Needed | | | Quantity | | |
| Part Needed | | | Quantity | | |
| Reason why Comments | (missing, scratche | ed, broken glass, bent, | bad finish) | - | |

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Attach the finial (N) to Threaded rod (L) and slide through Bottom Cap (K)


2. Place the Glass Shade (M) flush with the Back plate (J) just under the "L" shaped lip.

3. Slide Bottom cap assembly (K+L+N) into hole at the bottom of Glass shade (M), with the threaded rod going through the hole in bottom of fixture back plate and tighten with Hex nut (O).

*If the glass does not sit flush with the wall remove the glass, gently press the lip up bit to increase glass tension and reinstall the glass.

4. Install the light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

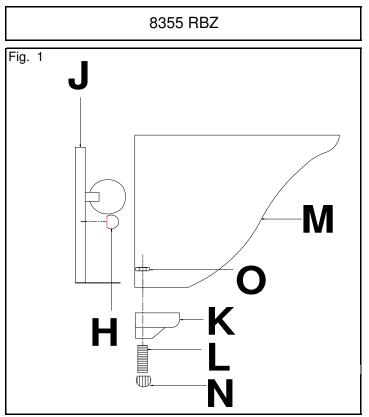

For Customer Service, contact the place of purchase to arrange for replacement parts.



INSTALLATION INSTRUCTIONS

Fixture Name: Multi-Family 8355 RBZ

For Wall Mount Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holes all your parts. Check that all parts are included as shown in the illustration and parts list.

2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.

3. Take Threaded Rod (D) from parts bag and thread into center screw hole on Mounting Strap (A), tighten with Hex Nut (B) and Spring Washer (C).

4. Attach the Mounting Strap (A) to the Junction Box (I) using the two Mounting Screws (E). Tighten the screws securely.

CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).

6. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (A) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture Back Plate (J) over the Threaded Rod (D), so

it protrudes through the hole in the Back Plate (J).

9. Thread the Deco Nut (H) onto the Threaded Rod (D) and


continue turning until the Back Plate (J) is snug against the wall.

10. Install glass as per the fixture assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER

TO THE JUNCTION BOX AND TEST THE FIXTURE.

For Customer Service, contact the place of purchase to arrange for replacement parts.

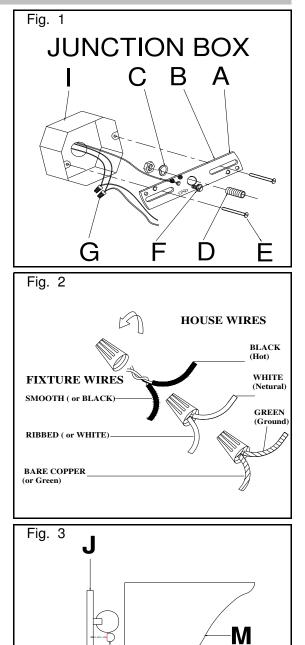

Ο

Κ

н

ന്ന