

Fuzion® 7242 Drop-In/Undermount Bathtub

Letter	Description	Soaking	Whirlpool	Salon® Spa	Pure Air®	Electrical Specifications	
-	Drain Location	Center Drain				Each component requires a separate, dedicated GCFI protected circuit.	
-	Equipment Location	--	Right End			Model with Components	GFCI Outlet (60Hz)
-	Undermount Cutout Template	GR23000				Soaker Only	None
-	Drop-In Cutout Dimensions	70" L x 40" W				Soaker with Chromatherapy	120V / 15A
-	Total Weight	1,242 lbs (563 kg)	1,324 lbs (602 kg)	1,349 lbs (612 kg)	1,305 lbs (592 kg)	Motor/Pump	120V / 20A
-	Floor Loading	59 lb/ft² (290 kg/m²)	63 lb/ft² (307 kg/m²)	64 lb/ft² (313 kg/m²)	62 lb/ft² (303 kg/m²)	Heater	120V / 15A
-	Operating Gallons	108 Gal (409 L)	82 Gal (311 L) min 108 Gal (409 L) max		57 Gal (216 L) min 108 Gal (409 L) max	Motor/Pump and Heater	240V / 20A
-	Product Weight	92 lbs (42 kg)	174 lbs (79 kg)	199 lbs (90 kg)	155 lbs (70 kg)	Blower	120V / 15A
-	Soaking Depth	16.63" (422 mm)				Blower Only	120V / 15A
L	Outer Length	72" (1829 mm)				Blower with Chromatherapy	120V / 15A
W	Outer Width	42" (1067 mm)					
H	Overall Height**	24" (610 mm)					
A	Overflow Height	17" (432 mm)					
B	Long Edge to Drain Center	10.25" (260 mm)					
C	Short Edge to Drain Center	36" (915 mm)					
D	Drain Shoe Length	8.5" (216 mm)					
E	Deck Height**	4" (102 mm)					
F	Deck Width*	3.5" (89 mm)					
G	Service Access Dimensions	12" H x 18" L (305 mm x 457 mm)					
I	Floor Cutout for Drain	18.5" x 4" (470 mm x 102 mm)					
J	Interior Dimensions Bottom of Bath (L x W)	46" x 27" (1168 mm x 686 mm)					
K	Interior Dimensions Top of Bath (L x W)	63" x 30" (1600 mm x 762 mm)					
L2	Interior Depth - Drain End	18" (457 mm)					
M1/M2	Backrest Angle	33° / 27°					

Available Upgrades (Select Models)	
Whisper Quiet Technology	
Illumatherapy	
J5 Luxury LCD Control Panel	


KEY DIMENSIONS [Note: The overall dimensions are nominal with a tolerance of +0 and - .25" (6 mm).]

*Deck width reflects only area indicated on detail.

**Height of tub only. Optional wood frame adds 1.25".

Chrome twist & turn drain included. For other finishes, replace with standard parts & 1.5" drain elbow.

Salon® Spa model shown

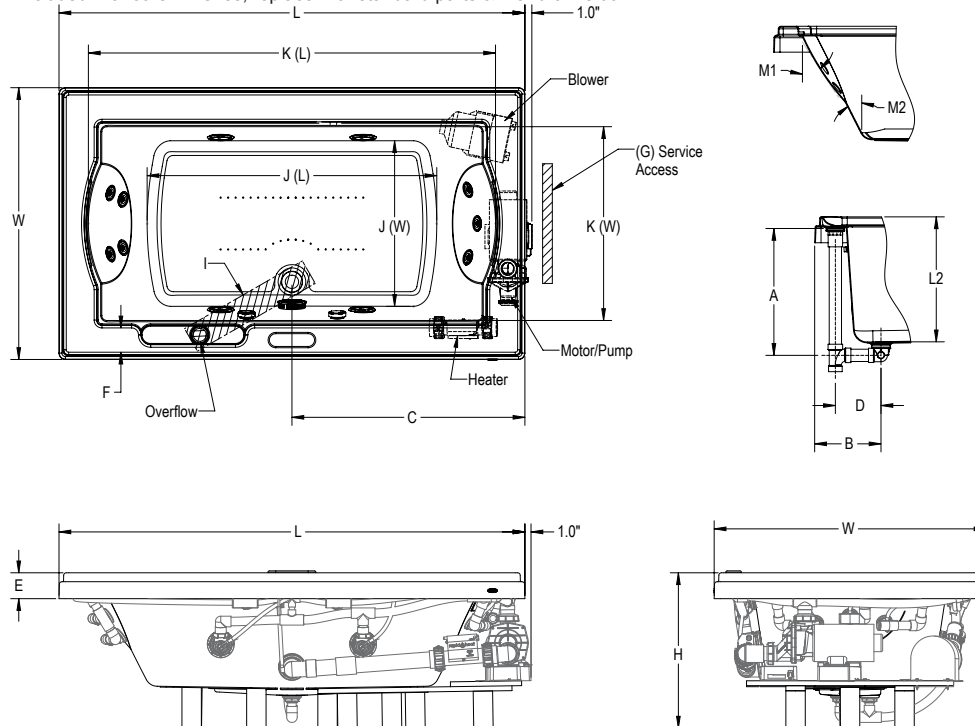

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE