



**Camerton™**  
Service Sink  
**K-12867**

**Features**

- Vitreous china.
- Wall-mount.
- Deep squared basin.
- No faucet holes; requires wall-mount faucet.
- 1-1/2" (38 mm) top stud.
- Blow-out action flushing rim.
- 21-1/2" (546 mm) x 25" (635 mm)

**Recommended Accessories**

K-8935 Stainless Steel Rim Guard  
K-13864 Sink Strainer

**Components**

Additional included component/s: 1 1/2" (38mm) top stud.



**Codes/Standards**

ASME A112.19.2/CSA B45.1

**KOHLER® One-Year Limited Warranty**


See website for detailed warranty information.

**Available Color/Finishes**

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
--	---	-------

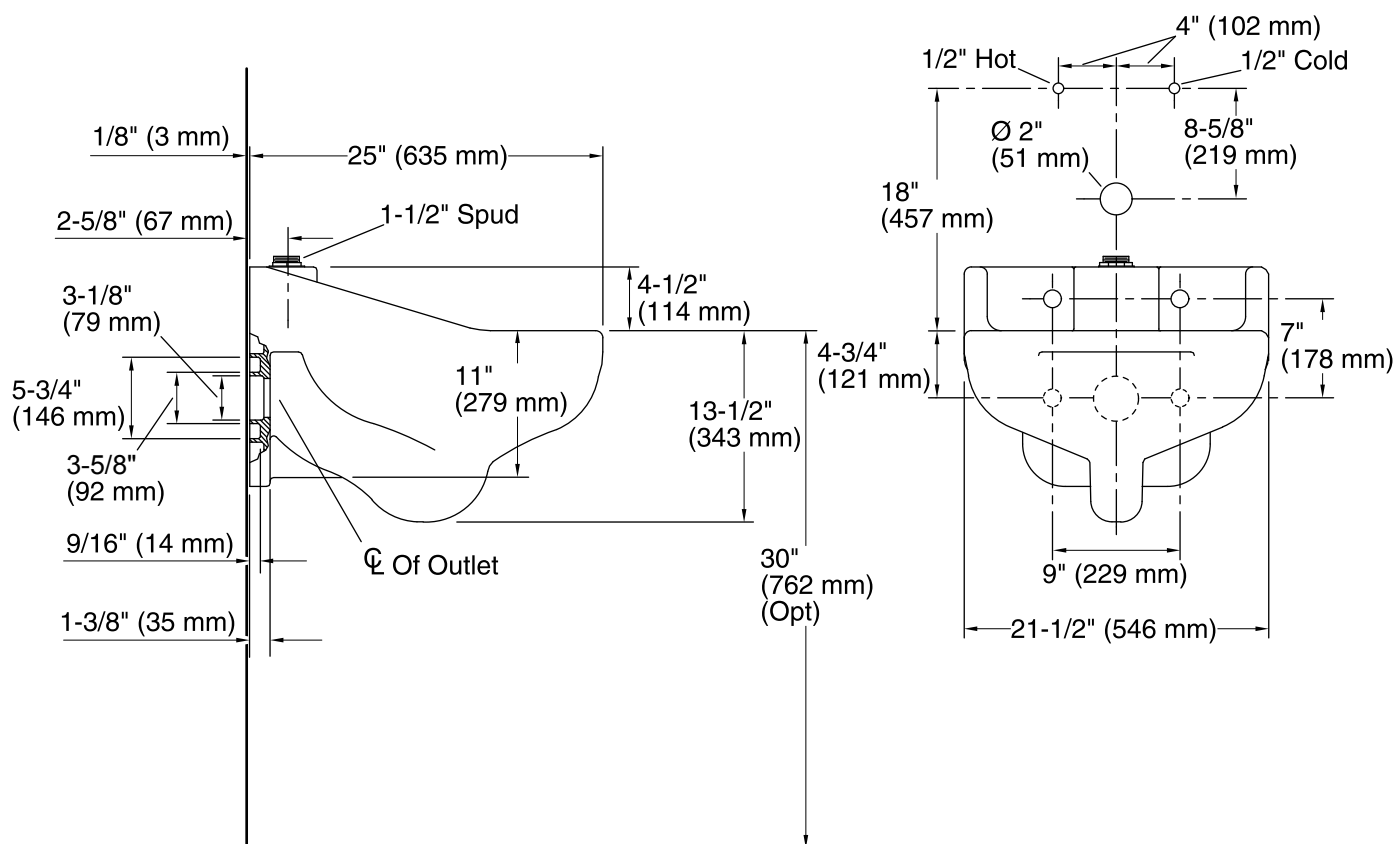

## Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Wall-mount

Bowl area (Only) Length: 18" (457 mm)  
Width: 18" (457 mm)  
Water depth: 6-1/4" (159 mm)

## Notes

Install this product according to the installation instructions.

Minimum flowing pressure required: 25 psi (172.4 kPa)

Minimum flow rate required: 25 gpm (94.6 lpm)