KOHLER® FAUCETS
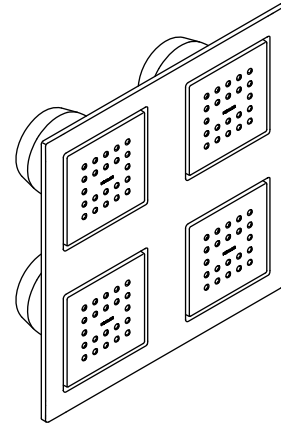
Features

- *Available in a variety of Kohler finishes that resist tarnishing and corrosion*
- *Integrated system for ceiling installation*
- *Four 22-nozzle sprayheads*
- *Individually adjustable pivoting sprayheads simulate a gentle summer rain showering experience*
- *Low profile design complements any décor*
- *Easy to clean MasterClean™ sprayface*
- *1/2″ NPT connections*
- *Soldering template included to simplify installation process*
- *0.6 gal/min (2.3 l/min) maximum flow rate from each sprayhead (at 80 psi [552 kPa])*
- *Maximum combined flow of 2.5 gal/min (9.6 l/min)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.18.1/CSA B125.1*
- *Energy Policy Act of 1992*

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-98740	Overhead showering panel	❏ CP	❏ Other_____

Product Specification

The overhead showering panel shall have integrated system for ceiling installation. Panel shall have four 22-nozzle sprayheads. Panel shall feature individually adjustable pivoting sprayheads to simulate a gentle summer rain showering experience. Panel shall feature a low profile design, which complements any décor. Panel shall have a 0.6 gal/min (2.3 l/min) maximum flow rate from each sprayhead (at 80 psi [552 kPa]) and a maximum combined flow of 2.5 gal/min (9.6 l/min). Panel shall be available with a variety of Kohler finishes that resist tarnishing and corrosion. Panel shall have an easy-to-clean MasterClean sprayface. Panel shall have 1/2″ NPT connections. Panel shall include a soldering template to simplify installation process. Overhead showering panel shall be Kohler Model K-98740-_____.
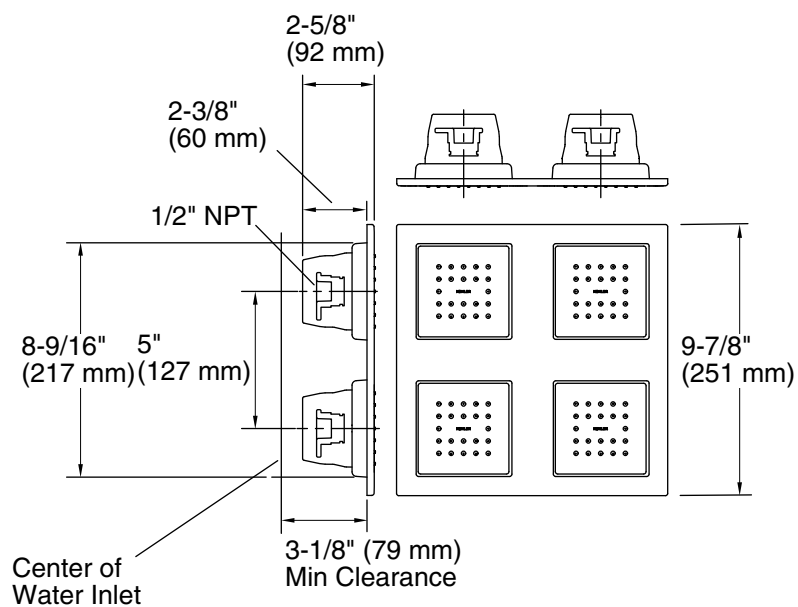
WATERTILE® RAIN

Technical Information

Included components:	
Soldering template	1054349
Hex bit	1071652

Cutout dimension:
9″ (229 mm) to 9-1/4″ (235 mm) x 9″ (229 mm) to 9-1/4″ (235 mm)

Installation Notes

Install this product according to the installation guide.

2-5/8"
(92 mm)

2-3/8"
(60 mm)

1/2" NPT

8-9/16"   5"
(217 mm) (127 mm)

9-7/8"
(251 mm)

Center of
Water Inlet

3-1/8" (79 mm)
Min Clearance

Product Diagram

THE BOLD LOOK
OF **KOHLER**®